

# Тормозная система

## Технические характеристики

По вопросам продаж и поддержки обращайтесь:

Алматы (727)345-47-04  
Ангарск (3955)60-70-56  
Архангельск (8182)63-90-72  
Астрахань (8512)99-46-04  
Барнаул (3852)73-04-60  
Белгород (4722)40-23-64  
Благовещенск (4162)22-76-07  
Брянск (4832)59-03-52  
Владивосток (423)249-28-31  
Владикавказ (8672)28-90-48  
Владимир (4922)49-43-18  
Волгоград (844)278-03-48  
Вологда (8172)26-41-59  
Воронеж (473)204-51-73  
Екатеринбург (343)384-55-89

Иваново (4932)77-34-06  
Ижевск (3412)26-03-58  
Иркутск (395)279-98-46  
Казань (843)206-01-48  
Калининград (4012)72-03-81  
Калуга (4842)92-23-67  
Кемерово (3842)65-04-62  
Киров (8332)68-02-04  
Коломна (4966)23-41-49  
Кострома (4942)77-07-48  
Краснодар (861)203-40-90  
Красноярск (391)204-63-61  
Курск (4712)77-13-04  
Курган (3522)50-90-47  
Липецк (4742)52-20-81

Магнитогорск (3519)55-03-13  
Москва (495)268-04-70  
Мурманск (8152)59-64-93  
Набережные Челны (8552)20-53-41  
Нижний Новгород (831)429-08-12  
Новокузнецк (3843)20-46-81  
Ноябрьск (3496)41-32-12  
Новосибирск (383)227-86-73  
Омск (3812)21-46-40  
Орел (4862)44-53-42  
Оренбург (3532)37-68-04  
Пенза (8412)22-31-16  
Петрозаводск (8142)55-98-37  
Псков (8112)59-10-37  
Пермь (342)205-81-47

Ростов-на-Дону (863)308-18-15  
Рязань (4912)46-61-64  
Самара (846)206-03-16  
Санкт-Петербург (812)309-46-40  
Саратов (845)249-38-78  
Севастополь (8692)22-31-93  
Саранск (8342)22-96-24  
Симферополь (3652)67-13-56  
Смоленск (4812)29-41-54  
Сочи (862)225-72-31  
Ставрополь (8652)20-65-13  
Сургут (3462)77-98-35  
Сыктывкар (8212)25-95-17  
Тамбов (4752)50-40-97  
Тверь (4822)63-31-35

Тольятти (8482)63-91-07  
Томск (3822)98-41-53  
Тула (4872)33-79-87  
Тюмень (3452)66-21-18  
Ульяновск (8422)24-23-59  
Улан-Удэ (3012)59-97-51  
Уфа (347)229-48-12  
Хабаровск (4212)92-98-04  
Чебоксары (8352)28-53-07  
Челябинск (351)202-03-61  
Череповец (8202)49-02-64  
Чита (3022)38-34-83  
Якутск (4112)23-90-97  
Ярославль (4852)69-52-93

**Россия** +7(495)268-04-70

**Казахстан** +7(727)345-47-04

**Беларусь** +(375)257-127-884

**Узбекистан** +998(71)205-18-59

**Киргизия** +996(312)96-26-47

эл.почта: [cse@nt-rt.ru](mailto:cse@nt-rt.ru) || сайт: <https://crc.nt-rt.ru/>



Part No. 05084PS

Item# 1008010

# CRC® Brakleen® Pro Series Brake Parts Cleaner - Non-Chlorinated Low VOC, 19 Wt Oz

## Description

Maintaining clean brake and disc parts can improve the life of your car's braking system and keep you safe on the roads. Using a brake parts cleaner for cleaning and degreasing is a great way to maximize the performance and increase the longevity of your entire brake system. CRC Brakleen® offers a powerful low VOC spray cleaner that works like no other. The Brakleen® Pro-Series line is designed for superior performance where it's needed most: IN THE SHOP!

## Applications

- All Brake Parts: ABS
- Drum
- Brake Drums
- Brake Shoes
- Clutch Discs
- Discs Safe For Use on All Brake Systems Including Springs & Wedge Brakes
- Disc
- Brake Cylinders
- Brake Linings
- Calipers
- Disc Brake Pads

Appearance \_\_\_\_\_ Clear Liquid

Brand \_\_\_\_\_ CRC

Case# \_\_\_\_\_ 1003697

DOT Proper Shipping Name \_\_\_\_\_ Aerosols, Flammable, Limited Quantity

Evaporation Rate \_\_\_\_\_ Fast

Flammability Class - CPSC \_\_\_\_\_ Extremely Flammable

Flash point (C) \_\_\_\_\_ -17.8°C

Flash point (F) \_\_\_\_\_ 0°F

Generic Description \_\_\_\_\_ Non-Chlorinated Low VOC  
w/PowerJet® Actuator

I 2 of 5 Code \_\_\_\_\_ 30078254350845

Item Number \_\_\_\_\_ 05084PS

Net Fill \_\_\_\_\_ 19 Wt Oz

Plastic Safe \_\_\_\_\_ No

Propellant \_\_\_\_\_ Carbon Dioxide

Restricted From Sale In \_\_\_\_\_ CA, CO, CT, DE, MD, MI, NH,  
NY, OH, RI, parts of UT

UPC Code \_\_\_\_\_ 078254350844

Unit Dimensions \_\_\_\_\_ 9.19H x 3.0W x 3.0D in

Unit Package Description \_\_\_\_\_ 300 x 709 Aerosol

Units per Case \_\_\_\_\_ 1

VOC % (Consumer Product def) \_\_\_\_\_ 40.5

VOC % (Federal) \_\_\_\_\_ 40.5

VOC Category \_\_\_\_\_ Brake Cleaner

VOC Lbs./Gal. (Federal) \_\_\_\_\_ 2.7

VOC g/L (Consumer Product def) \_\_\_\_\_ 326

VOC g/L (Federal) \_\_\_\_\_ 326

VOC lbs/gal (Consumer Prod def) \_\_\_\_\_ 2.7

---



Part No. 05151

Item# 1003740

# CRC® Brakleen® Brake Parts Cleaner, SCAQMD #1171 Compliant, 14 Wt Oz

## Description

Maintaining clean brake and disc parts can improve the life of your car's braking system and keep you safe on the roads. Using a brake parts cleaner for cleaning and degreasing is a great way to maximize the performance and increase the longevity of your entire brake system. While there are several non-chlorinated brake cleaners on the market, not all can guarantee the cleaning power and effectiveness you need. CRC Brakleen® offers a powerful spray cleaner that works like no other and is compliant with VOC regulations in every area of the country.

## Applications

Safe For Use on All Brake Systems Including:

- ABS
- Drum
- Brake Drums
- Brake Shoes
- Clutch Discs
- Discs
- Disc
- Brake Cylinders
- Brake Linings
- Calipers
- Disc Brake Pads
- Springs & Wedge Brakes

Appearance Clear Colorless Liquid

Brand CRC

Case# 1003739

Color None

DOT Proper Shipping Name Aerosols, Flammable, Limited Quantity

Evaporation Rate Fast

Flammability Class - CPSC Extremely Flammable

Flash point (C) <-17.8°C

Flash point (F) <0°F

Generic Description Non-Chlorinated Brake Parts Cleaner

I 2 of 5 Code 30078254051513

Item Number 05151

Net Fill 14 Wt Oz

Plastic Safe No

Propellant Carbon Dioxide

Specific Gravity 0.7935

UPC Code 078254051512

Unit Dimensions 9.25H x 2.63W x 2.63D in

Unit Package Description 20 Ounce Aerosol

Units per Case 12

VOC % (Consumer Product def) 2.7

VOC % (Federal) 2.7

VOC Category Brake Cleaner

VOC Lbs./Gal. (Federal) 0.35

VOC g/L (Consumer Product def) 21.4

VOC g/L (Federal) 41.9

VOC lbs/gal (Consumer Prod def) 0.18

---



Part No. 05089

Item# 1003708

# CRC® Brakleen® Brake Parts Cleaner, 19 Wt Oz

## Description

Maintaining clean brake and disc parts can improve the life of your car's braking system and keep you safe on the roads. Using a brake cleaner for cleaning and degreasing is a great way to maximize the performance and increase the longevity of your entire brake system. While there are several brake cleaners on the market, not all can guarantee the cleaning power and effectiveness you need. CRC Brakleen® has consistently been a top choice of automotive professionals for the past 50 years.

## Applications

Safe For Use on All Brake Systems Including:

- ABS
- Drum
- Brake Drums
- Brake Shoes
- Clutch Discs
- Discs
- Disc
- Brake Cylinders
- Brake Linings
- Calipers
- Disc Brake Pads
- Springs & Wedge Brakes

Appearance \_\_\_\_\_ Colorless Liquid

Brand \_\_\_\_\_ CRC

Case# \_\_\_\_\_ 1003706

Color \_\_\_\_\_ None

DOT Proper Shipping Name \_\_\_\_\_ Aerosols, Poison, Limited  
Quantity

Dielectric Strength \_\_\_\_\_ 37,500 Volts

Dry Time Fully Dry \_\_\_\_\_ Fast

Evaporation Rate \_\_\_\_\_ Very Fast

Flammability Class - CPSC \_\_\_\_\_ None

Flash point (C) \_\_\_\_\_ None

Flash point (F) \_\_\_\_\_ None

Ford Tox No. \_\_\_\_\_ 042100

Generic Description \_\_\_\_\_ Brake Parts Cleaner

I 2 of 5 Code \_\_\_\_\_ 30078254050899

Item Number \_\_\_\_\_ 05089

KB Value \_\_\_\_\_ 95

Net Fill \_\_\_\_\_ 19 Wt Oz

Plastic Safe \_\_\_\_\_ No

Propellant \_\_\_\_\_ Carbon Dioxide

Restricted From Sale In \_\_\_\_\_ CA, NJ

Specific Gravity \_\_\_\_\_ 1.62

UPC Code \_\_\_\_\_ 078254050898

Unit Dimensions \_\_\_\_\_ 9.25H x 2.63W x 2.63D in

Unit Package Description \_\_\_\_\_ 20 Ounce Aerosol

Units per Case \_\_\_\_\_ 12

VOC % (Consumer Product def) \_\_\_\_\_ 0

VOC % (Federal) \_\_\_\_\_ 0

VOC Category \_\_\_\_\_ Brake Cleaner

VOC Lbs./Gal. (Federal) \_\_\_\_\_ 0

VOC g/L (Consumer Product  
def) \_\_\_\_\_ 0

VOC g/L (Federal) \_\_\_\_\_ 0

VOC lbs/gal (Consumer Prod  
def) \_\_\_\_\_ 0

---



Part No. 05089PS

Item# 1008012

# CRC® Brakleen® Pro-Series Brake Parts Cleaner - Non-Flammable, 29 Wt Oz

## Description

Maintaining clean brake and disc parts can improve the life of your car's braking system and keep you safe on the roads. Using a brake cleaner for cleaning and degreasing is a great way to maximize the performance and increase the longevity of your entire brake system. CRC Brakleen® is the #1 brand of brake cleaner worldwide and has consistently been a top choice of automotive professionals for the past 50 years. The Brakleen® Pro-Series line is designed for superior performance where it's needed most: IN THE SHOP!

## Applications

Safe For Use on All Brake Systems Including:

- ABS
- Drum
- Brake Drums
- Brake Shoes
- Clutch Discs
- Discs
- Disc
- Brake Cylinders
- Brake Linings
- Calipers
- Disc Brake Pads
- Springs & Wedge Brakes



Appearance \_\_\_\_\_ Colorless Liquid

Brand \_\_\_\_\_ CRC

Case# \_\_\_\_\_ 1003709

DOT Proper Shipping Name \_\_\_\_\_ Aerosols, Non-Flammable, Limited  
Quantity

Dielectric Strength \_\_\_\_\_ 37,500 Volts

Dry Time Fully Dry \_\_\_\_\_ Fast

Evaporation Rate \_\_\_\_\_ Very Fast

Flammability Class - CPSC \_\_\_\_\_ None

Flash point (C) \_\_\_\_\_ None

Flash point (F) \_\_\_\_\_ None

Ford Tox No. \_\_\_\_\_ 042100

Generic Description \_\_\_\_\_ Brake Parts Cleaner

I 2 of 5 Code \_\_\_\_\_ 30078254350890

Item Number \_\_\_\_\_ 05089PS

KB Value \_\_\_\_\_ 95

Net Fill \_\_\_\_\_ 29 Wt Oz

Plastic Safe \_\_\_\_\_ No

Propellant \_\_\_\_\_ Carbon Dioxide

Restricted From Sale In \_\_\_\_\_ CA, NJ

UPC Code \_\_\_\_\_ 078254350899

Unit Dimensions \_\_\_\_\_ 9.19H x 3W x 3D in

Unit Package Description \_\_\_\_\_ 24 Ounce Aerosol

Units per Case \_\_\_\_\_ 1

VOC % (Consumer Product def) \_\_\_\_\_ 0

VOC % (Federal) \_\_\_\_\_ 0

VOC Category \_\_\_\_\_ Brake Cleaner

VOC Lbs./Gal. (Federal) \_\_\_\_\_ 0

VOC g/L (Consumer Product  
def) \_\_\_\_\_ 0

VOC g/L (Federal) \_\_\_\_\_ 0

VOC lbs/gal (Consumer Prod  
def) \_\_\_\_\_ 0

---



Part No. 05089T

Item# 1003711

# CRC® Brakleen® Brake Parts Cleaner, 19 Wt Oz

## Discontinued

Discontinued product number may still be available for a limited time through your local supplier or retailer.

### Description

The original brake parts cleaner. Formulated to quickly & effectively remove grease, brake dust, brake fluids, oils, & other contaminants from brake parts, lining, pads.

### Applications

Safe For Use on All Brake Systems Including:

- ABS
- Drum
- Brake Drums
- Brake Shoes
- Clutch Discs
- Discs
- Disc
- Brake Cylinders
- Brake Linings
- Calipers
- Disc Brake Pads
- Springs & Wedge Brakes

Appearance \_\_\_\_\_ Colorless Liquid

Brand \_\_\_\_\_ CRC

Case# \_\_\_\_\_ 1003710

Color \_\_\_\_\_ None

DOT Proper Shipping Name \_\_\_\_\_ Aerosols, Poison, Limited  
Quantity

Dielectric Strength \_\_\_\_\_ 37,500 Volts

Dry Time Fully Dry \_\_\_\_\_ Fast

Evaporation Rate \_\_\_\_\_ Very Fast

Flammability Class - CPSC \_\_\_\_\_ None

Flash point (C) \_\_\_\_\_ None

Flash point (F) \_\_\_\_\_ None

Generic Description \_\_\_\_\_ Brake Parts Cleaner

I 2 of 5 Code \_\_\_\_\_ 30078254150896

Item Number \_\_\_\_\_ 05089T

KB Value \_\_\_\_\_ 95

Net Fill \_\_\_\_\_ 19 Wt Oz

Plastic Safe \_\_\_\_\_ No

Product Lifecycle Status \_\_\_\_\_ DISC

Propellant \_\_\_\_\_ Carbon Dioxide

Restricted From Sale In \_\_\_\_\_ CA, NJ

Specific Gravity \_\_\_\_\_ 1.62

UPC Code \_\_\_\_\_ 078254150895

Unit Dimensions \_\_\_\_\_ 10H x 2.63W x 2.63D in

Unit Package Description \_\_\_\_\_ 20 ounce Aerosol with Trigger

Units per Case \_\_\_\_\_ 12

VOC % (Consumer Product def) \_\_\_\_\_ 0

VOC % (Federal) \_\_\_\_\_ 0

VOC Category \_\_\_\_\_ Brake Cleaner


VOC Lbs./Gal. (Federal) \_\_\_\_\_ 0

VOC g/L (Consumer Product  
def) \_\_\_\_\_ 0

VOC g/L (Federal) \_\_\_\_\_ 0

VOC lbs/gal (Consumer Prod  
def) \_\_\_\_\_ 0

---

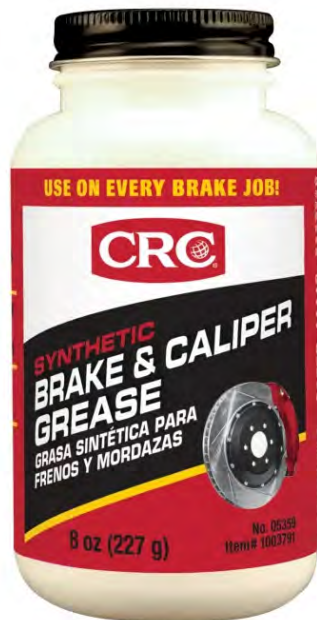

Part No. 05359

Item# 1003791

## CRC® Brake Caliper Synthetic Grease, 8 oz. tub

### Description

A specially developed synthetic grease with a high-tech formula for use in disc & drum brake systems. High temperature grease is plastic & rubber safe. Use on metal to metal contact points and sliding surfaces. Resists moisture and will not washout.

### Applications

- Backing Plates
- Caliper O-Rings
- Disc Brake Pads
- Grommets
- Pivot Points
- Brake Pad Contact Points
- Calipers
- Drum Brake Systems
- Parking Brake Areas of Lubrication
- Self Adjusters

4 Ball Wear 0.67 mm

Brand CRC

Color None

Drop Point >600°F

Evaporation Rate Slow

Flammability Class - CPSC None

Flash point (F) 500°F

I 2 of 5 Code 30078254053593

Leakage None

Net Fill 8 Fl Oz

Plastic Safe Yes

Pour Point (C) -29°C

Propellant None

Specific Gravity 0.89

UPC Code 078254053592

Unit Package Description 8 Ounce Bottle

VOC % (Consumer Product def) 0

VOC Category Not Regulated

VOC lbs/gal (Consumer Prod def) No

Worked Penetration 265 to 295

Working Temp (F) -40 to 495°F

Appearance Black Semi-Solid Grease

Case# 1003790

DOT Proper Shipping Name Not Regulated

Elastomer Compatibility EPDM

Federal Specification Number 0.58

Flash point (C) 260°C

Generic Description Brake Caliper Synthetic Grease

Item Number 05359

NLGI Grade 2

Oil Separation 7.4

Pour Point -20°F

Pour Point (F) -40°F

Removal (How To) Remove with a degreaser or brake cleaner product.

Timken OK Load [Lbs.] 50 Lbs

Unit Dimensions 4.25H x 2.5W x 2.5D in

Units per Case 6

VOC % (Federal) 0.58

VOC g/L (Consumer Product def) No

Water Washout 1.68

Working Temp (C) -40 to 257°C



Part No. 05088

Item# 1003704

# CRC® Brakleen Brake Parts Cleaner - Non-Chlorinated, 14 Wt Oz

## Description

Now Even Stronger - As the market leader in brake parts cleaning technology, CRC Industries is continuously innovating to provide products with a competitive edge that work better and faster to make our end-users' jobs easier. To that end, we are excited to introduce the latest improvement in a long line of premium, high-performing products. Announcing an improved formula for our High VOC Non-Chlorinated Brake Cleaner - 05088. The new, more powerful formula cleans and dries faster using less product, allowing end-users to get more accomplished.

## Applications

Safe For Use on All Brake Systems Including:

- ABS
- Drum
- Brake Drums
- Brake Shoes
- Clutch Discs
- Discs
- Disc
- Brake Cylinders
- Brake Linings
- Calipers
- Disc Brake Pads
- Springs & Wedge Brakes

Appearance \_\_\_\_\_ colorless, liquid

Brand \_\_\_\_\_ CRC

Case# \_\_\_\_\_ 1003703

Color \_\_\_\_\_ None

DOT Proper Shipping Name \_\_\_\_\_ Aerosols, Flammable, LIMITED  
QUANTITY

Evaporation Rate \_\_\_\_\_ Fast

Film Type \_\_\_\_\_ N/A

Flammability Class - CPSC \_\_\_\_\_ Extremely Flammable

Flash point (C) \_\_\_\_\_ -9

Flash point (F) \_\_\_\_\_ 15.8

Ford Tox No. \_\_\_\_\_ 1281491

Generic Description \_\_\_\_\_ Non-Chlorinated Brake Parts  
Cleaner

I 2 of 5 Code \_\_\_\_\_ 30078254050882

Item Number \_\_\_\_\_ 05088

Net Fill \_\_\_\_\_ 14 Wt Oz

Plastic Safe \_\_\_\_\_ No

Propellant \_\_\_\_\_ Carbon Dioxide

Removal (How To) \_\_\_\_\_ N/A

Restricted From Sale In \_\_\_\_\_ CA, CO, CT, DC, DE, IL, IN, ME,  
MD, MA, MI, NH, NJ, NY, OH,  
PA, RI, parts of UT, VA

Specific Gravity \_\_\_\_\_ 0.7824

UPC Code \_\_\_\_\_ 078254050881

Unit Dimensions \_\_\_\_\_ 9.25H x 2.63W x 2.63D in

Unit Package Description \_\_\_\_\_ 20 Ounce Aerosol

Units per Case \_\_\_\_\_ 12

VOC % (Consumer Product def) \_\_\_\_\_ 95.8

VOC % (Federal) \_\_\_\_\_ 95.8

VOC Category \_\_\_\_\_ Brake Cleaner

VOC Lbs./Gal. (Federal) \_\_\_\_\_ 5.84

VOC g/L (Consumer Product def) \_\_\_\_\_ 700

VOC g/L (Federal) \_\_\_\_\_ 700

VOC lbs/gal (Consumer Prod def) \_\_\_\_\_ 5.84

---



Part No. 05050PS

Item# 1008009

# CRC® Brakleen® Pro Series Brake Parts Cleaner - 50 State Compliant, 20 Wt Oz

## Description

Maintaining clean brake and disc parts can improve the life of your car's braking system and keep you safe on the roads. Using a brake parts cleaner for cleaning and degreasing is a great way to maximize the performance and increase the longevity of your entire brake system. CRC Brakleen® offers a powerful spray cleaner that works like no other and is compliant with VOC regulations for all 50 states. The Brakleen® Pro-Series line is designed for superior performance where it's needed most: IN THE SHOP!

## Applications

Safe For Use on All Brake Systems Including:

- ABS
- Disc
- Drum
- Brake Cylinders
- Brake Drums
- Brake Linings
- Brake Shoes
- Calipers
- Clutch Discs
- Disc Brake Pads
- Discs
- Springs & Wedge Brakes



Appearance \_\_\_\_\_ Clear Liquid

Case# \_\_\_\_\_ 1003663

Evaporation Rate \_\_\_\_\_ Fast

Flash point (C) \_\_\_\_\_ <-18°C

Generic Description \_\_\_\_\_ 50-State Compliant Formula  
w/PowerJet® Actuator

Item Number \_\_\_\_\_ 05050PS

Plastic Safe \_\_\_\_\_ No

Removal (How To) \_\_\_\_\_ Not Applicable

Unit Dimensions \_\_\_\_\_ 9.19H x 3W x 3D in

Units per Case \_\_\_\_\_ 12

VOC % (Federal) \_\_\_\_\_ 9.28

VOC Lbs./Gal. (Federal) \_\_\_\_\_ 0.68

VOC g/L (Federal) \_\_\_\_\_ 80.9

Brand \_\_\_\_\_ CRC

DOT Proper Shipping Name \_\_\_\_\_ Aerosols, Flammable, Limited  
Quantity

Flammability Class - CPSC \_\_\_\_\_ Extremely Flammable

Flash point (F) \_\_\_\_\_ <0°F

I 2 of 5 Code \_\_\_\_\_ 30078254350500

Net Fill \_\_\_\_\_ 20 Wt Oz

Propellant \_\_\_\_\_ Carbon Dioxide

UPC Code \_\_\_\_\_ 078254350509

Unit Package Description \_\_\_\_\_ 24 Ounce Aerosol

VOC % (Consumer Product def) \_\_\_\_\_ 9.3

VOC Category \_\_\_\_\_ Brake Cleaner

VOC g/L (Consumer Product  
def) \_\_\_\_\_ 80.9

VOC lbs/gal (Consumer Prod  
def) \_\_\_\_\_ 0.68

---



Part No. 05050

Item# 1003662

# CRC® Brakleen® Non-Chlorinated Brake Parts Cleaner, 14 Wt Oz

## Description

Maintaining clean brake and disc parts can improve the life of your car's braking system and keep you safe on the roads. Using a brake parts cleaner for cleaning and degreasing is a great way to maximize the performance and increase the longevity of your entire brake system. While there are several non-chlorinated brake cleaners on the market, not all can guarantee the cleaning power and effectiveness you need. CRC Brakleen® offers a powerful spray cleaner that works like no other and is compliant with VOC regulations for all 50 states.

## Applications

Safe For Use on All Brake Systems Including:

- ABS
- Drum
- Brake Drums
- Brake Shoes
- Clutch Discs
- Discs
- Disc
- Brake Cylinders
- Brake Linings
- Calipers
- Disc Brake Pads
- Springs & Wedge Brakes

Appearance \_\_\_\_\_ Clear Liquid

Brand \_\_\_\_\_ CRC

Case# \_\_\_\_\_ 1003660

Color \_\_\_\_\_ None

DOT Proper Shipping Name \_\_\_\_\_ Aerosols, Flammable, Limited  
Quantity

Dielectric Strength \_\_\_\_\_ 6,300 Volts

Evaporation Rate \_\_\_\_\_ Fast

Flammability Class - CPSC \_\_\_\_\_ Extremely Flammable

Flash point (C) \_\_\_\_\_ <-17.8°C

Flash point (F) \_\_\_\_\_ <0°F

Generic Description \_\_\_\_\_ Non-Chlorinated, Low VOC  
Brake Parts Cleaner

I 2 of 5 Code \_\_\_\_\_ 30078254050509

Item Number \_\_\_\_\_ 05050

KB Value \_\_\_\_\_ >200

Net Fill \_\_\_\_\_ 14 Wt Oz

Plastic Safe \_\_\_\_\_ No

Propellant \_\_\_\_\_ Carbon Dioxide

Specific Gravity \_\_\_\_\_ 0.78

UPC Code \_\_\_\_\_ 078254050508

Unit Dimensions \_\_\_\_\_ 9.25H x 2.63W x 2.63D in

Unit Package Description \_\_\_\_\_ 20 Ounce Aerosol

Units per Case \_\_\_\_\_ 12

VOC % (Consumer Product def) \_\_\_\_\_ 9.2

VOC % (Federal) \_\_\_\_\_ 9.2

VOC Category \_\_\_\_\_ Brake Cleaner

VOC Lbs./Gal. (Federal) \_\_\_\_\_ 0.65

VOC g/L (Consumer Product def) \_\_\_\_\_ 77.4

VOC g/L (Federal) \_\_\_\_\_ 77.4

VOC lbs/gal (Consumer Prod def) \_\_\_\_\_ 0.65

---



Part No. 05084

Item# 1003696

# CRC® Brakleen® Brake Parts Cleaner - Non-Chlorinated, 14 Wt Oz

## Description

Maintaining clean brake and disc parts can improve the life of your car's braking system and keep you safe on the roads. Using a brake parts cleaner for cleaning and degreasing is a great way to maximize the performance and increase the longevity of your entire brake system. While there are several non-chlorinated brake cleaners on the market, not all can guarantee the cleaning power and effectiveness you need. CRC Brakleen® offers a low VOC spray cleaner that works like no other.

## Applications

Safe For Use on All Brake Systems Including:

- ABS
- Drum
- Brake Drums
- Brake Shoes
- Clutch Discs
- Discs
- Disc
- Brake Cylinders
- Brake Linings
- Calipers
- Disc Brake Pads
- Springs & Wedge Brakes

Appearance Clear Liquid

Brand CRC

Case# 1003695

Color None

DOT Proper Shipping Name Aerosols, Flammable, Limited Quantity (Marine Pollutant)

Elastomer Compatibility No

Evaporation Rate Fast

Flammability Class - CPSC Extremely Flammable

Flash point (C) <-17.8°C

Flash point (F) <0°F

Ford Tox No. 177615

Generic Description Non-Chlorinated Brake Parts Cleaner

I 2 of 5 Code 30078254050844

Item Number 05084

Net Fill 14 Wt Oz

Plastic Safe No

Propellant Carbon Dioxide

Restricted From Sale In CA, CO, CT, DE, MD, MI, NH, NY, OH, RI, parts of UT

Specific Gravity 0.7845

UPC Code 078254050843

Unit Dimensions 9.25H x 2.63W x 2.63D in

Unit Package Description 20 Ounce Aerosol

Units per Case 12

VOC % (Consumer Product def) 43.9

VOC % (Federal) 43.8

VOC Category Brake Cleaner

VOC Lbs./Gal. (Federal) 5.7

VOC g/L (Consumer Product def) 344.6

VOC g/L (Federal) 679.2

VOC lbs/gal (Consumer Prod def) 2.87



Part No. SL3301

Item# 1007898

# Sta-Lube® Synthetic Brake & Caliper Grease, 2.5 Wt Oz

## Description

A specially developed synthetic grease with a high-tech formula for use in disc & drum brake systems. High temperature grease is plastic & rubber safe. Use on metal to metal contact points and sliding surfaces. Resists moisture and will not washout.

## Applications

- Backing Plates
- Brake Pad Contact Points
- Caliper O-Rings
- Calipers
- Disc Brake Pads
- Drum Brake Systems
- Grommets
- Parking Brake Areas of Lubrication
- Pivot Points
- Self Adjusters

4 Ball Wear 0.6 mm

Brand Sta-Lube

DOT Proper Shipping Name Not Regulated

Elastomer Compatibility EPDM

Flammability Class - CPSC None

Flash point (F) 500°F

I 2 of 5 Code 30072213330107

Leakage None

Net Fill 2.5 Wt Oz

Pour Point (C) -29°C

Propellant None

Specific Gravity 0.89

UPC Code 072213330106

Unit Package Description 2.5 Ounce Tube

VOC % (Consumer Product def) 0.58

VOC Category Not Regulated

VOC g/L (Consumer Product def) 5.62

VOC lbs/gal (Consumer Prod def) 0.04

Worked Penetration 265 to 295

Working Temp (F) -40 to 495°F

Appearance Black Semi-Solid Grease

Case# 1007897

Drop Point None

Evaporation Rate Slow

Flash point (C) 260°C

Generic Description Brake Caliper Synthetic Grease

Item Number SL3301

NLGI Grade 2

Pour Point -20°F

Pour Point (F) -40°F

Removal (How To) Remove with a degreaser or brake cleaner product.

Timken OK Load [Lbs.] 60 Lbs

Unit Dimensions 6.19H x 2W x 1.5D in

Units per Case 6

VOC % (Federal) 0.58

VOC Lbs./Gal. (Federal) 0.08

VOC g/L (Federal) 9

Water Washout 1.68

Working Temp (C) -40 to 257°C



Part No. SL3303

Item# 1007902

# Sta-Lube® Synthetic Brake & Caliper Grease, 12 Wt Oz

## Description

Sta-Lube® Synthetic Brake & Caliper Grease is a uniquely formulated synthetic grease, designed specifically for disc and brake systems. It's the ideal solution to ensure the smooth operation of the brake system and its components. Sta-Lube® is rubber safe, plastic safe, moisture resistant, and formulated for use at high temperatures. Use it on metal-to-metal contact points, as well as on sliding surfaces. Here are a few reasons why professionals and DIY-ers trust Sta-Lube®.

## Applications

- Backing Plates
- Caliper O-Rings
- Disc Brake Pads
- Grommets
- Pivot Points
- Brake Pad Contact Points
- Calipers
- Drum Brake Systems
- Parking Brake Areas of Lubrication
- Self Adjusters



4 Ball Wear 0.6 mm

Brand Sta-Lube

DOT Proper Shipping Name Not Regulated

Elastomer Compatibility EPDM

Flammability Class - CPSC None

Flash point (F) 500°F

I 2 of 5 Code 30072213330305

Leakage None

Net Fill 12 Wt Oz

Pour Point (C) -29°C

Propellant None

Specific Gravity 0.89

UPC Code 072213330304

Unit Package Description 12 Ounce Tub With Brush

VOC % (Consumer Product def) 0.58

VOC Category Not Regulated

VOC g/L (Consumer Product def) 5.62

VOC lbs/gal (Consumer Prod def) 0.04

Worked Penetration 265 to 295

Working Temp (F) -40 to 495°F

Appearance Black Semi-Solid Grease

Case# 1007901

Drop Point None

Evaporation Rate Slow

Flash point (C) 260°C

Generic Description Brake Caliper Synthetic Grease

Item Number SL3303

NLGI Grade 2

Pour Point -20°F

Pour Point (F) -40°F

Removal (How To) Remove with a degreaser or brake cleaner product.

Timken OK Load [Lbs.] 60 Lbs

Unit Dimensions 4.25H x 4W x 4D in

Units per Case 12

VOC % (Federal) 0.58

VOC Lbs./Gal. (Federal) 0.08

VOC g/L (Federal) 9

Water Washout 1.68

Working Temp (C) -40 to 257°C



Part No. SL3131

Item# 1007862

# Sta-Lube® Heavy Duty Drum Brake Wheel Bearing Grease, 14 Wt Oz

## Discontinued

Discontinued product number may still be available for a limited time through your local supplier or retailer.

### Description

A sodium-based short fiber grease for autos & trucks with drum brake systems and slow speed industrial bearings. Meets most demands for economical wheel bearing lubrication. Good adhesive characteristics.

### Applications

- Drum Brake Systems
- For Use Where Heavy Loads & Slow Speeds Are Present

Appearance \_\_\_\_\_ Dark Amber Semi-Solid to Solid Grease

Case# \_\_\_\_\_ 1007861

Drop Point \_\_\_\_\_ 360°F

Flammability Class - CPSC \_\_\_\_\_ None

Flash point (F) \_\_\_\_\_ 428°F

I 2 of 5 Code \_\_\_\_\_ 30072213313100

Item Number \_\_\_\_\_ SL3131

Net Fill \_\_\_\_\_ 14 Wt Oz

Pour Point \_\_\_\_\_ 10.4°F

Pour Point (F) \_\_\_\_\_ 10.4°F

Propellant \_\_\_\_\_ None

Specific Gravity \_\_\_\_\_ 0.9 at 60°F

Unit Dimensions \_\_\_\_\_ 3.44H x 4.13W x 4.13D in

Units per Case \_\_\_\_\_ 12

VOC Category \_\_\_\_\_ Not Regulated

VOC lbs/gal (Consumer Prod def) \_\_\_\_\_ 0

Working Temp (C) \_\_\_\_\_ -12.2 to 121.1°C

Brand \_\_\_\_\_ Sta-Lube

DOT Proper Shipping Name \_\_\_\_\_ Not Regulated

Evaporation Rate \_\_\_\_\_ <0.01 (Butyl Acetate=1)

Flash point (C) \_\_\_\_\_ 220°C

Generic Description \_\_\_\_\_ HD Drum Brake Wheel Bearing Grease

ISO Viscosity Grade \_\_\_\_\_ 190

NLGI Grade \_\_\_\_\_ 2.5

Oil Separation \_\_\_\_\_ <10

Pour Point (C) \_\_\_\_\_ -17.78°C

Product Lifecycle Status \_\_\_\_\_ DISC

Removal (How To) \_\_\_\_\_ Remove with a degreaser or brake cleaner product.

UPC Code \_\_\_\_\_ 072213313109

Unit Package Description \_\_\_\_\_ 14 Ounce Can

VOC % (Consumer Product def) \_\_\_\_\_ 0

VOC g/L (Consumer Product def) \_\_\_\_\_ 0

Worked Penetration \_\_\_\_\_ 235 to 265

Working Temp (F) \_\_\_\_\_ 10 to 250°F

---



Part No. 05351

Item# 1003785

# CRC® Brake Caliper Synthetic Grease, 2.5 Wt Oz

## Discontinued

alternate available Product No. 05353 **ITEM# 1003789**

Discontinued product number may still be available for a limited time through your local supplier or retailer.

### Description

A specially developed synthetic grease with a high-tech formula for use in disc & drum brake systems. High temperature grease is plastic & rubber safe. Use on metal to metal contact points and sliding surfaces. Resists moisture and will not washout.

### Applications

- Backing Plates
- Caliper O-Rings
- Disc Brake Pads
- Grommets
- Pivot Points
- Brake Pad Contact Points
- Calipers
- Drum Brake Systems
- Parking Brake Areas of Lubrication
- Self Adjusters

4 Ball Wear 0.6 mm

Brand CRC

Color None

Drop Point None

Flammability Class - CPSC None

Flash point (F) 500°F

I 2 of 5 Code 30078254053517

Leakage None

Net Fill 2.5 Wt Oz

Pour Point (C) -29°C

Product Lifecycle Status DISC

Removal (How To) Remove with a degreaser or  
brake cleaner product.

Replacement Product SKU 1003789

Timken OK Load [Lbs.] 60 Lbs

Unit Dimensions 6.19H x 2W x 1.5D in

Units per Case 6

VOC % (Federal) 0.58

VOC Lbs./Gal. (Federal) 0.08

VOC g/L (Federal) 9

Water Washout 1.68

Working Temp (C) -40 to 257°C

Appearance Black Semi-Solid Grease

Case# 1003784

DOT Proper Shipping Name Not Regulated

Evaporation Rate Slow

Flash point (C) 260°C

Generic Description Brake Caliper Synthetic Grease

Item Number 05351

NLGI Grade 2

Pour Point -20°F

Pour Point (F) -40°F

Propellant None

Replacement Legacy Num 05353

Specific Gravity 0.89

UPC Code 078254053516

Unit Package Description 2.5 Ounce Tube

VOC % (Consumer Product def) 0.58

VOC Category Not Regulated

VOC g/L (Consumer Product  
def) 5.62

VOC lbs/gal (Consumer Prod  
def) 0.04

Worked Penetration 265 to 295

Working Temp (F) -40 to 495°F



Part No. 05353

Item# 1003789

# CRC® Brake Caliper Synthetic Grease, 12 Wt Oz

## Description

A specially developed synthetic grease with a high-tech formula for use in disc & drum brake systems. High temperature grease is plastic & rubber safe. Use on metal to metal contact points and sliding surfaces. Resists moisture and will not washout.

## Applications

- Backing Plates
- Caliper O-Rings
- Disc Brake Pads
- Grommets
- Pivot Points
- Brake Pad Contact Points
- Calipers
- Drum Brake Systems
- Parking Brake Areas of Lubrication
- Self Adjusters

4 Ball Wear 0.6 mm

Brand CRC

Color None

Drop Point None

Flammability Class - CPSC None

Flash point (F) 500°F

I 2 of 5 Code 30078254053531

Leakage None

Net Fill 12 Wt Oz

Pour Point (C) -29°C

Propellant None

Specific Gravity 0.89

UPC Code 078254053530

Unit Package Description 12 Ounce Tub With Brush

VOC % (Consumer Product def) 0

VOC Category Not Regulated

VOC g/L (Consumer Product def) 5.62

VOC lbs/gal (Consumer Prod def) 0.04

Worked Penetration 265 to 295

Working Temp (F) -40 to 495°F

Appearance Black Semi-Solid Grease

Case# 1003788

DOT Proper Shipping Name Not Regulated

Evaporation Rate Slow

Flash point (C) 260°C

Generic Description Brake Caliper Synthetic Grease

Item Number 05353

NLGI Grade 2

Pour Point -20°F

Pour Point (F) -40°F

Removal (How To) Remove with a degreaser or brake cleaner product.

Timken OK Load [Lbs.] 60 Lbs

Unit Dimensions 4.25H x 4W x 4D in

Units per Case 12

VOC % (Federal) 0.58

VOC Lbs./Gal. (Federal) 0.08

VOC g/L (Federal) 9

Water Washout 1.68

Working Temp (C) -40 to 257°C



Part No. SL3160

Item# 1007879

# Sta-Lube® Hi Temperature Disc Brake Wheel Bearing Grease, 14 Wt Oz

## Discontinued

Discontinued product number may still be available for a limited time through your local supplier or retailer.

### Description

A very stable resistant Aluminum Complex grease. Contains rust & oxidation inhibitors, anti-wear and extreme pressure additives & fortified with "moly" and graphite. For use in automotive disc/drum brakes, chassis and suspension systems

### Applications

- Automotive Applications
- Bearings
- Construction Ball & Roller Bearings
- Disc-Brake Systems
- Guides
- Press Rolls
- Slides
- Ball Joints
- ChassisPoints
- Conveyor Bearings
- Farm Equipment
- Mining Applications
- Roller Bearings
- Wheel Bearings



4 Ball EP 30 LWI,315 Kg Weld

Appearance Dark Gray Semi-Solid to Solid Grease

Case# 1007878

Drop Point 500°F

Evaporation Rate <0.01 (Butyl Acetate=1)

Flash point (C) >232°C

Generic Description Hi-Temp Disc Brake Wheel Grease

ISO Viscosity Grade 205

Leakage 10g Max

Net Fill 14 Wt Oz

Pour Point 0°F

Pour Point (F) 0°F

Propellant None

Specific Gravity 0.9 at 60°F

UPC Code 072213316001

Unit Package Description 14 Ounce Cartridge

VOC % (Consumer Product def) 0.4

VOC g/L (Consumer Product def) 3.6

Water Washout <15%

Working Temp (C) -18 to 162.5°C

4 Ball Wear 0.75 mm

Brand Sta-Lube

DOT Proper Shipping Name Not Regulated

Elastomer Compatibility 0 to 30% vol; 0 to 15 hard

Flammability Class - CPSC None

Flash point (F) >450°F

I 2 of 5 Code 30072213316002

Item Number SL3160

NLGI Grade 2

Oil Separation <10%

Pour Point (C) -17.78°C

Product Lifecycle Status DISC

Removal (How To) Remove with a degreaser or brake cleaner product.

Timken OK Load [Lbs.] 60 Lbs

Unit Dimensions 9.31H x 2.13W x 2.13D in

Units per Case 10

VOC Category Not Regulated

VOC lbs/gal (Consumer Prod def) 0.03

Worked Penetration 265 to 295

Working Temp (F) 0 to 325°F



Part No. 05532

Item# 1003822

# CRC® Air Brake Anti Freeze, 32 Fl Oz

## Description

Keeping up with the winter care of your vehicle and brake system is critical. You can't afford to skip this important maintenance when the cold weather hits. CRC Air Brake Anti-Freeze is a specially formulated additive for air-brake systems. It provides complete protection by preventing damaging moisture accumulation and ice buildup in your brake system. Run smoothly all season long with CRC Air Brake Anti-Freeze.

## Applications

- For Use in All Air-Brake Systems

Appearance \_\_\_\_\_ Colorless Liquid

Brand \_\_\_\_\_ CRC

Case# \_\_\_\_\_ 1003821

Color \_\_\_\_\_ None

DOT Proper Shipping Name \_\_\_\_\_ Methanol, Limited Quantity

Evaporation Rate \_\_\_\_\_ Fast

Flammability Class - CPSC \_\_\_\_\_ Flammable

Flash point (C) \_\_\_\_\_ 12.2°C

Flash point (F) \_\_\_\_\_ 54°F

Ford Tox No. \_\_\_\_\_ 198314

Generic Description \_\_\_\_\_ Premium Air Brake Anti Freeze

I 2 of 5 Code \_\_\_\_\_ 30078254055320

Item Number \_\_\_\_\_ 05532

Net Fill \_\_\_\_\_ 32 Fl Oz

Plastic Safe \_\_\_\_\_ Yes

Propellant \_\_\_\_\_ None

Specific Gravity \_\_\_\_\_ 0.79

UPC Code \_\_\_\_\_ 078254055329

Unit Dimensions \_\_\_\_\_ 8.5H x 3.13W x 4.13D in

Unit Package Description \_\_\_\_\_ 1 Quart Can

Units per Case \_\_\_\_\_ 12

VOC % (Consumer Product def) \_\_\_\_\_ 100

VOC % (Federal) \_\_\_\_\_ 100

VOC Category \_\_\_\_\_ Not Regulated

VOC Lbs./Gal. (Federal) \_\_\_\_\_ 12.9

VOC g/L (Consumer Product def) \_\_\_\_\_ 792

VOC g/L (Federal) \_\_\_\_\_ 1550.6

VOC lbs/gal (Consumer Prod def) \_\_\_\_\_ 6.6

---



Part No. 05361

Item# 1003793

# CRC® Silaramic® Brake System Grease, 5 Wt Oz

## Description

A synthetic, dry-film, ceramic lubricant formulated to reduce brake noise and vibrations by dampening all brake vibrating frequencies. Will not run off or wash out. Works in extreme temp ranges from -50 to 3000°F. Protects against uneven pad wear.

## Applications

- All Brake Systems and Brake Components
- Bushings
- Pins
- Anchors
- Calipers and Boots
- Including Calipers
- Holes
- Inserts
- Bolts

Appearance \_\_\_\_\_ Off White Semi Solid Grease

Brand \_\_\_\_\_ CRC

Case# \_\_\_\_\_ 1003792

Color \_\_\_\_\_ None

DOT Proper Shipping Name \_\_\_\_\_ Not Regulated

Drop Point \_\_\_\_\_ None

Elastomer Compatibility \_\_\_\_\_ Compatible

Evaporation Rate \_\_\_\_\_ Very Slow

Film Type \_\_\_\_\_ Grease

Flammability Class - CPSC \_\_\_\_\_ None

Flash point (C) \_\_\_\_\_ 288°C

Flash point (F) \_\_\_\_\_ 550°F

Generic Description \_\_\_\_\_ Brake System Grease

I 2 of 5 Code \_\_\_\_\_ 30078254053616

Item Number \_\_\_\_\_ 05361

Leakage \_\_\_\_\_ Not Determined

NLGI Grade \_\_\_\_\_ 2

Net Fill \_\_\_\_\_ 5 Wt Oz

Oil Separation \_\_\_\_\_ 0.2

Plastic Safe \_\_\_\_\_ Yes

Pour Point \_\_\_\_\_ Not Determined

Propellant \_\_\_\_\_ None

Removal (How To) \_\_\_\_\_ Remove with brake parts cleaner

Specific Gravity \_\_\_\_\_ 1

UPC Code \_\_\_\_\_ 078254053615

Unit Dimensions \_\_\_\_\_ 6.25H x 2W x 2D in

Unit Package Description \_\_\_\_\_ 5 Ounce Tube

Units per Case \_\_\_\_\_ 12

VOC % (Consumer Product def) \_\_\_\_\_ < 0.3%

VOC % (Federal) \_\_\_\_\_ > 80.3%

VOC Category \_\_\_\_\_ Not Regulated

VOC g/L (Consumer Product def) \_\_\_\_\_ Not Determined

Viscosity @68 F [cP] \_\_\_\_\_ Not Determined

Water Washout \_\_\_\_\_ 0.25

Worked Penetration \_\_\_\_\_ 265 to 295

Working Temp (C) \_\_\_\_\_ -45.6 to 1649°C

Working Temp (F) \_\_\_\_\_ -50 to 3000°F

---



Part No. 05363

Item# 1003796

# CRC® Silaramic® Brake System Grease, 9 Wt Oz

## Discontinued

alternate available Product No. 05361 ITEM# 1003793

Discontinued product number may still be available for a limited time through your local supplier or retailer.

### Description

A synthetic, dry-film, ceramic lubricant formulated to reduce brake noise and vibrations by dampening all brake vibrating frequencies. Will not run off or wash out. Works in extreme temp ranges from -50 to 3000°F. Protects against uneven pad wear.

### Applications

- All Brake Systems and Brake Components
- Bushings
- Pins
- Anchors
- Calipers and Boots
- Including Calipers
- Holes
- Inserts
- Bolts

Appearance Off White Semi Solid Grease

Brand CRC

Case# 1003795

Color None

DOT Proper Shipping Name Not Regulated

Drop Point None

Elastomer Compatibility Compatible

Evaporation Rate Very Slow

Film Type Grease

Flammability Class - CPSC None

Flash point (C) 288°C

Flash point (F) 550°F

Generic Description Brake System Grease

I 2 of 5 Code 30078254053630

Item Number 05363

NLGI Grade 2

Net Fill 9 Wt Oz

Oil Separation 0.2

Plastic Safe Yes

Pour Point Not Determined

Product Lifecycle Status DISC

Propellant None

Removal (How To) Remove with brake parts cleaner

Replacement Legacy Num 05361

Replacement Product SKU 1003793

Restricted From Sale In No state restrictions

Specific Gravity 1

UPC Code 078254053639

Unit Dimensions 4.25H x 3.88W x 3.88D in

Unit Package Description 9 Ounce Tub with Brush

Units per Case 12

VOC % (Consumer Product def) 0

VOC Category Not Regulated

VOC g/L (Consumer Product def) 0

VOC lbs/gal (Consumer Prod def) 0


Water Washout 0.25

Worked Penetration 265 to 295

Working Temp (C) -45.6 to 1649°C

Working Temp (F) -50 to 3000°F

---

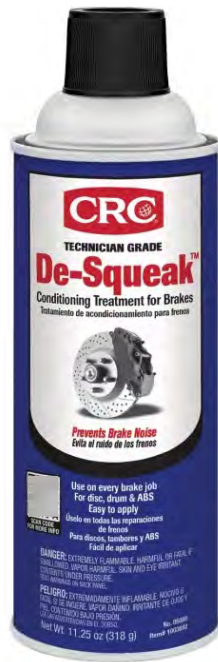

Part No. 05080

Item# 1003692

# CRC® De-Squeak™ Conditioning Treatment for Brakes, 11.25 Wt Oz

## Description

Prevents brake noises before they occur. Metallic-bonding formula fills grooves and imperfections in the friction surface that commonly cause squeaks & squeals.

## Applications

- New
- Old or Freshly Cut (Turned) Brake Rotors and Drums Safe For Use on All Types of Brake Systems
- Including ABS



Appearance \_\_\_\_\_ Gray Film

Brand \_\_\_\_\_ CRC

Case# \_\_\_\_\_ 1003691

Color \_\_\_\_\_ None

DOT Proper Shipping Name \_\_\_\_\_  
AEROSOLS, FLAMMABLE  
LIMITED QUANTITY

Evaporation Rate \_\_\_\_\_ Not Determined

Film Type \_\_\_\_\_ Thin Dry

Flammability Class - CPSC \_\_\_\_\_ Extremely Flammable

Flash point (C) \_\_\_\_\_ -104°C

Flash point (F) \_\_\_\_\_ -155°F

Generic Description \_\_\_\_\_ De-Squeak Brake Conditioning  
Treatment

I 2 of 5 Code \_\_\_\_\_ 30078254050806

Item Number \_\_\_\_\_ 05080

Net Fill \_\_\_\_\_ 11.25 Wt Oz

Propellant \_\_\_\_\_ Hydrocarbon

Removal (How To) \_\_\_\_\_ Remove with a degreaser or brake  
cleaner product.

Specific Gravity \_\_\_\_\_ 0.62

UPC Code \_\_\_\_\_ 078254050805

Unit Dimensions \_\_\_\_\_ 9.8H x 2.63W X 2.63D in

Unit Package Description \_\_\_\_\_ 16 Ounce Aerosol

Units per Case \_\_\_\_\_ 6

VOC Category \_\_\_\_\_ Not Regulated

Working Temp (C) \_\_\_\_\_ -23.3 to 982.2°C

Working Temp (F) \_\_\_\_\_ -10 to 1800°F

---



Part No. 05016

Item# 1003630

## CRC® Disc Brake Quiet, 4 Wt Oz

### Description

Disc Brake Quiet forms a water resistant, high-temperature film that absorbs noise while quieting squeaks & squeals. Specially formulated to dampen the vibrations that cause brake noise. For use on the back of non-shimmed disc pads.

### Applications

- Backing Plates
- Brake Pad Contact Points
- Disc Brake Pads

Appearance \_\_\_\_\_ Red Paste

Brand \_\_\_\_\_ CRC

Case# \_\_\_\_\_ 1003629

Color \_\_\_\_\_ None

DOT Proper Shipping Name \_\_\_\_\_ Not Regulated

Evaporation Rate \_\_\_\_\_ Slow

Film Type \_\_\_\_\_ Dry

Flammability Class - CPSC \_\_\_\_\_ None

Flash point (C) \_\_\_\_\_ None

Flash point (F) \_\_\_\_\_ None

Ford Tox No. \_\_\_\_\_ 198808

Generic Description \_\_\_\_\_ Disc Brake Quiet

I 2 of 5 Code \_\_\_\_\_ 30078254050165

Item Number \_\_\_\_\_ 05016

Net Fill \_\_\_\_\_ 4 Fl Oz

Propellant \_\_\_\_\_ None

Removal (How To) \_\_\_\_\_ Remove with a degreaser or  
brake cleaner product.

Specific Gravity \_\_\_\_\_ 1.025 to 1.049

UPC Code \_\_\_\_\_ 078254050164

Unit Dimensions \_\_\_\_\_ 5.75H x 1.63W x 1.63D in

Unit Package Description \_\_\_\_\_ 4 Ounce Bottle

Units per Case \_\_\_\_\_ 12

VOC % (Consumer Product def) \_\_\_\_\_ 0.7

VOC % (Federal) \_\_\_\_\_ 3.98

VOC Category \_\_\_\_\_ Not Regulated

VOC Lbs./Gal. (Federal) \_\_\_\_\_ 0.52

VOC g/L (Consumer Product def) \_\_\_\_\_ 7.29

VOC g/L (Federal) \_\_\_\_\_ 61.7

VOC lbs/gal (Consumer Prod def) \_\_\_\_\_ 0.06

---



Part No. SL3192

Item# 1007894

# Sta-Lube® Sta-Plex Premium Red Grease, 11 Wt Oz

## Discontinued

Discontinued product number may still be available for a limited time through your local supplier or retailer.

### Description

Premium red grease with heavy-duty lubricant that withstands high temperature and high pressure. Red color allows for easy visual inspection of film coverage.

### Applications

- Use on All Types of High Temperature
- Ball & Roller Bearings
- Trucks
- Buses
- Off-Road Operations
- Mowers
- Machining
- Striker Plates
- Cables
- Linkages
- Couplings
- Slides and More
- Performance and Heavy Load Applications Electric Motors
- Industrial Bearings
- Automobiles
- Construction Equipment
- Tractors
- Metal Production
- Assembly Plants
- Chains
- Tools
- Conveyors
- Shovels

4 Ball EP 315

Appearance Red Viscous Grease

Case# 1007893

Drop Point 500°F

Film Type Grease

Flash point (C) <-5°C

Generic Description Premium Red Grease

ISO Viscosity Grade Not Determined

Leakage 5

NLGI Grade 2

Plastic Safe Yes

Pour Point (C) -17.78°C

Product Lifecycle Status DISC

Removal (How To) Remove with petroleum distillates.

Specific Gravity 0.72

UPC Code 072213319200

Unit Package Description 16 Ounce Aerosol

VOC % (Consumer Product def) 63

VOC Category Multi-Purpose Lubricant

VOC g/L (Consumer Product def) 453.6

VOC lbs/gal (Consumer Prod def) 3.78

Worked Penetration 265 to 295

Working Temp (F) -25 to 300°F

4 Ball Wear 0.6 mm

Brand Sta-Lube

DOT Proper Shipping Name Aerosols, Flammable, Limited Quantity

Evaporation Rate Fast

Flammability Class - CPSC Extremely Flammable

Flash point (F) <23°F

I 2 of 5 Code 30072213319201

Item Number SL3192

MIR Limit (CA) 0.45

Net Fill 11 Wt Oz

Pour Point 0°F

Pour Point (F) 0°F

Propellant Hydrocarbon

Restricted From Sale In None

Timken OK Load [Lbs.] 45

Unit Dimensions 7.75H x 2.63W x 2.63D in

Units per Case 12

VOC % (Federal) 24.9

VOC Lbs./Gal. (Federal) 1.63

VOC g/L (Federal) 196

Water Washout Nil

Working Temp (C) -31.7 to 148.9A°C



Part No. SL3191

Item# 1007892

# Sta-Lube® Sta-Plex™ Extreme Pressure Premium Red Grease, 14 Wt Oz

## Description

A superior multi-purpose certified lithium complex based NLGI #2 grease. Contains extreme pressure, anti-wear, & anti-oxidation additives. Ideal for high temperature & performance applications. Drop point 500°F

## Applications

- Ind Mining
- Machining
- Pumps
- Ball & Roller Bearings
- Assembly Plants
- Trucks
- Buses
- Off-Road Operations
- Reapers
- Metal Production
- Plastic Molding
- Electric Motors
- Kilns
- Drying Ovens
- Automobiles
- Construction Equipment
- Tractors Mowers
- Water Pumps

4 Ball EP \_\_\_\_\_ 315 kg Weld,50 LWI

Appearance \_\_\_\_\_ Red Semi-Solid to Solid Grease

Case# \_\_\_\_\_ 1007891

Dielectric Strength \_\_\_\_\_ Not Determined

Elastomer Compatibility \_\_\_\_\_ N/A

Flammability Class - CPSC \_\_\_\_\_ None

Flash point (F) \_\_\_\_\_ 302°F

Generic Description \_\_\_\_\_ Premium Red Grease

ISO Viscosity Grade \_\_\_\_\_ N/A

Leakage \_\_\_\_\_ 10g Max

Low Temp Torque \_\_\_\_\_ 13.0 Nm

NSF Category Code \_\_\_\_\_ H2

Net Fill \_\_\_\_\_ 14 Wt Oz

Pour Point \_\_\_\_\_ 5°F

Pour Point (F) \_\_\_\_\_ Not Determined

Recoat \_\_\_\_\_ N/A

Specific Gravity \_\_\_\_\_ 0.9 at 60°F

Treatment Ratio \_\_\_\_\_ N/A

Unit Dimensions \_\_\_\_\_ 3.44H x 4.13W x 4.13D in

Units per Case \_\_\_\_\_ 12

VOC Category \_\_\_\_\_ Not Regulated

VOC lbs/gal (Consumer Prod def) \_\_\_\_\_ 0.075

Water Washout \_\_\_\_\_ 4.10%

Working Temp (C) \_\_\_\_\_ -23 to 163°C

4 Ball Wear \_\_\_\_\_ 0.54 mm

Brand \_\_\_\_\_ Sta-Lube

DOT Proper Shipping Name \_\_\_\_\_ NOT REGULATED

Drop Point \_\_\_\_\_ 500+°F

Evaporation Rate \_\_\_\_\_ <1 (Butyl Acetate=1)

Flash point (C) \_\_\_\_\_ 150°C

Gap Fill \_\_\_\_\_ N/A

I 2 of 5 Code \_\_\_\_\_ 30072213319102

Item Number \_\_\_\_\_ SL3191

Locking Strength \_\_\_\_\_ N/A

NLGI Grade \_\_\_\_\_ 2

NSF Number \_\_\_\_\_ 145511

Oil Separation \_\_\_\_\_ 1.20%

Pour Point (C) \_\_\_\_\_ Not Determined

Propellant \_\_\_\_\_ None

Removal (How To) \_\_\_\_\_ Remove with a degreaser or brake cleaner product.

Timken OK Load [Lbs.] \_\_\_\_\_ 60 Lbs Min

UPC Code \_\_\_\_\_ 072213319101

Unit Package Description \_\_\_\_\_ 14 Ounce Can

VOC % (Consumer Product def) \_\_\_\_\_ 1

VOC g/L (Consumer Product def) \_\_\_\_\_ 9

Viscosity @68 F [cP] \_\_\_\_\_ Not Determined

Worked Penetration \_\_\_\_\_ 265 to 295

Working Temp (F) \_\_\_\_\_ -10 to 325°F



Part No. SL3190

Item# 1007890

# Sta-Lube® Sta-Plex™ Extreme Pressure Premium Red Grease, 14 wt OZ

## Description

From the CRC family of products comes another industry leading solution. Sta-Lube® Sta-Plex® Extreme Pressure Premium Red Grease is a multi-purpose, red lithium complex grease that withstands extreme pressures and temperature ranges. Formulated with anti-oxidation, anti-rust, and anti-wear additives, it is a highly versatile grease for use in both automotive and industrial settings.

## Applications

- Ind Mining
- Machining
- Pumps
- Ball & Roller Bearings
- Assembly Plants
- Trucks
- Buses
- Off-Road Operations
- Reapers
- Metal Production
- Plastic Molding
- Electric Motors
- Kilns
- Drying Ovens
- Automobiles
- Construction Equipment
- Tractors Mowers
- Water Pumps



4 Ball EP \_\_\_\_\_ 315 kg Weld,50 LWI

Appearance \_\_\_\_\_ Red Semi-Solid to Solid Grease

Case# \_\_\_\_\_ 1007889

Drop Point \_\_\_\_\_ 500+°F

Film Type \_\_\_\_\_ N/A

Flash point (C) \_\_\_\_\_ 150°C

Ford Tox No. \_\_\_\_\_ N/A

I 2 of 5 Code \_\_\_\_\_ 30072213319003

Leakage \_\_\_\_\_ 10g Max

NLGI Grade \_\_\_\_\_ 2

NSF Number \_\_\_\_\_ 145511

Oil Separation \_\_\_\_\_ 0.012

Propellant \_\_\_\_\_ None

Restricted From Sale In \_\_\_\_\_ N/A

Timken OK Load [Lbs.] \_\_\_\_\_ 60 Lbs Min

Unit Dimensions \_\_\_\_\_ 9.31H x 2.13W x 2.13D in

Units per Case \_\_\_\_\_ 10

VOC % (Federal) \_\_\_\_\_ 0

VOC g/L (Consumer Product def) \_\_\_\_\_ 0

VOC lbs/gal (Consumer Prod def) \_\_\_\_\_ 0

Worked Penetration \_\_\_\_\_ 265 to 295

Working Temp (F) \_\_\_\_\_ -10 to 325°F

4 Ball Wear \_\_\_\_\_ 0.54 mm

Brand \_\_\_\_\_ Sta-Lube

DOT Proper Shipping Name \_\_\_\_\_ NOT REGULATED

Evaporation Rate \_\_\_\_\_ <1 (butyl acetate=1)

Flammability Class - CPSC \_\_\_\_\_ None

Flash point (F) \_\_\_\_\_ 302°F

Generic Description \_\_\_\_\_ Premium Red Grease

Item Number \_\_\_\_\_ SL3190

Low Temp Torque \_\_\_\_\_ 13.0 Nm

NSF Category Code \_\_\_\_\_ H2

Net Fill \_\_\_\_\_ 14 Wt Oz

Pour Point \_\_\_\_\_ 5°F

Removal (How To) \_\_\_\_\_ Remove with a degreaser or brake cleaner product.

Specific Gravity \_\_\_\_\_ 0.9 at 60°F

UPC Code \_\_\_\_\_ 072213319002

Unit Package Description \_\_\_\_\_ 14 Ounce Cartridge

VOC % (Consumer Product def) \_\_\_\_\_ 0

VOC Category \_\_\_\_\_ Not Regulated

VOC g/L (Federal) \_\_\_\_\_ 0

Water Washout \_\_\_\_\_ 0.041

Working Temp (C) \_\_\_\_\_ -23 to 163°C

---



Part No. SL3161

Item# 1007881

# Sta-Lube® Hi Temperature Disc Brake Wheel Bearing Grease, 14 Wt Oz

## Discontinued

Discontinued product number may still be available for a limited time through your local supplier or retailer.

### Description

A very stable resistant Aluminum Complex grease. Contains rust & oxidation inhibitors, anti-wear and extreme pressure additives & fortified with "moly" and graphite. For use in automotive disc/drum brakes, chassis and suspension systems

### Applications

- Automotive Applications
- Bearings
- Construction Ball & Roller Bearings
- Disc-Brake Systems
- Guides
- Press Rolls
- Slides
- Ball Joints
- ChassisPoints
- Conveyor Bearings
- Farm Equipment
- Mining Applications
- Roller Bearings
- Wheel Bearings

4 Ball EP 30 LWI,315 Kg Weld

Appearance Dark Gray Semi-Solid to Solid Grease

Case# 1007880

Drop Point 500°F

Evaporation Rate <0.01 (Butyl Acetate=1)

Flash point (C) >232°C

Generic Description Hi-Temp Disc Brake Wheel Grease

ISO Viscosity Grade 205

Leakage 10g Max

Net Fill 14 Wt Oz

Pour Point 0°F

Pour Point (F) 0°F

Propellant None

Specific Gravity 0.9 at 60°F

UPC Code 072213316100

Unit Package Description 14 Ounce Can

VOC % (Consumer Product def) 0.4

VOC g/L (Consumer Product def) 3.6

Water Washout <15%

Working Temp (C) -18 to 162.5°C

4 Ball Wear 0.75 mm

Brand Sta-Lube

DOT Proper Shipping Name Not Regulated

Elastomer Compatibility 0 to 30% vol; 0 to 15 hard

Flammability Class - CPSC None

Flash point (F) >450°F

I 2 of 5 Code 30072213316101

Item Number SL3161

NLGI Grade 2

Oil Separation <10%

Pour Point (C) -17.78°C

Product Lifecycle Status DISC

Removal (How To) Remove with a degreaser or brake cleaner product.

Timken OK Load [Lbs.] 60 Lbs

Unit Dimensions 3.44H x 4.13W x 4.13D in

Units per Case 12

VOC Category Not Regulated

VOC lbs/gal (Consumer Prod def) 0.03

Worked Penetration 265 to 295

Working Temp (F) 0 to 325°F



Part No. SL3136

Item# 1007864

# Sta-Lube® Heavy Duty Drum Brake Wheel Bearing Grease, 7 Lbs

## Discontinued

Discontinued product number may still be available for a limited time through your local supplier or retailer.

### Description

A sodium-based short fiber grease for autos & trucks with drum brake systems and slow speed industrial bearings. Meets demands for most economical wheel bearing lubrication. Good adhesive characteristics.

### Applications

- Drum Brake Systems
- For Use Where Heavy Loads & Slow Speeds Are Present

Appearance \_\_\_\_\_ Dark Amber Semi-Solid to Solid Grease

Case# \_\_\_\_\_ 1007863

Drop Point \_\_\_\_\_ 360°F

Flammability Class - CPSC \_\_\_\_\_ None

Flash point (F) \_\_\_\_\_ 428°F

I 2 of 5 Code \_\_\_\_\_ 30072213313605

Item Number \_\_\_\_\_ SL3136

Net Fill \_\_\_\_\_ 7 Liter

Pour Point \_\_\_\_\_ 10.4°F

Pour Point (F) \_\_\_\_\_ 10.4°F

Propellant \_\_\_\_\_ None

Specific Gravity \_\_\_\_\_ 0.9 at 60°F

Unit Dimensions \_\_\_\_\_ 7.75H x 7.5W x 7.5D in

Units per Case \_\_\_\_\_ 4

VOC Category \_\_\_\_\_ Not Regulated

VOC lbs/gal (Consumer Prod def) \_\_\_\_\_ 0

Working Temp (C) \_\_\_\_\_ -12.2 to 121.1°C

Brand \_\_\_\_\_ Sta-Lube

DOT Proper Shipping Name \_\_\_\_\_ Not Regulated

Evaporation Rate \_\_\_\_\_ <0.01 (Butyl Acetate=1)

Flash point (C) \_\_\_\_\_ 220°C

Generic Description \_\_\_\_\_ HD Drum Brake Wheel Bearing Grease

ISO Viscosity Grade \_\_\_\_\_ 190

NLGI Grade \_\_\_\_\_ 2.5

Oil Separation \_\_\_\_\_ <10

Pour Point (C) \_\_\_\_\_ -17.78°C

Product Lifecycle Status \_\_\_\_\_ DISC

Removal (How To) \_\_\_\_\_ Remove with a degreaser or brake cleaner product.

UPC Code \_\_\_\_\_ 072213313604

Unit Package Description \_\_\_\_\_ 7 Pound Pail

VOC % (Consumer Product def) \_\_\_\_\_ 0

VOC g/L (Consumer Product def) \_\_\_\_\_ 0

Worked Penetration \_\_\_\_\_ 235 to 265

Working Temp (F) \_\_\_\_\_ 10 to 250°F

---



Part No. 05090

Item# 1003713

# CRC® Brakleen® Brake Parts Cleaner, 1 Gal

## Description

The original brake parts cleaner. Formulated to quickly & effectively remove grease, brake dust, brake fluids, oils, & other contaminants from brake parts, lining, pads.

## Applications

Safe For Use on All Brake Systems Including:

- ABS
- Drum
- Brake Drums
- Brake Shoes
- Clutch Discs
- Discs
- Disc
- Brake Cylinders
- Brake Linings
- Calipers
- Disc Brake Pads
- Springs & Wedge Brakes

Appearance \_\_\_\_\_ Colorless Liquid

Brand \_\_\_\_\_ CRC

Case# \_\_\_\_\_ 1003712

Color \_\_\_\_\_ None

DOT Proper Shipping Name \_\_\_\_\_ Tetrachloroethylene, Limited  
Quantity (Marine Pollutant)

Dielectric Strength \_\_\_\_\_ 37,500 Volts

Dry Time Fully Dry \_\_\_\_\_ Fast

Evaporation Rate \_\_\_\_\_ Very Fast

Flammability Class - CPSC \_\_\_\_\_ None

Flash point (C) \_\_\_\_\_ None

Flash point (F) \_\_\_\_\_ None

Generic Description \_\_\_\_\_ Brake Parts Cleaner

I 2 of 5 Code \_\_\_\_\_ 30078254050905

Item Number \_\_\_\_\_ 05090

KB Value \_\_\_\_\_ 95

Net Fill \_\_\_\_\_ 1 Gal

Plastic Safe \_\_\_\_\_ No

Propellant \_\_\_\_\_ None

Restricted From Sale In \_\_\_\_\_ CA, NJ

Specific Gravity \_\_\_\_\_ 1.62

UPC Code \_\_\_\_\_ 078254050904

Unit Dimensions \_\_\_\_\_ 10.25H x 5W x 6.13D in

Unit Package Description \_\_\_\_\_ 1 Gallon Bottle

Units per Case \_\_\_\_\_ 4

VOC % (Consumer Product def) \_\_\_\_\_ 0

VOC % (Federal) \_\_\_\_\_ 0

VOC Category \_\_\_\_\_ Brake Cleaner

VOC Lbs./Gal. (Federal) \_\_\_\_\_ 0

VOC g/L (Consumer Product def) \_\_\_\_\_ 0

VOC g/L (Federal) \_\_\_\_\_ 0

VOC lbs/gal (Consumer Prod def) \_\_\_\_\_ 0

---



Part No. 05088PS

Item# 1008011

# CRC® Brakleen® Pro-Series Brake Parts Cleaner - Non-Chlorinated, 18 Wt Oz

## Description

Maintaining clean brake and disc parts can improve the life of your car's braking system and keep you safe on the roads. Using a brake parts cleaner for cleaning and degreasing is a great way to maximize the performance and increase the longevity of your entire brake system. CRC Brakleen® offers a powerful non-chlorinated spray cleaner that works like no other. The Brakleen® Pro-Series line is designed for superior performance where it's needed most: IN THE SHOP!

## Applications

- All Brake Parts: ABS
- Drum
- Brake Drums
- Brake Shoes
- Clutch Discs
- Discs Safe For Use on All Brake Systems Including Springs & Wedge Brakes
- Disc
- Brake Cylinders
- Brake Linings
- Calipers
- Disc Brake Pads



Appearance \_\_\_\_\_ Colorless Liquid

Brand \_\_\_\_\_ CRC

Case# \_\_\_\_\_ 1003705

DOT Proper Shipping Name \_\_\_\_\_ Aerosols, Flammable, Limited  
Quantity

Evaporation Rate \_\_\_\_\_ Fast

Flammability Class - CPSC \_\_\_\_\_ Extremely Flammable

Flash point (C) \_\_\_\_\_ -17.8°C

Flash point (F) \_\_\_\_\_ 0°F

Generic Description \_\_\_\_\_ Non-Chlorinated w/PowerJet®  
Actuator

I 2 of 5 Code \_\_\_\_\_ 30078254350883

Item Number \_\_\_\_\_ 05088PS

Net Fill \_\_\_\_\_ 18 Wt Oz

Plastic Safe \_\_\_\_\_ No

Propellant \_\_\_\_\_ Carbon Dioxide

Restricted From Sale In \_\_\_\_\_ CA, CO, CT, DC, DE, IL, IN, ME,  
MD, MA, MI, NH, NJ, NY, OH,  
PA, RI, parts of UT, VA

UPC Code \_\_\_\_\_ 078254350882

Unit Dimensions \_\_\_\_\_ 9.19H x 3.0W x 3.0D in

Unit Package Description \_\_\_\_\_ 24 Ounce Aerosol

Units per Case \_\_\_\_\_ 1

VOC % (Consumer Product def) \_\_\_\_\_ 95.8

VOC % (Federal) \_\_\_\_\_ 95.8

VOC Category \_\_\_\_\_ Brake Cleaner

VOC Lbs./Gal. (Federal) \_\_\_\_\_ 5.88

VOC g/L (Consumer Product  
def) \_\_\_\_\_ 704.7

VOC g/L (Federal) \_\_\_\_\_ 704.7

VOC lbs/gal (Consumer Prod  
def) \_\_\_\_\_ 5.88

---



Part No. SL3174

Item# 1007886

## Sta-Lube® Constant Velocity (CV) Joint Grease, 4 Wt Oz

### Description

A special lithium base grease fortified with molybdenum disulfide and polymers. It is used for the installation & repair work on CV joints. Will extend the life of the CV joint & the additives will sustain the shock loads encountered in the CV joints

### Applications

- CV Joints Found in Front and Rear Wheel Drive Vehicles Safe For Use in Both Domestic and Foreign CV Joints

4 Ball EP \_\_\_\_\_ 400 kg (weld point)

Brand \_\_\_\_\_ Sta-Lube

DOT Proper Shipping Name \_\_\_\_\_ Not Regulated

Drop Point \_\_\_\_\_ 350°F

Evaporation Rate \_\_\_\_\_ Not Determined

Flash point (C) \_\_\_\_\_ 235°C

Gap Fill \_\_\_\_\_ N/A

I 2 of 5 Code \_\_\_\_\_ 30072213317405

Item Number \_\_\_\_\_ SL3174

Low Temp Torque \_\_\_\_\_ N/A

Net Fill \_\_\_\_\_ 4 Wt Oz

Plastic Safe \_\_\_\_\_ N/A

Pour Point (C) \_\_\_\_\_ Not determined

Propellant \_\_\_\_\_ None

Removal (How To) \_\_\_\_\_ Remove with a degreaser or  
brake cleaner product.

Specific Gravity \_\_\_\_\_ 0.9 at 60°F

UPC Code \_\_\_\_\_ 072213317404

Unit Package Description \_\_\_\_\_ 4 ounce Tube

VOC % (Consumer Product def) \_\_\_\_\_ 0

VOC Category \_\_\_\_\_ Not Regulated

VOC g/L (Consumer Product def) \_\_\_\_\_ 0

VOC lbs/gal (Consumer Prod def) \_\_\_\_\_ 0

Working Temp (C) \_\_\_\_\_ Not Determined

Appearance \_\_\_\_\_ Dark Gray Semi-Solid to Solid  
Grease

Case# \_\_\_\_\_ 1007885

Dielectric Strength \_\_\_\_\_ Not Determined

Elastomer Compatibility \_\_\_\_\_ Compatible with Neoprene and  
Hytrel

Flammability Class - CPSC \_\_\_\_\_ None

Flash point (F) \_\_\_\_\_ 455°F

Generic Description \_\_\_\_\_ Constant Velocity Joint Grease

ISO Viscosity Grade \_\_\_\_\_ 68 (base oil)

Locking Strength \_\_\_\_\_ N/A

NLGI Grade \_\_\_\_\_ 1.5

Oil Separation \_\_\_\_\_ N/A

Pour Point \_\_\_\_\_ 10°F

Pour Point (F) \_\_\_\_\_ Not determined

Recoat \_\_\_\_\_ N/A

SAE Grade \_\_\_\_\_ N/A

Timken OK Load [Lbs.] \_\_\_\_\_ 60 Lbs

Unit Dimensions \_\_\_\_\_ 9.25H x 4W x 1.5D in

Units per Case \_\_\_\_\_ 12

VOC % (Federal) \_\_\_\_\_ 92.4

VOC Lbs./Gal. (Federal) \_\_\_\_\_ 6.9

VOC g/L (Federal) \_\_\_\_\_ 830

Worked Penetration \_\_\_\_\_ 290 to 310

Working Temp (F) \_\_\_\_\_ Not Determined



Part No. 05017

Item# 1003632

# CRC® Disc Brake Quiet, 9 Wt Oz

## Description

Disc Brake Quiet forms a water resistant, high-temperature film that absorbs noise while quieting squeaks & squeals. Specially formulated to dampen the vibrations that cause brake noise. For use on the back of non-shimmed disc pads.

## Applications

- Backing Plates
- Brake Pad Contact Points
- Disc Brake Pads

Appearance Red Liquid

Brand CRC

Case# 1003631

Color None

DOT Proper Shipping Name Aerosols, Flammable, Limited Quantity (Marine Pollutant)

Dielectric Strength 26,600 Volts/Mil

Evaporation Rate Moderate

Film Type Dry

Flammability Class - CPSC Extremely Flammable

Flash point (C) -20°C

Flash point (F) -4°F

Generic Description Disc Brake Quiet

I 2 of 5 Code 30078254050172

Item Number 05017

Net Fill 9 Wt Oz

Propellant Hydrocarbon

Removal (How To) Remove with a degreaser or brake cleaner product.

Specific Gravity 0.770 to 0.780

UPC Code 078254050171

Unit Dimensions 6.25H x 2.63W x 2.63D in

Unit Package Description 12 Ounce Aerosol

Units per Case 12

VOC % (Consumer Product def) 59.5

VOC Category Not Regulated

VOC g/L (Consumer Product def) 461

VOC lbs/gal (Consumer Product def) 3.8



Part No. 05091

Item# 1003714

# CRC® Brakleen® Brake Parts Cleaner, 5 Gal

## Description

The original brake parts cleaner. Formulated to quickly & effectively remove grease, brake dust, brake fluids, oils, & other contaminants from brake parts, lining, pads.

## Applications

Safe For Use on All Brake Systems Including:

- ABS
- Drum
- Brake Drums
- Brake Shoes
- Clutch Discs
- Discs
- Disc
- Brake Cylinders
- Brake Linings
- Calipers
- Disc Brake Pads
- Springs & Wedge Brakes

Appearance \_\_\_\_\_ Colorless Liquid

Brand \_\_\_\_\_ CRC

Color \_\_\_\_\_ None

DOT Proper Shipping Name \_\_\_\_\_ Tetrachloroethylene (Marine Pollutant)

Dielectric Strength \_\_\_\_\_ 37,500 Volts

Dry Time Fully Dry \_\_\_\_\_ Fast

Evaporation Rate \_\_\_\_\_ Very Fast

Flammability Class - CPSC \_\_\_\_\_ None

Flash point (C) \_\_\_\_\_ None

Flash point (F) \_\_\_\_\_ None

Generic Description \_\_\_\_\_ Brake Parts Cleaner

Item Number \_\_\_\_\_ 05091

KB Value \_\_\_\_\_ 95

Net Fill \_\_\_\_\_ 5 Gal

Plastic Safe \_\_\_\_\_ No

Propellant \_\_\_\_\_ None

Restricted From Sale In \_\_\_\_\_ CA, NJ

Specific Gravity \_\_\_\_\_ 1.62

UPC Code \_\_\_\_\_ 078254050911

Unit Dimensions \_\_\_\_\_ 13.8H x 11.3W x 11.3D in

Unit Package Description \_\_\_\_\_ 5 Gallon Pail

Units per Case \_\_\_\_\_ 1

VOC % (Consumer Product def) \_\_\_\_\_ 0

VOC % (Federal) \_\_\_\_\_ 0

VOC Category \_\_\_\_\_ Brake Cleaner

VOC Lbs./Gal. (Federal) \_\_\_\_\_ 0

VOC g/L (Consumer Product def) \_\_\_\_\_ 0

VOC g/L (Federal) \_\_\_\_\_ 0

VOC lbs/gal (Consumer Prod def) \_\_\_\_\_ 0

---



Part No. 05085

Item# 1003700

# CRC® Brakleen® Brake Parts Cleaner - Non-Chlorinated, 1 Gal

## Description

Now Even Stronger - As the market leader in brake parts cleaning technology, CRC Industries is continuously innovating to provide products with a competitive edge that work better and faster to make our end-users' jobs easier. To that end, we are excited to introduce the latest improvement in a long line of premium, high-performing products. Announcing an improved formula for our High VOC Non-Chlorinated Brake Parts Cleaner. The new, more powerful formula cleans and dries faster using less product, allowing end-users to get more accomplished.

## Applications

Safe For Use on All Brake Systems Including:

- ABS
- Drum
- Brake Drums
- Brake Shoes
- Clutch Discs
- Discs
- Disc
- Brake Cylinders
- Brake Linings
- Calipers
- Disc Brake Pads
- Springs & Wedge Brakes



Appearance Clear Liquid

Brand CRC

Case# 1003699

Color None

DOT Proper Shipping Name Flammable Liquid, n.o.s.  
(Heptanes, Isopropyl alcohol)

Evaporation Rate Fast

Film Type N/A

Flammability Class - CPSC Extremely Flammable

Flash point (C) -9

Flash point (F) 15.8

Ford Tox No. 177602

Generic Description Non-Chlorinated Brake Parts  
Cleaner

I 2 of 5 Code 30078254050851

Item Number 05085

Net Fill 1 Gal

Plastic Safe No

Propellant None

Removal (How To) N/A

Restricted From Sale In CA, CO, CT, DC, DE, IL, IN, ME,  
MD, MA, MI, NH, NJ, NY, OH,  
PA, RI, parts of UT, VA

Specific Gravity 0.7824

UPC Code 078254050850

Unit Dimensions 10.25H x 5W x 6.13D in

Unit Package Description 1 Gallon Bottle

Units per Case 4

VOC % (Consumer Product def) 100

VOC % (Federal) 100

VOC Category Brake Cleaner

VOC Lbs./Gal. (Federal) 5.8

VOC g/L (Consumer Product def) 695

VOC g/L (Federal) 695

VOC lbs/gal (Consumer Prod def) 5.8

---



Part No. SL3166

Item# 1007884

# Sta-Lube® Hi Temperature Disc Brake Wheel Bearing Grease, 7 Lbs

## Discontinued

Discontinued product number may still be available for a limited time through your local supplier or retailer.

### Description

A very stable resistant Aluminum Complex grease. Contains rust & oxidation inhibitors, anti-wear and extreme pressure additives & fortified with "moly" and graphite. For use in automotive disc/drum brakes, chassis and suspension systems

### Applications

- Automotive Applications
- Bearings
- Construction Ball & Roller Bearings
- Disc-Brake Systems
- Guides
- Press Rolls
- Slides
- Ball Joints
- ChassisPoints
- Conveyor Bearings
- Farm Equipment
- Mining Applications
- Roller Bearings
- Wheel Bearings

4 Ball EP 30 LWI,315 Kg Weld

Appearance Dark Gray Semi-Solid to Solid Grease

Case# 1007883

Drop Point 500°F

Evaporation Rate <0.01 (Butyl Acetate=1)

Flash point (C) >232°C

Generic Description Hi-Temp Disc Brake Wheel Grease

ISO Viscosity Grade 205

Leakage 10g Max

Net Fill 7 Liter

Pour Point 0°F

Pour Point (F) 0°F

Propellant None

Specific Gravity 0.9 at 60°F

UPC Code 072213316605

Unit Package Description 7 Pound Pail

VOC % (Consumer Product def) 0.4

VOC g/L (Consumer Product def) 3.6

Water Washout <15%

Working Temp (C) -18 to 162.5°C

4 Ball Wear 0.75 mm

Brand Sta-Lube

DOT Proper Shipping Name Not Regulated

Elastomer Compatibility 0 to 30% vol; 0 to 15 hard

Flammability Class - CPSC None

Flash point (F) >450°F

I 2 of 5 Code 30072213316606

Item Number SL3166

NLGI Grade 2

Oil Separation <10%

Pour Point (C) -17.78°C

Product Lifecycle Status DISC

Removal (How To) Remove with a degreaser or brake cleaner product.

Timken OK Load [Lbs.] 60 Lbs

Unit Dimensions 7.75H x 7.5W x 7.5D in

Units per Case 4

VOC Category Not Regulated

VOC lbs/gal (Consumer Prod def) 0.03

Worked Penetration 265 to 295

Working Temp (F) 0 to 325°F



Part No. 05528

Item# 1003820

# CRC® Air Brake Anti Freeze, 1 Gal

## Description

Provides complete winter protection for all brake systems. Will eliminate and prevent moisture accumulation and icing.

## Applications

- For Use in All Air-Brake Systems

Appearance \_\_\_\_\_ Colorless Liquid

Brand \_\_\_\_\_ CRC

Case# \_\_\_\_\_ 1003819

Color \_\_\_\_\_ None

DOT Proper Shipping Name \_\_\_\_\_ Methanol

Evaporation Rate \_\_\_\_\_ Fast

Flammability Class - CPSC \_\_\_\_\_ Flammable

Flash point (C) \_\_\_\_\_ 12°C

Flash point (F) \_\_\_\_\_ 54°F

Generic Description \_\_\_\_\_ Premium Air Brake Anti Freeze

I 2 of 5 Code \_\_\_\_\_ 30078254055283

Item Number \_\_\_\_\_ 05528

Net Fill \_\_\_\_\_ 1 Gal

Plastic Safe \_\_\_\_\_ Yes

Propellant \_\_\_\_\_ None

Specific Gravity \_\_\_\_\_ 0.79

UPC Code \_\_\_\_\_ 078254055282

Unit Dimensions \_\_\_\_\_ 10.25H x 5W x 6.13D in

Unit Package Description \_\_\_\_\_ 1 Gallon Can

Units per Case \_\_\_\_\_ 4

VOC % (Consumer Product def) \_\_\_\_\_ 100

VOC % (Federal) \_\_\_\_\_ 100

VOC Category \_\_\_\_\_ Not Regulated

VOC Lbs./Gal. (Federal) \_\_\_\_\_ 12.9

VOC g/L (Consumer Product def) \_\_\_\_\_ 792

VOC g/L (Federal) \_\_\_\_\_ 1550.6

VOC lbs/gal (Consumer Prod def) \_\_\_\_\_ 6.6

---



Part No. 05051

Item# 1003666

# CRC® Brakleen® Non-Chlorinated Brake Parts Cleaner - 50 State Formula, 1 Gal

## Description

Removes brake fluid, grease, oil, and other contaminants quickly and effectively. Cleans & degreases brake parts, linings, calipers, drums and more!

## Applications

- Brake Linings
- Clutches
- Springs
- Drums
- Brake Parts
- Wheel Cylinders
- Cv Joints
- Disc Brake Parts & Calipers

Appearance Clear Liquid

Brand CRC

Case# 1003665

Color None

DOT Proper Shipping Name Flammable Liquids, N.O.S.  
(Acetone, Heptane)

Dielectric Strength 6,300 Volts

Evaporation Rate Fast

Flammability Class - CPSC Extremely Flammable

Flash point (C) <0°C

Flash point (F) <32°F

Generic Description Non-Chlorinated, Low VOC  
Brake Parts Cleaner

I 2 of 5 Code 30078254050516

Item Number 05051

KB Value >200

Net Fill 1 Gal

Plastic Safe No

Propellant None

Specific Gravity 0.78

UPC Code 078254050515

Unit Dimensions 10.25H x 5W x 6.13D in

Unit Package Description 1 Gallon Bottle

Units per Case 4

VOC % (Consumer Product def) 10

VOC % (Federal) 10

VOC Category Brake Cleaner

VOC Lbs./Gal. (Federal) 0.65

VOC g/L (Consumer Product def) 78

VOC g/L (Federal) 78

VOC lbs/gal (Consumer Prod def) 0.65

---



Part No. 05086

Item# 1003701

# CRC® Brakleen® Brake Parts Cleaner - Non-Chlorinated, 5 Gal

## Description

The Brake Cleaner to use where compliance calls for a chlorine-free product. Formulated to quickly remove brake fluid, grease, oil, and other contaminants from brake linings & pads.

## Applications

Safe For Use on All Brake Systems Including:

- ABS
- Drum
- Brake Drums
- Brake Shoes
- Clutch Discs
- Discs
- Disc
- Brake Cylinders
- Brake Linings
- Calipers
- Disc Brake Pads
- Springs & Wedge Brakes



Appearance \_\_\_\_\_ Clear Liquid

Color \_\_\_\_\_ None

Evaporation Rate \_\_\_\_\_ Fast

Flash point (C) \_\_\_\_\_ <-17.8°C

Ford Tox No. \_\_\_\_\_ 176602

Item Number \_\_\_\_\_ 05086

Plastic Safe \_\_\_\_\_ No

Restricted From Sale In \_\_\_\_\_ CA, CO, CT, DE, MD, MI, NH,  
NY, OH, RI, parts of UT

UPC Code \_\_\_\_\_ 078254050867

Unit Package Description \_\_\_\_\_ 5 Gallon Pail

VOC % (Consumer Product def) \_\_\_\_\_ 45

VOC Category \_\_\_\_\_ Brake Cleaner

VOC g/L (Consumer Product def) \_\_\_\_\_ 365

VOC lbs/gal (Consumer Prod def) \_\_\_\_\_ 3

Brand \_\_\_\_\_ CRC

DOT Proper Shipping Name \_\_\_\_\_ Flammable Liquids, N.O.S. (Acetone,  
Heptane), Marine Pollutant

Flammability Class - CPSC \_\_\_\_\_ Extremely Flammable

Flash point (F) \_\_\_\_\_ <0°F

Generic Description \_\_\_\_\_ Non-Chlorinated Brake Parts  
Cleaner

Net Fill \_\_\_\_\_ 5 Gal

Propellant \_\_\_\_\_ None

Specific Gravity \_\_\_\_\_ 0.7845

Unit Dimensions \_\_\_\_\_ 13.8H x 11.3W x 11.3D in

Units per Case \_\_\_\_\_ 1

VOC % (Federal) \_\_\_\_\_ 45

VOC Lbs./Gal. (Federal) \_\_\_\_\_ 5.8

VOC g/L (Federal) \_\_\_\_\_ 697.8

---



Part No. 05186

Item# 1003747

# CRC® Brakleen® Non-Chlorinated Brake Parts Cleaner, 5 Gal

## Description

Now Even Stronger - As the market leader in brake parts cleaning technology, CRC Industries is continuously innovating to provide products with a competitive edge that work better and faster to make our end-users' jobs easier. To that end, we are excited to introduce the latest improvement in a long line of premium, high-performing products. Announcing an improved formula for our High VOC Non-Chlorinated Brake Parts Cleaner. The new, more powerful formula cleans and dries faster using less product, allowing end-users to get more accomplished.

## Applications

Safe For Use on All Brake Systems Including:

- ABS
- Drum
- Brake Drums
- Brake Shoes
- Clutch Discs
- Discs
- Disc
- Brake Cylinders
- Brake Linings
- Calipers
- Disc Brake Pads
- Springs & Wedge Brakes

Appearance \_\_\_\_\_ Clear Liquid

Color \_\_\_\_\_ None

Evaporation Rate \_\_\_\_\_ Fast

Flammability Class - CPSC \_\_\_\_\_ Extremely Flammable

Flash point (F) \_\_\_\_\_ 15.8

Generic Description \_\_\_\_\_ Non-Chlorinated Brake Parts Cleaner

Net Fill \_\_\_\_\_ 5 Gal

Propellant \_\_\_\_\_ None

Restricted From Sale In \_\_\_\_\_ CA, CO, CT, DC, DE, IL, IN, ME, MD, MA, MI, NH, NJ, NY, OH, PA, RI, parts of UT, VA

UPC Code \_\_\_\_\_ 078254051864

Unit Package Description \_\_\_\_\_ 5 Gallon Pail

VOC % (Consumer Product def) \_\_\_\_\_ 100

VOC Category \_\_\_\_\_ Brake Cleaner

VOC g/L (Consumer Product def) \_\_\_\_\_ 695

VOC lbs/gal (Consumer Prod def) \_\_\_\_\_ 5.8

Brand \_\_\_\_\_ CRC

DOT Proper Shipping Name \_\_\_\_\_ Flammable Liquid, n.o.s. (Heptanes, Isopropyl alcohol)

Film Type \_\_\_\_\_ N/A

Flash point (C) \_\_\_\_\_ -9

Ford Tox No. \_\_\_\_\_ 177602

Item Number \_\_\_\_\_ 05186

Plastic Safe \_\_\_\_\_ No

Removal (How To) \_\_\_\_\_ N/A

Specific Gravity \_\_\_\_\_ 0.7824

Unit Dimensions \_\_\_\_\_ 13.8H x 11.3W x 11.3D in

Units per Case \_\_\_\_\_ 1

VOC % (Federal) \_\_\_\_\_ 100

VOC Lbs./Gal. (Federal) \_\_\_\_\_ 5.8

VOC g/L (Federal) \_\_\_\_\_ 695

---



Part No. SL3195

Item# 1007895

# Sta-Lube® Sta-Plex™ Extreme Pressure Premium Red Grease, 35 Lbs

## Description

A superior multi-purpose certified lithium complex based NLGI #2 grease. Contains extreme pressure, anti-wear, & anti-oxidation additives. Ideal for high temperature & performance applications. Drop point 500°F

## Applications

- Ind Mining
- Machining
- Pumps
- Ball & Roller Bearings
- Assembly Plants
- Trucks
- Buses
- Off-Road Operations
- Reapers
- Metal Production
- Plastic Molding
- Electric Motors
- Kilns
- Drying Ovens
- Automobiles
- Construction Equipment
- Tractors Mowers
- Water Pumps

4 Ball EP 315 kg Weld,50 LWI

Appearance Red Semi-Solid to Solid Grease

DOT Proper Shipping Name Not Regulated

Evaporation Rate <1 (Butyl Acetate=1)

Flash point (C) 150°C

Generic Description Premium Red Grease

Leakage 10g Max

NLGI Grade 2

NSF Number 145511

Oil Separation 0.012

Propellant None

Specific Gravity 0.9 at 60°F

UPC Code 072213319507

Unit Package Description 35 Pound Pail

VOC % (Consumer Product def) 0

VOC Category Not Regulated

VOC g/L (Federal) 0

Water Washout 0.041

Working Temp (C) -23 to 163°C

4 Ball Wear 0.54 mm

Brand Sta-Lube

Drop Point 500+°F

Flammability Class - CPSC Not a Consumer Product

Flash point (F) 302°F

Item Number SL3195

Low Temp Torque 13.0 Nm

NSF Category Code H2

Net Fill 35 Liter

Pour Point 5°F

Removal (How To) Remove with a degreaser or brake cleaner product.

Timken OK Load [Lbs.] 60 Lbs Min

Unit Dimensions 14.5H x 12W x 12D in

Units per Case 1

VOC % (Federal) 0

VOC g/L (Consumer Product def) 0

VOC lbs/gal (Consumer Prod def) 0

Worked Penetration 265 to 295

Working Temp (F) -10 to 325°F



Part No. SL3165

Item# 1007882

# Sta-Lube® Hi Temperature Disc Brake Wheel Bearing Grease, 35 Lbs

## Discontinued

Discontinued product number may still be available for a limited time through your local supplier or retailer.

### Description

A very stable resistant Aluminum Complex grease. Contains rust & oxidation inhibitors, anti-wear and extreme pressure additives & fortified with "moly" and graphite. For use in automotive disc/drum brakes, chassis and suspension systems

### Applications

- Automotive Applications
- Bearings
- Construction Ball & Roller Bearings
- Disc-Brake Systems
- Guides
- Press Rolls
- Slides
- Ball Joints
- ChassisPoints
- Conveyor Bearings
- Farm Equipment
- Mining Applications
- Roller Bearings
- Wheel Bearings

4 Ball EP 30 LWI,315 Kg Weld

Appearance Dark Gray Semi-Solid to Solid Grease

DOT Proper Shipping Name Not Regulated

Elastomer Compatibility 0 to 30% vol; 0 to 15 hard

Flammability Class - CPSC None

Flash point (F) >450°F

ISO Viscosity Grade 205

Leakage 10g Max

Net Fill 35 Liter

Pour Point 0°F

Pour Point (F) 0°F

Propellant None

Specific Gravity 0.9 at 60°F

UPC Code 072213316506

Unit Package Description 35 Pound Pail

VOC % (Consumer Product def) 0.4

VOC g/L (Consumer Product def) 3.6

Water Washout <15%

Working Temp (C) -18 to 162.5°C

4 Ball Wear 0.75 mm

Brand Sta-Lube

Drop Point 500°F

Evaporation Rate <0.01 (Butyl Acetate=1)

Flash point (C) >232°C

Generic Description Hi-Temp Disc Brake Wheel Grease

Item Number SL3165

NLGI Grade 2

Oil Separation <10%

Pour Point (C) -17.78°C

Product Lifecycle Status DISC

Removal (How To) Remove with a degreaser or brake cleaner product.

Timken OK Load [Lbs.] 60 Lbs

Unit Dimensions 14.5H x 12W x 12D in

Units per Case 1

VOC Category Not Regulated

VOC lbs/gal (Consumer Prod def) 0.03

Worked Penetration 265 to 295

Working Temp (F) 0 to 325°F



Part No. 05052

Item# 1003667

# CRC® Brakleen® Non-Chlorinated Brake Parts Cleaner - 50 State Formula, 5 Gal

## Description

Removes brake fluid, grease, oil, and other contaminants quickly and effectively. Cleans & degreases brake parts, linings, calipers, drums and more!

## Applications

- Brake Linings
- Clutches
- Springs
- Drums
- Brake Parts
- Wheel Cylinders
- Cv Joints
- Disc Brake Parts & Calipers



Appearance Clear Liquid

Color None

Dielectric Strength 6,300 Volts

Flammability Class - CPSC Extremely Flammable

Flash point (F) <32°F

Item Number 05052

Net Fill 5 Gal

Propellant None

UPC Code 078254050522

Unit Package Description 5 Gallon Pail

VOC % (Consumer Product def) 10

VOC Category Brake Cleaner

VOC g/L (Consumer Product def) 78

VOC lbs/gal (Consumer Prod def) 0.65

Brand CRC

DOT Proper Shipping Name Flammable Liquids, N.O.S. (Acetone, Heptane)

Evaporation Rate Fast

Flash point (C) <0°C

Generic Description Non-Chlorinated, Low VOC Brake Parts Cleaner

KB Value >200

Plastic Safe No

Specific Gravity 0.78

Unit Dimensions 13.8H x 11.3W x 11.3D in

Units per Case 1

VOC % (Federal) 10

VOC Lbs./Gal. (Federal) 0.65

VOC g/L (Federal) 78



Part No. SL3197

Item# 1007896

# Sta-Lube® Sta-Plex™ Extreme Pressure Premium Red Grease, 120 lbs

## Discontinued

alternate available **Product No. SL3195** **ITEM# 1007895**

Discontinued product number may still be available for a limited time through your local supplier or retailer.

### Description

A superior multi-purpose certified lithium complex based NLGI #2 grease. Contains extreme pressure, anti-wear, & anti-oxidation additives. Ideal for high temperature & performance applications. Drop point 500°F

### Applications

- Ind Mining
- Machining
- Pumps
- Ball & Roller Bearings
- Assembly Plants
- Trucks
- Buses
- Off-Road Operations
- Reapers
- Metal Production
- Plastic Molding
- Electric Motors
- Kilns
- Drying Ovens
- Automobiles
- Construction Equipment
- Tractors Mowers
- Water Pumps

4 Ball EP \_\_\_\_\_ 315 kg Weld,50 LWI

Appearance \_\_\_\_\_ Red Semi-Solid to Solid Grease

DOT Proper Shipping Name \_\_\_\_\_ Not Regulated

Drop Point \_\_\_\_\_ 500+°F

Evaporation Rate \_\_\_\_\_ <1 (Butyl Acetate=1)

Flash point (C) \_\_\_\_\_ 150°C

Gap Fill \_\_\_\_\_ N/A

ISO Viscosity Grade \_\_\_\_\_ N/A

Leakage \_\_\_\_\_ 10g Max

Low Temp Torque \_\_\_\_\_ 13.0 Nm

NSF Category Code \_\_\_\_\_ H2

Net Fill \_\_\_\_\_ 120 Liter

Pour Point \_\_\_\_\_ 5°F

Pour Point (F) \_\_\_\_\_ Not Determined

Propellant \_\_\_\_\_ None

Removal (How To) \_\_\_\_\_ Remove with a degreaser or  
brake cleaner product.

Replacement Product SKU \_\_\_\_\_ 1007895

Specific Gravity \_\_\_\_\_ 0.9 at 60°F

Treatment Ratio \_\_\_\_\_ N/A

Unit Dimensions \_\_\_\_\_ 26.88H x 14.65W x 14.65D in

Units per Case \_\_\_\_\_ 1

VOC % (Federal) \_\_\_\_\_ 0

VOC Lbs./Gal. (Federal) \_\_\_\_\_ 0

VOC g/L (Federal) \_\_\_\_\_ 0

Viscosity @68 F [cP] \_\_\_\_\_ Not Determined

Worked Penetration \_\_\_\_\_ 265 to 295

Working Temp (F) \_\_\_\_\_ -10 to 325°F

4 Ball Wear \_\_\_\_\_ 0.54 mm

Brand \_\_\_\_\_ Sta-Lube

Dielectric Strength \_\_\_\_\_ Not Determined

Elastomer Compatibility \_\_\_\_\_ N/A

Flammability Class - CPSC \_\_\_\_\_ None

Flash point (F) \_\_\_\_\_ 302°F

Generic Description \_\_\_\_\_ Premium Red Grease

Item Number \_\_\_\_\_ SL3197

Locking Strength \_\_\_\_\_ N/A

NLGI Grade \_\_\_\_\_ 2

NSF Number \_\_\_\_\_ 145511

Oil Separation \_\_\_\_\_ 1.20%

Pour Point (C) \_\_\_\_\_ Not Determined

Product Lifecycle Status \_\_\_\_\_ DISC

Recoat \_\_\_\_\_ N/A

Replacement Legacy Num \_\_\_\_\_ SL3195

Restricted From Sale In \_\_\_\_\_ N/A

Timken OK Load [Lbs.] \_\_\_\_\_ 60 Lbs Min

UPC Code \_\_\_\_\_ 072213319705

Unit Package Description \_\_\_\_\_ 120 Pound Keg

VOC % (Consumer Product def) \_\_\_\_\_ 1

VOC Category \_\_\_\_\_ Not Regulated

VOC g/L (Consumer Product  
def) \_\_\_\_\_ 9

VOC lbs/gal (Consumer Prod  
def) \_\_\_\_\_ 0.075

Water Washout \_\_\_\_\_ 4.10%

Working Temp (C) \_\_\_\_\_ -23 to 163°C

Алматы (727)345-47-04  
Ангарск (3955)60-70-56  
Архангельск (8182)63-90-72  
Астрахань (8512)99-46-04  
Барнаул (3852)73-04-60  
Белгород (4722)40-23-64  
Благовещенск (4162)22-76-07  
Брянск (4832)59-03-52  
Владивосток (423)249-28-31  
Владикавказ (8672)28-90-48  
Владимир (4922)49-43-18  
Волгоград (844)278-03-48  
Вологда (8172)26-41-59  
Воронеж (473)204-51-73  
Екатеринбург (343)384-55-89

Иваново (4932)77-34-06  
Ижевск (3412)26-03-58  
Иркутск (395)279-98-46  
Казань (843)206-01-48  
Калининград (4012)72-03-81  
Калуга (4842)92-23-67  
Кемерово (3842)65-04-62  
Киров (8332)68-02-04  
Коломна (4966)23-41-49  
Кострома (4942)77-07-48  
Краснодар (861)203-40-90  
Красноярск (391)204-63-61  
Курск (4712)77-13-04  
Курган (3522)50-90-47  
Липецк (4742)52-20-81

Магнитогорск (3519)55-03-13  
Москва (495)268-04-70  
Мурманск (8152)59-64-93  
Набережные Челны (8552)20-53-41  
Нижний Новгород (831)429-08-12  
Новокузнецк (3843)20-46-81  
Ноябрьск (3496)41-32-12  
Новосибирск (383)227-86-73  
Омск (3812)21-46-40  
Орел (4862)44-53-42  
Оренбург (3532)37-68-04  
Пенза (8412)22-31-16  
Петрозаводск (8142)55-98-37  
Псков (8112)59-10-37  
Пермь (342)205-81-47

Ростов-на-Дону (863)308-18-15  
Рязань (4912)46-61-64  
Самара (846)206-03-16  
Санкт-Петербург (812)309-46-40  
Саратов (845)249-38-78  
Севастополь (8692)22-31-93  
Саранск (8342)22-96-24  
Симферополь (3652)67-13-56  
Смоленск (4812)29-41-54  
Сочи (862)225-72-31  
Ставрополь (8652)20-65-13  
Сургут (3462)77-98-35  
Сыктывкар (8212)25-95-17  
Тамбов (4752)50-40-97  
Тверь (4822)63-31-35

Тольятти (8482)63-91-07  
Томск (3822)98-41-53  
Тула (4872)33-79-87  
Тюмень (3452)66-21-18  
Ульяновск (8422)24-23-59  
Улан-Удэ (3012)59-97-51  
Уфа (347)229-48-12  
Хабаровск (4212)92-98-04  
Чебоксары (8352)28-53-07  
Челябинск (351)202-03-61  
Череповец (8202)49-02-64  
Чита (3022)38-34-83  
Якутск (4112)23-90-97  
Ярославль (4852)69-52-93

**Россия** +7(495)268-04-70

**Казахстан** +7(727)345-47-04

**Беларусь** +(375)257-127-884

**Узбекистан** +998(71)205-18-59

**Киргизия** +996(312)96-26-47

По вопросам продаж и поддержки обращайтесь:

эл.почта: [cce@nt-rt.ru](mailto:cce@nt-rt.ru) || сайт: <https://crc.nt-rt.ru/>