

Дизельные добавки

Технические характеристики

По вопросам продаж и поддержки обращайтесь:

Алматы (727)345-47-04
Ангарск (3955)60-70-56
Архангельск (8182)63-90-72
Астрахань (8512)99-46-04
Барнаул (3852)73-04-60
Белгород (4722)40-23-64
Благовещенск (4162)22-76-07
Брянск (4832)59-03-52
Владивосток (423)249-28-31
Владикавказ (8672)28-90-48
Владимир (4922)49-43-18
Волгоград (844)278-03-48
Вологда (8172)26-41-59
Воронеж (473)204-51-73
Екатеринбург (343)384-55-89

Иваново (4932)77-34-06
Ижевск (3412)26-03-58
Иркутск (395)279-98-46
Казань (843)206-01-48
Калининград (4012)72-03-81
Калуга (4842)92-23-67
Кемерово (3842)65-04-62
Киров (8332)68-02-04
Коломна (4966)23-41-49
Кострома (4942)77-07-48
Краснодар (861)203-40-90
Красноярск (391)204-63-61
Курск (4712)77-13-04
Курган (3522)50-90-47
Липецк (4742)52-20-81

Магнитогорск (3519)55-03-13
Москва (495)268-04-70
Мурманск (8152)59-64-93
Набережные Челны (8552)20-53-41
Нижний Новгород (831)429-08-12
Новокузнецк (3843)20-46-81
Ноябрьск (3496)41-32-12
Новосибирск (383)227-86-73
Омск (3812)21-46-40
Орел (4862)44-53-42
Оренбург (3532)37-68-04
Пенза (8412)22-31-16
Петрозаводск (8142)55-98-37
Псков (8112)59-10-37
Пермь (342)205-81-47

Ростов-на-Дону (863)308-18-15
Рязань (4912)46-61-64
Самара (846)206-03-16
Санкт-Петербург (812)309-46-40
Саратов (845)249-38-78
Севастополь (8692)22-31-93
Саранск (8342)22-96-24
Симферополь (3652)67-13-56
Смоленск (4812)29-41-54
Сочи (862)225-72-31
Ставрополь (8652)20-65-13
Сургут (3462)77-98-35
Сыктывкар (8212)25-95-17
Тамбов (4752)50-40-97
Тверь (4822)63-31-35

Тольятти (8482)63-91-07
Томск (3822)98-41-53
Тула (4872)33-79-87
Тюмень (3452)66-21-18
Ульяновск (8422)24-23-59
Улан-Удэ (3012)59-97-51
Уфа (347)229-48-12
Хабаровск (4212)92-98-04
Чебоксары (8352)28-53-07
Челябинск (351)202-03-61
Череповец (8202)49-02-64
Чита (3022)38-34-83
Якутск (4112)23-90-97
Ярославль (4852)69-52-93

Россия +7(495)268-04-70

Казахстан +7(727)345-47-04

Беларусь +(375)257-127-884

Узбекистан +998(71)205-18-59

Киргизия +996(312)96-26-47

эл.почта: cse@nt-rt.ru || сайт: <https://crc.nt-rt.ru/>



Part No. 05816

Item# 1003862

CRC® Diesel 1-Tank Power Renew®, 15 Fl Oz

Discontinued

Discontinued product number may still be available for a limited time through your local supplier or retailer.

Description

A concentrated one-tank cleanup that delivers a powerful SHOCK to your dirty fuel system. Made with the maximum available chemistry it's the most powerful diesel fuel system cleaner on the market. Excellent cleanup for the sticky injectors frequently found in modern common rail systems. Proven 100% deposit removal & reduces emissions. Cleans INSIDE the injectors & prevents IDID. Only needed 4x per year.

Applications

- For Use in Diesel Engines to Super-Clean Fuel System

Appearance _____ Dark Brown Liquid

Brand _____ CRC

Case# _____ 1003861

Color _____ None

DOT Proper Shipping Name _____ Not Regulated

Evaporation Rate _____ Slow

Flammability Class - CPSC _____ Combustible

Flash point (C) _____ 67.2°C

Flash point (F) _____ 153°F

Generic Description _____ Complete Diesel System Cleanup

I 2 of 5 Code _____ 50078254058165

Item Number _____ 05816

Net Fill _____ 15 Fl Oz

Plastic Safe _____ No

Product Lifecycle Status _____ DSEL

Propellant _____ None

Removal (How To) _____ Remove with petroleum
distillates.

Specific Gravity _____ 0.886

Treatment Ratio _____ 1 Bottle (15 fl oz) treats 30 Gal
of diesel fuel

UPC Code _____ 078254058160

Unit Dimensions _____ 8.75H x 3.69W x 3.5D in

Unit Package Description _____ 16 Ounce Bottle

Units per Case _____ 6

VOC % (Consumer Product def) _____ 70.3

VOC % (Federal) _____ 97.3

VOC Category _____ Not Regulated

VOC Lbs./Gal. (Federal) _____ 12.6

VOC g/L (Consumer Product
def) _____ 622.9

VOC g/L (Federal) _____ 1508.7

VOC lbs/gal (Consumer Prod
def) _____ 5.2



Part No. 05528

Item# 1003820

CRC® Air Brake Anti Freeze, 1 Gal

Description

Provides complete winter protection for all brake systems. Will eliminate and prevent moisture accumulation and icing.

Applications

- For Use in All Air-Brake Systems

Appearance _____ Colorless Liquid

Brand _____ CRC

Case# _____ 1003819

Color _____ None

DOT Proper Shipping Name _____ Methanol

Evaporation Rate _____ Fast

Flammability Class - CPSC _____ Flammable

Flash point (C) _____ 12°C

Flash point (F) _____ 54°F

Generic Description _____ Premium Air Brake Anti Freeze

I 2 of 5 Code _____ 30078254055283

Item Number _____ 05528

Net Fill _____ 1 Gal

Plastic Safe _____ Yes

Propellant _____ None

Specific Gravity _____ 0.79

UPC Code _____ 078254055282

Unit Dimensions _____ 10.25H x 5W x 6.13D in

Unit Package Description _____ 1 Gallon Can

Units per Case _____ 4

VOC % (Consumer Product def) _____ 100

VOC % (Federal) _____ 100

VOC Category _____ Not Regulated

VOC Lbs./Gal. (Federal) _____ 12.9

VOC g/L (Consumer Product def) _____ 792

VOC g/L (Federal) _____ 1550.6

VOC lbs/gal (Consumer Prod def) _____ 6.6



Part No. 05532

Item# 1003822

CRC® Air Brake Anti Freeze, 32 Fl Oz

Description

Keeping up with the winter care of your vehicle and brake system is critical. You can't afford to skip this important maintenance when the cold weather hits. CRC Air Brake Anti-Freeze is a specially formulated additive for air-brake systems. It provides complete protection by preventing damaging moisture accumulation and ice buildup in your brake system. Run smoothly all season long with CRC Air Brake Anti-Freeze.

Applications

- For Use in All Air-Brake Systems

Appearance _____ Colorless Liquid

Brand _____ CRC

Case# _____ 1003821

Color _____ None

DOT Proper Shipping Name _____ Methanol, Limited Quantity

Evaporation Rate _____ Fast

Flammability Class - CPSC _____ Flammable

Flash point (C) _____ 12.2°C

Flash point (F) _____ 54°F

Ford Tox No. _____ 198314

Generic Description _____ Premium Air Brake Anti Freeze

I 2 of 5 Code _____ 30078254055320

Item Number _____ 05532

Net Fill _____ 32 Fl Oz

Plastic Safe _____ Yes

Propellant _____ None

Specific Gravity _____ 0.79

UPC Code _____ 078254055329

Unit Dimensions _____ 8.5H x 3.13W x 4.13D in

Unit Package Description _____ 1 Quart Can

Units per Case _____ 12

VOC % (Consumer Product def) _____ 100

VOC % (Federal) _____ 100

VOC Category _____ Not Regulated

VOC Lbs./Gal. (Federal) _____ 12.9

VOC g/L (Consumer Product def) _____ 792

VOC g/L (Federal) _____ 1550.6

VOC lbs/gal (Consumer Prod def) _____ 6.6



Part No. 05555

Item# 1003823

CRC® Air Brake Anti Freeze, 55 Gal

Discontinued

Discontinued product number may still be available for a limited time through your local supplier or retailer.

Description

Provides complete winter protection for all brake systems. Will eliminate and prevent moisture accumulation and icing.

Applications

- For Use in All Air-Brake Systems

Appearance _____ Colorless Liquid

Color _____ None

Evaporation Rate _____ Fast

Flash point (C) _____ 12.2°C

Generic Description _____ Premium Air Brake Anti Freeze

Net Fill _____ 55 Gal

Product Lifecycle Status _____ DISC

Specific Gravity _____ 0.79

Unit Dimensions _____ 35H x 24.5W x 24.5D in

Units per Case _____ 1

VOC % (Federal) _____ 100

VOC Lbs./Gal. (Federal) _____ 12.9

VOC g/L (Federal) _____ 1550.6

Brand _____ CRC

DOT Proper Shipping Name _____ Methanol

Flammability Class - CPSC _____ Flammable

Flash point (F) _____ 54°F

Item Number _____ 05555

Plastic Safe _____ Yes

Propellant _____ None

UPC Code _____ 078254055558

Unit Package Description _____ 55 Gallon Drum

VOC % (Consumer Product def) _____ 100

VOC Category _____ Not Regulated

VOC g/L (Consumer Product def) _____ 792

VOC lbs/gal (Consumer Prod def) _____ 6.6



Part No. 05832

Item# 1003867

CRC® Diesel 1-Tank Power Renew®, 31 Fl Oz

Discontinued

Discontinued product number may still be available for a limited time through your local supplier or retailer.

Description

A concentrated one-tank cleanup that delivers a powerful SHOCK to your dirty fuel system. Made with the maximum available chemistry it's the most powerful diesel fuel system cleaner on the market. Excellent cleanup for the sticky injectors frequently found in modern common rail systems.

Applications

- For Use in Diesel Engines to Super-Clean Fuel System

Appearance _____ Dark Brown Liquid

Brand _____ CRC

Case# _____ 1003866

Color _____ None

DOT Proper Shipping Name _____ Not Regulated

Evaporation Rate _____ Slow

Flammability Class - CPSC _____ Combustible

Flash point (C) _____ 66.7°C

Flash point (F) _____ 152°F

Generic Description _____ Complete Diesel System

I 2 of 5 Code _____ 30078254058321

Item Number _____ 05832

Net Fill _____ 31 Fl Oz

Plastic Safe _____ No

Product Lifecycle Status _____ DISC

Propellant _____ None

Removal (How To) _____ Remove with petroleum
distillates.

Specific Gravity _____ 0.92

Treatment Ratio _____ 1 Qt treats 125 Gal, 16 oz
treats 60 gal, 8 oz treats 30
gal of diesel fuel

UPC Code _____ 078254058320

Unit Dimensions _____ 8.75H x 3.38W x 3.38D in

Unit Package Description _____ 1 Quart Bottle

Units per Case _____ 6

VOC % (Consumer Product def) _____ 95

VOC % (Federal) _____ 100

VOC Category _____ Not Regulated

VOC Lbs./Gal. (Federal) _____ 12.9

VOC g/L (Consumer Product
def) _____ 874

VOC g/L (Federal) _____ 1550.6

VOC lbs/gal (Consumer Prod
def) _____ 7.3

Part No. 05612

Item# 1003830

Diesel Cold Flow™ Anti-Gel with Lubricity, 12 fl oz

Discontinued

Discontinued product number may still be available for a limited time through your local supplier or retailer.

Description

A highly concentrated formula that inhibits gelling & improves flowability of diesel fuel in cold weather. Lowers the pour point by as much as 40 F. when used in the proper ratios.

Applications

- For Use in Diesel Engines

Appearance	Clear Amber Liquid	Case#	1003829
DOT Proper Shipping Name	Flammable Liquids, N.O.S. (Xylene, Petroleum Naphtha), Limited Quantity	Evaporation Rate	Slow
Flammability Class - CPSC	Flammable	Flash point (C)	32°C
Flash point (F)	89.6°F	Generic Description	Premium Anti Gel with Lubricity
I 2 of 5 Code	30078254056129	Item Number	05612
Net Fill	12 Fl Oz	Plastic Safe	No
Pour Point (C)	-28.89°C	Pour Point (F)	-20°F
Product Lifecycle Status	DISC	Propellant	None
Removal (How To)	Remove with petroleum distillates.	Treatment Ratio	Pre-existing Condition: 12 Fl Oz treats 75 Gal, Preventative Maintenance: 12 Fl Oz treats 125 Gal
UPC Code	078254056128	Unit Dimensions	7.88H x 2.13W x 3.5D in
Unit Package Description	12 Ounce Bottle	Units per Case	12
VOC % (Consumer Product def)	95.8	VOC % (Federal)	95.8
VOC Category	Not Regulated	VOC Lbs./Gal. (Federal)	7
VOC g/L (Consumer Product def)	840	VOC g/L (Federal)	840
VOC lbs/gal (Consumer Prod def)	7		



Part No. 05632

Item# 1003834

CRC® Diesel Cold Flow™ Anti-Gel with Lubricity, 30 Fl Oz

Discontinued

Discontinued product number may still be available for a limited time through your local supplier or retailer.

Description

A highly concentrated formula that inhibits gelling & improves flowability of diesel fuel in cold weather. Lowers the pour point by as much as 40 F. when used in the proper ratios.

Applications

- For Use in Diesel Engines

Appearance _____ Light Amber Liquid

Brand _____ CRC

Case# _____ 1003833

Color _____ None

DOT Proper Shipping Name _____ Flammable Liquids,N.O.S.
(Xylene, petroleum naptha)

Evaporation Rate _____ Slow

Flammability Class - CPSC _____ Flammable

Flash point (C) _____ 34°C

Flash point (F) _____ 93.2°F

Generic Description _____ Premium Anti Gel with Lubricity

I 2 of 5 Code _____ 30078254056327

Item Number _____ 05632

Net Fill _____ 30 Fl Oz

Plastic Safe _____ No

Pour Point (C) _____ -30.56°C

Pour Point (F) _____ -23°F

Product Lifecycle Status _____ DISC

Propellant _____ None

Removal (How To) _____ Remove with petroleum
distillates.

Restricted From Sale In _____ No State restrictions

Specific Gravity _____ 0.88

Treatment Ratio _____ Pre-existing Condition: 1 Qt treats
125 Gal,Preventative Maintenance:
1 Qt treats 500 Gal

UPC Code _____ 078254056326

Unit Dimensions _____ 9.5H x 4.5W x 2.6D in

Unit Package Description _____ 1 Quart Can

Units per Case _____ 12

VOC % (Consumer Product def) _____ 94.6

VOC % (Federal) _____ 94.6

VOC Category _____ Not Regulated

VOC Lbs./Gal. (Federal) _____ 6.92

VOC g/L (Consumer Product def) _____ 829

VOC g/L (Federal) _____ 829

VOC lbs/gal (Consumer Prod def) _____ 6.92



Part No. 05655

Item# 1003839

CRC® Diesel Cold Flow™ Anti-Gel with Lubricity, 55 Gal

Discontinued

Discontinued product number may still be available for a limited time through your local supplier or retailer.

Description

A highly concentrated formula that inhibits gelling & improves flowability of diesel fuel in cold weather. Lowers the pour point by as much as 40 F. when used in the proper ratios.

Applications

- For Use in Diesel Engines

Appearance _____ Light Amber Liquid

Brand _____ CRC

Color _____ None

DOT Proper Shipping Name _____ Flammable Liquids, N.O.S. (Xylene,
Petroleum Naphtha)

Evaporation Rate _____ Slow

Flammability Class - CPSC _____ Flammable

Flash point (C) _____ 30°C

Flash point (F) _____ 87°F

Generic Description _____ Premium Anti Gel with
Lubricity

Item Number _____ 05655

Net Fill _____ 55 Gal

Plastic Safe _____ No

Pour Point (C) _____ -30.56°C

Pour Point (F) _____ -23°F

Product Lifecycle Status _____ DISC

Propellant _____ None

Removal (How To) _____ Remove with petroleum
distillates.

Specific Gravity _____ 0.88

Treatment Ratio _____ Pre-existing Condition: 55 Gal
treats 27500 Gal, Preventative
Maintenance: 55 Gal treats
55000 Gal

UPC Code _____ 078254056555

Unit Dimensions _____ 35H x 24.5W x 24.5D in

Unit Package Description _____ 55 Gallon Drum

Units per Case _____ 1

VOC % (Consumer Product def) _____ 94.6

VOC % (Federal) _____ 94.6

VOC Category _____ Not Regulated

VOC Lbs./Gal. (Federal) _____ 6.92

VOC g/L (Consumer Product
def) _____ 829

VOC g/L (Federal) _____ 829

VOC lbs/gal (Consumer Prod
def) _____ 6.92



Part No. 05670

Item# 1003841

CRC® Diesel Dry™ Diesel Water Remover, 12 Fl Oz

Discontinued

Discontinued product number may still be available for a limited time through your local supplier or retailer.

Description

Effectively dissipates and removes large amounts of water in diesel fuel to minimize smoke & improve fuel economy. For pre-existing or preventive maintenance in diesel fuel.

Applications

- For Use in Diesel Engines

Appearance Amber Liquid

Brand CRC

Case# 1003840

Color None

DOT Proper Shipping Name Not Regulated by Ground

Evaporation Rate Slow

Flammability Class - CPSC Combustible

Flash point (C) 55.5°C

Flash point (F) 131.9°F

Generic Description Premium Diesel Fuel Water Remover

I 2 of 5 Code 30078254056709

Item Number 05670

Net Fill 12 Fl Oz

Plastic Safe Yes

Product Lifecycle Status DISC

Propellant None

Specific Gravity 0.79

Treatment Ratio Preventative Maintenance: 12 Fl Oz treats 125 Gal, Use one container in every other tankful until problem is eliminated

UPC Code 078254056708

Unit Dimensions 8H x 1.5W x 3D in

Unit Package Description 12 Ounce Bottle

Units per Case 12

VOC % (Consumer Product def) 98.8

VOC % (Federal) 98.8

VOC Category Not Regulated

VOC Lbs./Gal. (Federal) 6.6

VOC g/L (Consumer Product def) 791

VOC g/L (Federal) 791

VOC lbs/gal (Consumer Prod def) 6.6



Part No. 05228

Item# 1003751

CRC® Diesel Fuel Therapy® Diesel Injector Cleaner Plus, 1 Gal

Discontinued

alternate available Product No. 05232 **ITEM# 1003753**

Discontinued product number may still be available for a limited time through your local supplier or retailer.

Description

This emissions reducing formula is rated "SUPERIOR" in Cummins L-10 Test for injector cleanliness. Cleans injectors, adds lubricity, increases power and MPG.

Applications

- For Use in Diesel Engines

Appearance Amber Liquid

Brand CRC

Case# 1003750

Color None

DOT Proper Shipping Name Petroleum Distillates, N.O.S.,
Limited Quantity

Evaporation Rate Slow

Flammability Class - CPSC Combustible

Flash point (C) 66°C

Flash point (F) 151°F

Generic Description Diesel Fuel Conditioner and Injector
Cleaner

I 2 of 5 Code 30078254052282

Item Number 05228

Net Fill 1 Gal

Plastic Safe No

Pour Point (C) -22°C

Pour Point (F) -7.6°F

Product Lifecycle Status DISC

Propellant None

Removal (How To) Remove with petroleum
distillates.

Replacement Legacy Num 05232

Replacement Product SKU 1003753

Specific Gravity 0.84

Treatment Ratio Pre-existing Condition: 1 Gal
treats 200 Gal, Preventative
Maintenance: 1 Gal treats 500
Gal

UPC Code 078254052281

Unit Dimensions 10.25H x 5W x 6.13D in

Unit Package Description 1 Gallon Bottle

Units per Case 4

VOC % (Consumer Product def) 97.2

VOC % (Federal) 97.16

VOC Category Not Regulated

VOC Lbs./Gal. (Federal) 12.6

VOC g/L (Consumer Product
def) 815

VOC g/L (Federal) 1506.6

VOC lbs/gal (Consumer Prod
def) 6.8

Working Temp (C) -22 to 38°C

Working Temp (F) -7.6 to 100°F



Part No. 05212

Item# 1003749

CRC® Diesel Fuel Therapy® Diesel Injector Cleaner Plus, 12 Fl Oz

Discontinued

alternate available Product No. 05232 **ITEM# 1003753**

Discontinued product number may still be available for a limited time through your local supplier or retailer.

Description

This emissions reducing formula is rated "SUPERIOR" in Cummins L-10 Test for injector cleanliness. Cleans injectors, adds lubricity, increases power and MPG.

Applications

- For Use in Diesel Engines

Appearance _____ Dark Amber Liquid

Brand _____ CRC

Case# _____ 1003748

Color _____ None

DOT Proper Shipping Name _____ Petroleum Distillates, N.O.S.,
Limited Quantity

Evaporation Rate _____ Slow

Flammability Class - CPSC _____ Combustible

Flash point (C) _____ 60°C

Flash point (F) _____ 140°F

Generic Description _____ Diesel Fuel Conditioner and Injector
Cleaner

I 2 of 5 Code _____ 30078254052121

Item Number _____ 05212

Net Fill _____ 12 Fl Oz

Plastic Safe _____ No

Pour Point (C) _____ -20°C

Pour Point (F) _____ -4°F

Product Lifecycle Status _____ DISC

Propellant _____ None

Removal (How To) _____ Remove with petroleum
distillates.

Replacement Legacy Num _____ 05232

Replacement Product SKU _____ 1003753

Specific Gravity _____ 0.84

Treatment Ratio _____ Pre-existing Condition: 12 Fl
Oz treats 18 Gal, Preventative
Maintenance: 12 Fl Oz treats
35 Gal

UPC Code _____ 078254052120

Unit Dimensions _____ 7.88H x 2.13W x 3.5D in

Unit Package Description _____ 12 Ounce Bottle

Units per Case _____ 12

VOC % (Consumer Product def) _____ 98

VOC % (Federal) _____ 98

VOC Category _____ Not Regulated

VOC Lbs./Gal. (Federal) _____ 12.7

VOC g/L (Consumer Product
def) _____ 823

VOC g/L (Federal) _____ 1519.6

VOC lbs/gal (Consumer Prod
def) _____ 6.9



Part No. 05232

Item# 1003753

CRC® Diesel Fuel Therapy® Diesel Injector Cleaner Plus, 30 Fl Oz

Description

This emissions reducing formula is rated "SUPERIOR" in Cummins L-10 Test for injector cleanliness. Cleans injectors, adds lubricity, increases power and MPG.

Applications

- For Use in Diesel Engines

Appearance	Amber Liquid	Brand	CRC
Case#	1003752	Color	None
DOT Proper Shipping Name	Not Regulated	Evaporation Rate	Slow
Flammability Class - CPSC	Combustible	Flash point (C)	66°C
Flash point (F)	151°F	Generic Description	Diesel Fuel Conditioner and Injector Cleaner
I 2 of 5 Code	30078254052329	Item Number	05232
Net Fill	30 Fl Oz	Plastic Safe	No
Pour Point (C)	-22°C	Pour Point (F)	-7.6°F
Propellant	None	Removal (How To)	Remove with petroleum distillates.
Specific Gravity	0.84	Treatment Ratio	Pre-existing Condition: 1 Qt treats 50 Gal, Preventative Maintenance: 1 Qt treats 125 Gal
UPC Code	078254052328	Unit Dimensions	9.5H x 4.5W x 2.6D in
Unit Package Description	1 Quart Bottle	Units per Case	12
VOC % (Consumer Product def)	97.2	VOC % (Federal)	97.16
VOC Category	Not Regulated	VOC Lbs./Gal. (Federal)	12.6
VOC g/L (Consumer Product def)	815	VOC g/L (Federal)	1506.6
VOC lbs/gal (Consumer Prod def)	6.8	Working Temp (C)	-22 to 38°C
Working Temp (F)	-7.6 to 100°F		



Part No. 05255

Item# 1003754

CRC® Diesel Fuel Therapy® Diesel Injector Cleaner Plus, 55 Gal

Discontinued

Discontinued product number may still be available for a limited time through your local supplier or retailer.

Description

This emissions reducing formula is rated "SUPERIOR" in Cummins L-10 Test for injector cleanliness. Cleans injectors, adds lubricity, increases power and MPG.

Applications

- For Use in Diesel Engines

Appearance	Amber Liquid	Brand	CRC
Color	None	DOT Proper Shipping Name	Not Regulated (Classified Combustible for Ground Transportation)
Evaporation Rate	Slow	Flammability Class - CPSC	Combustible
Flash point (C)	66°C	Flash point (F)	151°F
Generic Description	Diesel Fuel Conditioner and Injector Cleaner	Item Number	05255
Net Fill	55 Gal	Plastic Safe	No
Pour Point (C)	-22°C	Pour Point (F)	-7.6°F
Product Lifecycle Status	DISC	Propellant	None
Removal (How To)	Remove with petroleum distillates.	Specific Gravity	0.84
Treatment Ratio	Pre-existing Condition: 55 Gal treats 11000 Gal, Preventative Maintenance: 55 Gal treats 27500 Gal	UPC Code	078254052557
Unit Dimensions	35H x 24.5W x 24.5D in	Unit Package Description	55 Gallon Drum
Units per Case	1	VOC % (Consumer Product def)	97.2
VOC % (Federal)	97.16	VOC Category	Not Regulated
VOC Lbs./Gal. (Federal)	12.6	VOC g/L (Consumer Product def)	815
VOC g/L (Federal)	1506.6	VOC lbs/gal (Consumer Prod def)	6.8
Working Temp (C)	-22 to 38°C	Working Temp (F)	-7.6 to 100°F



Part No. 05428

Item# 1003809

CRC® Diesel Fuel Therapy® Diesel Injector Cleaner with Anti-Gel, 1 Gal

Discontinued

alternate available **Product No. 05432** **ITEM# 1003811**

Discontinued product number may still be available for a limited time through your local supplier or retailer.

Description

Top-Tier Cleanup w/max treat. Excellent winter protection. Adds Lubricity to low sulfur fuel. Prevents fuel gelling. Lowers pour point. OK for Biodiesel. Increases MPG. Cleans injectors. Prevents corrosion. Improves power. Reduces smoke. Stabilizes fuel.

Applications

- For Use in Diesel Engines

Appearance _____ Dark Amber Liquid

Brand _____ CRC

Case# _____ 1003808

Color _____ None

DOT Proper Shipping Name _____ Petroleum Distillates, N.O.S.,
Limited Quantity

Evaporation Rate _____ Slow

Flammability Class - CPSC _____ Combustible

Flash point (C) _____ 60°C

Flash point (F) _____ 140°F

Generic Description _____ Diesel Fuel Conditioner with Anti
Gel

I 2 of 5 Code _____ 30078254054286

Item Number _____ 05428

Net Fill _____ 1 Gal

Plastic Safe _____ No

Pour Point (C) _____ -13°C

Pour Point (F) _____ 8.6#176;F

Product Lifecycle Status _____ DISC

Propellant _____ None

Removal (How To) _____ Remove with petroleum
distillates.

Replacement Legacy Num _____ 05432

Replacement Product SKU _____ 1003811

Specific Gravity _____ 0.839

Treatment Ratio _____ Pre-existing Condition: 5 Gal
treats 1000 Gal,Preventative
Maintenance: 5 Gal treats
2500 Gal

UPC Code _____ 078254054285

Unit Dimensions _____ 10.25H x 5W x 6.13D in

Unit Package Description _____ 1 Gallon Bottle

Units per Case _____ 4

VOC % (Consumer Product def) _____ 97.2

VOC % (Federal) _____ 97.17

VOC Category _____ Not Regulated

VOC Lbs./Gal. (Federal) _____ 12.6

VOC g/L (Consumer Product
def) _____ 755.5

VOC g/L (Federal) _____ 1506.7

VOC lbs/gal (Consumer Prod
def) _____ 6.3

Working Temp (C) _____ -13 to 37.8°C

Working Temp (F) _____ 8 to 100°F



Part No. 05425

Item# 1003807

CRC® Diesel Fuel Therapy® Diesel Injector Cleaner with Anti-Gel, 5 Gal

Discontinued

Discontinued product number may still be available for a limited time through your local supplier or retailer.

Description

Top-Tier Cleanup w/max treat. Excellent winter protection. Adds Lubricity to low sulfur fuel. Prevents fuel gelling. Lowers pour point. OK for Biodiesel. Increases MPG. Cleans injectors. Prevents corrosion. Improves power. Reduces smoke. Stabilizes fuel.

Applications

- For Use in Diesel Engines

Appearance _____ Dark Amber Liquid

Brand _____ CRC

Color _____ None

DOT Proper Shipping Name _____ Not Regulated for Ground Transportation

Evaporation Rate _____ Slow

Flammability Class - CPSC _____ Combustible

Flash point (C) _____ 60°C

Flash point (F) _____ 140°F

Generic Description _____ Diesel Fuel Conditioner with Anti Gel

Item Number _____ 05425

Net Fill _____ 5 Gal

Plastic Safe _____ No

Pour Point (C) _____ -13°C

Pour Point (F) _____ 8.6°F

Product Lifecycle Status _____ DISC

Propellant _____ None

Removal (How To) _____ Remove with petroleum distillates.

Specific Gravity _____ 0.839

Treatment Ratio _____ Pre-existing Condition: 5 Gal treats 1000 Gal, Preventative Maintenance: 5 Gal treats 2500 Gal

UPC Code _____ 078254054254

Unit Dimensions _____ 13.8H x 11.3W x 11.3D in

Unit Package Description _____ 5 Gallon Pail

Units per Case _____ 1

VOC % (Consumer Product def) _____ 97.2

VOC % (Federal) _____ 97.17

VOC Category _____ Not Regulated

VOC Lbs./Gal. (Federal) _____ 12.6

VOC g/L (Consumer Product def) _____ 755.5

VOC g/L (Federal) _____ 1506.7

VOC lbs/gal (Consumer Prod def) _____ 6.3

Working Temp (C) _____ -13 to 37.8°C

Working Temp (F) _____ 8 to 100°F



Part No. 05412

Item# 1003806

CRC® Diesel Fuel Therapy® Diesel Injector Cleaner with Anti-Gel, 12 Fl Oz

Discontinued

Discontinued product number may still be available for a limited time through your local supplier or retailer.

Description

Top-Tier Cleanup w/max treat. Excellent winter protection. Adds Lubricity to low sulfur fuel. Prevents fuel gelling. Lowers pour point. OK for Biodiesel. Increases MPG. Cleans injectors. Prevents corrosion. Improves power. Reduces smoke. Stabilizes fuel.

Applications

- For Use in Diesel Engines

Appearance _____ Dark Amber Liquid

Brand _____ CRC

Case# _____ 1003805

Color _____ None

DOT Proper Shipping Name _____ Petroleum Distillates, N.O.S.,
Limited Quantity

Evaporation Rate _____ Slow

Flammability Class - CPSC _____ Combustible

Flash point (C) _____ 60°C

Flash point (F) _____ 140°F

Generic Description _____ Diesel Fuel Conditioner with Anti
Gel

I 2 of 5 Code _____ 30078254054125

Item Number _____ 05412

Net Fill _____ 12 Fl Oz

Plastic Safe _____ No

Pour Point (C) _____ -22°C

Pour Point (F) _____ -7°F

Product Lifecycle Status _____ DISC

Propellant _____ None

Removal (How To) _____ Remove with petroleum
distillates.

Specific Gravity _____ 0.825

Treatment Ratio _____ Pre-existing Condition: 12 Fl
Oz treats 18 Gal
(68L), Preventative
Maintenance: 12 Fl Oz treats 35
Gal (132L)

UPC Code _____ 078254054124

Unit Dimensions _____ 7.88H x 2.13W x 3.5D in

Unit Package Description _____ 12 Ounce Bottle

Units per Case _____ 12

VOC % (Consumer Product def) _____ 98

VOC % (Federal) _____ 98

VOC Category _____ Not Regulated

VOC Lbs./Gal. (Federal) _____ 12.7

VOC g/L (Consumer Product
def) _____ 797

VOC g/L (Federal) _____ 1519.6

VOC lbs/gal (Consumer Prod
def) _____ 6.6

Working Temp (C) _____ -22 to 37°C

Working Temp (F) _____ -7 to 100°F



Part No. 05432

Item# 1003811

CRC® Diesel Fuel Therapy® Diesel Injector Cleaner with Anti-Gel, 30 Fl Oz

Description

Top-Tier Cleanup w/max treat. Excellent winter protection. Adds Lubricity to low sulfur fuel. Prevents fuel gelling. Lowers pour point. OK for Biodiesel. Increases MPG. Cleans injectors. Prevents corrosion. Improves power. Reduces smoke. Stabilizes fuel.

Applications

- For Use in Diesel Engines

Appearance _____ Dark Amber Liquid

Brand _____ CRC

Case# _____ 1003810

Color _____ None

DOT Proper Shipping Name _____ Petroleum Distillates, N.O.S.,
Limited Quantity

Evaporation Rate _____ Slow

Flammability Class - CPSC _____ Combustible

Flash point (C) _____ 60°C

Flash point (F) _____ 140°F

Generic Description _____ Diesel Fuel Conditioner with Anti
Gel

I 2 of 5 Code _____ 30078254054323

Item Number _____ 05432

Net Fill _____ 30 Fl Oz

Plastic Safe _____ No

Pour Point (C) _____ -20.56°C

Pour Point (F) _____ -5°F

Propellant _____ None

Removal (How To) _____ Remove with petroleum distillates.

Specific Gravity _____ 0.839

Treatment Ratio _____ Pre-existing Condition: 5 Gal treats
1000 Gal, Preventative Maintenance:
5 Gal treats 2500 Gal

UPC Code _____ 078254054322

Unit Dimensions _____ 9.5H x 4.5W x 2.6D in

Unit Package Description _____ 1 Quart Bottle

Units per Case _____ 12

VOC % (Consumer Product def) _____ 97.2

VOC % (Federal) _____ 97.17

VOC Category _____ Not Regulated

VOC Lbs./Gal. (Federal) _____ 12.6

VOC g/L (Consumer Product def) _____ 755.5

VOC g/L (Federal) _____ 1506.7

VOC lbs/gal (Consumer Prod def) _____ 6.3

Working Temp (C) _____ -20.6°C

Working Temp (F) _____ -5°F



Part No. 05455

Item# 1003812

CRC® Diesel Fuel Therapy® Diesel Injector Cleaner with Anti-Gel, 55 Gal

Discontinued

Discontinued product number may still be available for a limited time through your local supplier or retailer.

Description

This emissions reducing formula is rated "SUPERIOR" in Cummins L-10 Test for injector cleanliness. Lowers pour point & CFPP, relieves gelled fuel, adds lubricity, increases power and MPG.

Applications

- For Use in Diesel Engines

Appearance _____ Dark Amber Liquid

Brand _____ CRC

Color _____ None

DOT Proper Shipping Name _____ Not Regulated for Ground Transportation

Evaporation Rate _____ Slow

Flammability Class - CPSC _____ Combustible

Flash point (C) _____ 60°C

Flash point (F) _____ 140°F

Generic Description _____ Diesel Fuel Conditioner with Anti Gel

Item Number _____ 05455

Net Fill _____ 55 Gal

Plastic Safe _____ No

Pour Point (C) _____ -13°C

Pour Point (F) _____ 8.6°F

Product Lifecycle Status _____ DISC

Propellant _____ None

Removal (How To) _____ Remove with petroleum distillates.

Specific Gravity _____ 0.839

Treatment Ratio _____ Pre-existing Condition: 5 Gal treats 1000 Gal, Preventative Maintenance: 5 Gal treats 2500 Gal

UPC Code _____ 078254054551

Unit Dimensions _____ 35H x 24.5W x 24.5D in

Unit Package Description _____ 55 Gallon Drum

Units per Case _____ 1

VOC % (Consumer Product def) _____ 97.2

VOC % (Federal) _____ 97.17

VOC Category _____ Not Regulated

VOC Lbs./Gal. (Federal) _____ 12.6


VOC g/L (Consumer Product def) _____ 755.5

VOC g/L (Federal) _____ 1506.7

VOC lbs/gal (Consumer Prod def) _____ 6.3

Working Temp (C) _____ -20.6 to 37.8°C

Working Temp (F) _____ -5 to 100°F

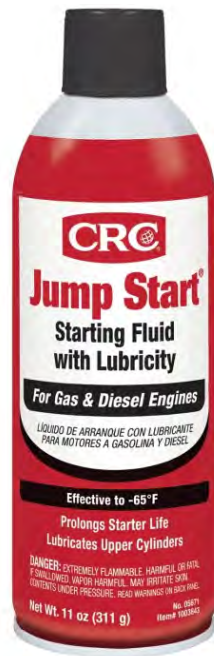

Part No. 05671

Item# 1003843

CRC® Jump Start® Starting Fluid with Lubricity, 11 Wt Oz

Description

Get your stubborn engine running with CRC Jump Start® Starting Fluid with Lubricity. It's the perfect starter fluid solution for starting engines, whether diesel or gasoline fueled. In a variety of weather conditions, including extreme cold or humidity, CRC Jump Start® is effective and safe to apply. Faced with an emergency jump-start? CRC is the solution you need!

Applications

- For Use in Both Gasoline & Diesel Engines Spray in Air Intake or Air Cleaner While Engine is Off

Appearance _____ Clear Liquid

Brand _____ CRC

Case# _____ 1003842

Color _____ None

DOT Proper Shipping Name _____ Aerosols, Flammable, LIMITED
QUANTITY

Evaporation Rate _____ Fast

Flammability Class - CPSC _____ Extremely Flammable

Flash point (C) _____ <-7°C

Flash point (F) _____ <20°F

Ford Tox No. _____ 189537

Generic Description _____ Starting Fluid (Standard
Strength)

I 2 of 5 Code _____ 30078254056716

Item Number _____ 05671

Net Fill _____ 11 Wt Oz

Plastic Safe _____ Yes

Propellant _____ Carbon Dioxide

Specific Gravity _____ 0.7

Treatment Ratio _____ Pre-existing Condition: Not
Applicable, Preventative
Maintenance: Not Applicable

UPC Code _____ 078254056715

Unit Dimensions _____ 7.75H x 2.63W x 2.63D in

Unit Package Description _____ 16 Ounce Aerosol

Units per Case _____ 12

VOC % (Consumer Product def) _____ 97

VOC % (Federal) _____ 94.5

VOC Category _____ Not Regulated

VOC Lbs./Gal. (Federal) _____ 12.2

VOC g/L (Consumer Product def) _____ 679

VOC g/L (Federal) _____ 1465.3

VOC lbs/gal (Consumer Prod def) _____ 5.66



Part No. 05911

Item# 1003870

CRC® Quick Flow™ Emergency Diesel-Gel Relief, 30 Fl Oz

Discontinued

Discontinued product number may still be available for a limited time through your local supplier or retailer.

Description

Emergency Diesel-Gel relief. Quickly dissolves gelled fuel.

Applications

- For Use in Diesel Engines

Appearance _____ Amber Liquid

Brand _____ CRC

Case# _____ 1003869

Color _____ None

DOT Proper Shipping Name _____ Not Regulated (Classified
Combustible for Ground
Transportation)

Evaporation Rate _____ Slow

Flammability Class - CPSC _____ Combustible

Flash point (C) _____ 43°C

Flash point (F) _____ 110°F

Generic Description _____ Emergency Gel Relief

I 2 of 5 Code _____ 30078254059113

Item Number _____ 05911

Net Fill _____ 30 Fl Oz

Plastic Safe _____ No

Pour Point (C) _____ -34.44°C

Pour Point (F) _____ -30°F

Product Lifecycle Status _____ DISC

Propellant _____ None

Removal (How To) _____ Remove with petroleum
distillates.

Specific Gravity _____ 0.78

Treatment Ratio _____ Pre-existing Condition: Not
Applicable, Preventative
Maintenance: 1 Qt treats 125
Gal

UPC Code _____ 078254059112

Unit Dimensions _____ 9.5H x 4.5W x 2.6D in

Unit Package Description _____ 1 Quart Bottle

Units per Case _____ 12

VOC % (Consumer Product def) _____ 98

VOC % (Federal) _____ 97.9

VOC Category _____ Not Regulated

VOC Lbs./Gal. (Federal) _____ 12.7

VOC g/L (Consumer Product
def) _____ 764.4

VOC g/L (Federal) _____ 1518

VOC lbs/gal (Consumer Prod
def) _____ 6.37



Part No. 05558

Item# 1003826

Diesel Bio-Con™ Sludge Sediment Remover, 5 Gal

Discontinued

Discontinued product number may still be available for a limited time through your local supplier or retailer.

Description

Removes sludge sediment in diesel fuels. Disperses moisture. Eliminates corrosion & rust. Eliminates & prevents clogging of injectors. Improves fuel storability. Keeps fuel tank, lines, and filters clean. Prevents injector clogging.

Applications

Appearance Amber Liquid

DOT Proper Shipping Name Not Regulated by Ground

Evaporation Rate Slow

Flammability Class - CPSC Combustible

Flash point (C) 50°C

Flash point (F) 122°F

Generic Description Diesel Fuel Slime Remover

Item Number 05558

Net Fill 5 Gal

Plastic Safe Yes

Product Lifecycle Status DISC

Propellant None

Treatment Ratio Pre-existing Condition: 5 Gal
treats 1000 Gal, Preventative
Maintenance: 5 Gal treats
2000 Gal

UPC Code 078254055589

Unit Dimensions 13.8H x 11.3W x 11.3D in

Unit Package Description 5 Gallon Pail

Units per Case 1

VOC % (Consumer Product def) 45.35

VOC % (Federal) 98.62

VOC Category Not Regulated

VOC Lbs./Gal. (Federal) 12.8

VOC g/L (Consumer Product
def) 390.5

VOC g/L (Federal) 1529.2

VOC lbs/gal (Consumer Prod
def) 3.25

Алматы (727)345-47-04
Ангарск (3955)60-70-56
Архангельск (8182)63-90-72
Астрахань (8512)99-46-04
Барнаул (3852)73-04-60
Белгород (4722)40-23-64
Благовещенск (4162)22-76-07
Брянск (4832)59-03-52
Владивосток (423)249-28-31
Владикавказ (8672)28-90-48
Владимир (4922)49-43-18
Волгоград (844)278-03-48
Вологда (8172)26-41-59
Воронеж (473)204-51-73
Екатеринбург (343)384-55-89

Иваново (4932)77-34-06
Ижевск (3412)26-03-58
Иркутск (395)279-98-46
Казань (843)206-01-48
Калининград (4012)72-03-81
Калуга (4842)92-23-67
Кемерово (3842)65-04-62
Киров (8332)68-02-04
Коломна (4966)23-41-49
Кострома (4942)77-07-48
Краснодар (861)203-40-90
Красноярск (391)204-63-61
Курск (4712)77-13-04
Курган (3522)50-90-47
Липецк (4742)52-20-81

Магнитогорск (3519)55-03-13
Москва (495)268-04-70
Мурманск (8152)59-64-93
Набережные Челны (8552)20-53-41
Нижний Новгород (831)429-08-12
Новокузнецк (3843)20-46-81
Ноябрьск (3496)41-32-12
Новосибирск (383)227-86-73
Омск (3812)21-46-40
Орел (4862)44-53-42
Оренбург (3532)37-68-04
Пенза (8412)22-31-16
Петрозаводск (8142)55-98-37
Псков (8112)59-10-37
Пермь (342)205-81-47

Ростов-на-Дону (863)308-18-15
Рязань (4912)46-61-64
Самара (846)206-03-16
Санкт-Петербург (812)309-46-40
Саратов (845)249-38-78
Севастополь (8692)22-31-93
Саранск (8342)22-96-24
Симферополь (3652)67-13-56
Смоленск (4812)29-41-54
Сочи (862)225-72-31
Ставрополь (8652)20-65-13
Сургут (3462)77-98-35
Сыктывкар (8212)25-95-17
Тамбов (4752)50-40-97
Тверь (4822)63-31-35

Тольятти (8482)63-91-07
Томск (3822)98-41-53
Тула (4872)33-79-87
Тюмень (3452)66-21-18
Ульяновск (8422)24-23-59
Улан-Удэ (3012)59-97-51
Уфа (347)229-48-12
Хабаровск (4212)92-98-04
Чебоксары (8352)28-53-07
Челябинск (351)202-03-61
Череповец (8202)49-02-64
Чита (3022)38-34-83
Якутск (4112)23-90-97
Ярославль (4852)69-52-93

Россия +7(495)268-04-70

Казахстан +7(727)345-47-04

Беларусь +(375)257-127-884

Узбекистан +998(71)205-18-59

Киргизия +996(312)96-26-47

По вопросам продаж и поддержки обращайтесь:

эл.почта: cce@nt-rt.ru || сайт: <https://crc.nt-rt.ru/>