

Другая продукция

Технические характеристики

По вопросам продаж и поддержки обращайтесь:

Алматы (727)345-47-04
Ангарск (3955)60-70-56
Архангельск (8182)63-90-72
Астрахань (8512)99-46-04
Барнаул (3852)73-04-60
Белгород (4722)40-23-64
Благовещенск (4162)22-76-07
Брянск (4832)59-03-52
Владивосток (423)249-28-31
Владикавказ (8672)28-90-48
Владимир (4922)49-43-18
Волгоград (844)278-03-48
Вологда (8172)26-41-59
Воронеж (473)204-51-73
Екатеринбург (343)384-55-89

Иваново (4932)77-34-06
Ижевск (3412)26-03-58
Иркутск (395)279-98-46
Казань (843)206-01-48
Калининград (4012)72-03-81
Калуга (4842)92-23-67
Кемерово (3842)65-04-62
Киров (8332)68-02-04
Коломна (4966)23-41-49
Кострома (4942)77-07-48
Краснодар (861)203-40-90
Красноярск (391)204-63-61
Курск (4712)77-13-04
Курган (3522)50-90-47
Липецк (4742)52-20-81

Магнитогорск (3519)55-03-13
Москва (495)268-04-70
Мурманск (8152)59-64-93
Набережные Челны (8552)20-53-41
Нижний Новгород (831)429-08-12
Новокузнецк (3843)20-46-81
Ноябрьск (3496)41-32-12
Новосибирск (383)227-86-73
Омск (3812)21-46-40
Орел (4862)44-53-42
Оренбург (3532)37-68-04
Пенза (8412)22-31-16
Петрозаводск (8142)55-98-37
Псков (8112)59-10-37
Пермь (342)205-81-47

Ростов-на-Дону (863)308-18-15
Рязань (4912)46-61-64
Самара (846)206-03-16
Санкт-Петербург (812)309-46-40
Саратов (845)249-38-78
Севастополь (8692)22-31-93
Саранск (8342)22-96-24
Симферополь (3652)67-13-56
Смоленск (4812)29-41-54
Сочи (862)225-72-31
Ставрополь (8652)20-65-13
Сургут (3462)77-98-35
Сыктывкар (8212)25-95-17
Тамбов (4752)50-40-97
Тверь (4822)63-31-35

Тольятти (8482)63-91-07
Томск (3822)98-41-53
Тула (4872)33-79-87
Тюмень (3452)66-21-18
Ульяновск (8422)24-23-59
Улан-Удэ (3012)59-97-51
Уфа (347)229-48-12
Хабаровск (4212)92-98-04
Чебоксары (8352)28-53-07
Челябинск (351)202-03-61
Череповец (8202)49-02-64
Чита (3022)38-34-83
Якутск (4112)23-90-97
Ярославль (4852)69-52-93

Россия +7(495)268-04-70

Казахстан +7(727)345-47-04

Беларусь +(375)257-127-884

Узбекистан +998(71)205-18-59

Киргизия +996(312)96-26-47

эл.почта: cse@nt-rt.ru || сайт: <https://crc.nt-rt.ru/>



Part No. 14503

Item# 1004997

CRC® Aerosol Leak Detector, 18 Wt Oz

Description

Formulated for the quick and easy site detection of gas leaks and air leaks. The water-based formula contains no oils, silicones or harmful solvents.

Applications

- Refrigeration Units
- Exhausts
- Valves
- Welding Seams
- Air Conditioning Systems
- Pipes
- Screw Connectors
- Compressors

Appearance _____ Clear Colorless Liquid

Brand _____ CRC

Case# _____ 1004996

DOT Proper Shipping Name _____ Aerosols, Non-Flammable, Limited
Quantity

Evaporation Rate _____ Slow

Flammability Class - CPSC _____ None

Flash point (C) _____ None

Flash point (F) _____ None

Generic Description _____ Leak Detector

I 2 of 5 Code _____ 30078254145038

Item Number _____ 14503

NSF Category Code _____ P1

NSF Number _____ 142410

Net Fill _____ 18 Wt Oz

PH _____ 10.4

Plastic Safe _____ Safe on Most Plastics (Test small
area)

Propellant _____ HFC-152A

Removal (How To) _____ Remove with water.

Specific Gravity _____ 1

UPC Code _____ 078254145037

Unit Dimensions _____ 9.25H x 2.63W x 2.63D in

Unit Package Description _____ 20 Ounce Aerosol

Units per Case _____ 12

VOC % (Consumer Product def) _____ 5.3

VOC % (Federal) _____ 5.31

VOC Category _____ Not Regulated

VOC Lbs./Gal. (Federal) _____ 0.69

VOC g/L (Consumer Product
def) _____ 52.6

VOC g/L (Federal) _____ 82.3

VOC lbs/gal (Consumer Prod
def) _____ 0.44



Part No. 05346

Item# 1003777

CRC® Ice-Off® Windshield Spray De-Icer, 12 Wt Oz

Description

Melts ice, snow, and frost on contact. Harmless to car finish. Thaws frozen locks and is effective to sub-zero temperatures.

Applications

- Automobiles
- Locks
- Headlights
- Windows

Appearance _____ Colorless Liquid

Brand _____ CRC

Case# _____ 1003776

Color _____ None

DOT Proper Shipping Name _____ Aerosols, Flammable, Limited
Quantity

Evaporation Rate _____ Fast

Flammability Class - CPSC _____ Flammable

Flash point (C) _____ 12°C

Flash point (F) _____ 54°F

Ford Tox No. _____ 190320

Generic Description _____ Windshield Spray De-Icer

I 2 of 5 Code _____ 30078254053463

Item Number _____ 05346

Net Fill _____ 12 Wt Oz

Plastic Safe _____ Yes

Propellant _____ Carbon Dioxide

Specific Gravity _____ 0.81

UPC Code _____ 078254053462

Unit Dimensions _____ 7.75H x 2.63W x 2.63D in

Unit Package Description _____ 16 Ounce Aerosol

Units per Case _____ 12

VOC % (Consumer Product def) _____ 89.9

VOC % (Federal) _____ 88.8


VOC Category _____ Not Regulated

VOC Lbs./Gal. (Federal) _____ 11.5

VOC g/L (Consumer Product
def) _____ 755.2

VOC g/L (Federal) _____ 1376.9

VOC lbs/gal (Consumer Prod
def) _____ 6.3

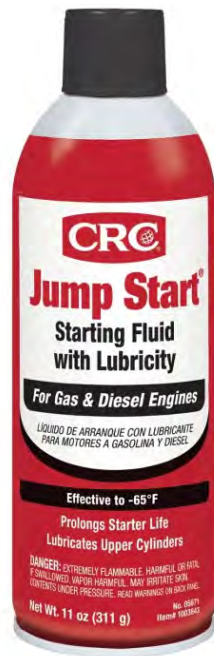

Part No. 05671

Item# 1003843

CRC® Jump Start® Starting Fluid with Lubricity, 11 Wt Oz

Description

Get your stubborn engine running with CRC Jump Start® Starting Fluid with Lubricity. It's the perfect starter fluid solution for starting engines, whether diesel or gasoline fueled. In a variety of weather conditions, including extreme cold or humidity, CRC Jump Start® is effective and safe to apply. Faced with an emergency jump-start? CRC is the solution you need!

Applications

- For Use in Both Gasoline & Diesel Engines Spray in Air Intake or Air Cleaner While Engine is Off

Appearance _____ Clear Liquid

Brand _____ CRC

Case# _____ 1003842

Color _____ None

DOT Proper Shipping Name _____ Aerosols, Flammable, LIMITED
QUANTITY

Evaporation Rate _____ Fast

Flammability Class - CPSC _____ Extremely Flammable

Flash point (C) _____ <-7°C

Flash point (F) _____ <20°F

Ford Tox No. _____ 189537

Generic Description _____ Starting Fluid (Standard
Strength)

I 2 of 5 Code _____ 30078254056716

Item Number _____ 05671

Net Fill _____ 11 Wt Oz

Plastic Safe _____ Yes

Propellant _____ Carbon Dioxide

Specific Gravity _____ 0.7

Treatment Ratio _____ Pre-existing Condition: Not
Applicable, Preventative
Maintenance: Not Applicable

UPC Code _____ 078254056715

Unit Dimensions _____ 7.75H x 2.63W x 2.63D in

Unit Package Description _____ 16 Ounce Aerosol

Units per Case _____ 12

VOC % (Consumer Product def) _____ 97

VOC % (Federal) _____ 94.5

VOC Category _____ Not Regulated

VOC Lbs./Gal. (Federal) _____ 12.2

VOC g/L (Consumer Product def) _____ 679

VOC g/L (Federal) _____ 1465.3

VOC lbs/gal (Consumer Prod def) _____ 5.66



Part No. 14089

Item# 1004826

CRC® Perma-Mend™ UV Curable Repair Patch

Discontinued

Discontinued product number may still be available for a limited time through your local supplier or retailer.

Description

Light activated fiberglass reinforced self adhesive repair patch.

Applications

- Repair of Tanks
- Roofs
- Switch Boxes
- Mufflers
- Boat Bodies Can Be Used on Any Wood
- Glass
- Concrete and Plastic Surface
- Pipes
- Steps
- Radiators
- Bumpers
- Metal
- Ceramic

Appearance _____ Grey Sheet Lamination

Brand _____ CRC

Case Weight _____ 0.0 lbs

Case# _____ 1004825

Color _____ None

Curing Time _____ 5 Minutes (Sunny), 50 Minutes (Cloudy)

DOT Proper Shipping Name _____ Not Regulated

Dielectric Strength _____ 9 kV/mm

Dry Time Fully Dry _____ 50 Minutes

Dry Time Tack Free _____ 5 Minutes (Sunny) | 50 Minutes (Cloudy)

Evaporation Rate _____ None

Film Thickness _____ 0.6 to 0.7 inches

Film Type _____ Laminate

Flammability Class - CPSC _____ None

Flash point (C) _____ 449°C

Flash point (F) _____ 840°F

Generic Description _____ Repair Patch

I 2 of 5 Code _____ 30078254140897

Item Number _____ 14089

Net Fill _____ 3" x 6"

Plastic Safe _____ Yes

Product Lifecycle Status _____ DISC

UPC Code _____ 078254140896

Unit Dimensions _____ 3H x 6W

Unit Package Description _____ 3" x 6" Patch

Units per Case _____ 12

VOC % (Consumer Product def) _____ 0.6

VOC % (Federal) _____ 0.6

VOC Category _____ Not Regulated

VOC Lbs./Gal. (Federal) _____ 0.08

VOC g/L (Federal) _____ 9.3

Working Temp (C) _____ -40 to 200°C

Working Temp (F) _____ -40 to 392°F



Part No. 14094

Item# 1004828

CRC® Perma-Mend™ UV Curable Repair Patch

Discontinued

Discontinued product number may still be available for a limited time through your local supplier or retailer.

Description

Light activated fiberglass reinforced self adhesive repair patch.

Applications

- Repair of Tanks
- Roofs
- Switch Boxes
- Mufflers
- Boat Bodies Can Be Used on Any Wood
- Glass
- Concrete and Plastic Surface
- Pipes
- Steps
- Radiators
- Bumpers
- Metal
- Ceramic

Appearance _____ Grey Sheet Lamination

Brand _____ CRC

Case# _____ 1004827

Color _____ None

Curing Time _____ 5 Minutes (Sunny),50 Minutes
(Cloudy)

DOT Proper Shipping Name _____ Not Regulated

Dielectric Strength _____ 9 kV/mm

Dry Time Fully Dry _____ 50 Minutes

Dry Time Tack Free _____ 5 Minutes (Sunny)|50 Minutes
(Cloudy)

Evaporation Rate _____ None

Film Thickness _____ 0.6 to 0.7 inches

Film Type _____ Laminate

Flammability Class - CPSC _____ None

Flash point (C) _____ 449°C

Flash point (F) _____ 840°F

Generic Description _____ Repair Patch

I 2 of 5 Code _____ 30078254140941

Item Number _____ 14094

Net Fill _____ 6" x 9"

Plastic Safe _____ Yes

Product Lifecycle Status _____ DISC

UPC Code _____ 078254140940

Unit Dimensions _____ 6H x 9W

Unit Package Description _____ 6" x 9" Patch

Units per Case _____ 12

VOC % (Consumer Product def) _____ 0.6

VOC % (Federal) _____ 0.6

VOC Category _____ Not Regulated

VOC Lbs./Gal. (Federal) _____ 0.08

VOC g/L (Federal) _____ 9.3

Working Temp (C) _____ -40 to 200°C

Working Temp (F) _____ -40 to 392°F



Part No. 14096

Item# 1004832

CRC® Perma-Mend™ UV Curable Repair Patch

Discontinued

Discontinued product number may still be available for a limited time through your local supplier or retailer.

Description

Light activated fiberglass reinforced self adhesive repair patch.

Applications

- Repair of Tanks
- Roofs
- Switch Boxes
- Mufflers
- Boat Bodies Can Be Used on Any Wood
- Glass
- Concrete
- Pipes
- Steps
- Radiators
- Bumpers
- Metal
- Ceramic
- Plastic Surface

Appearance _____ Grey Sheet Lamination

Brand _____ CRC

Case# _____ 1004831

Color _____ None

Curing Time _____ 5 Minutes (Sunny),50 Minutes
(Cloudy)

DOT Proper Shipping Name _____ Not Regulated

Dielectric Strength _____ 9 kV/mm

Dry Time Fully Dry _____ 50 Minutes

Dry Time Tack Free _____ 5 Minutes (Sunny)|50 Minutes
(Cloudy)

Evaporation Rate _____ None

Film Thickness _____ 0.6 to 0.7 inches

Film Type _____ Laminate

Flammability Class - CPSC _____ None

Flash point (C) _____ 449°C

Flash point (F) _____ 840°F

Generic Description _____ Repair Patch

I 2 of 5 Code _____ 30078254140965

Item Number _____ 14096

Net Fill _____ 9" x 12"

Plastic Safe _____ Yes

Product Lifecycle Status _____ DISC

UPC Code _____ 078254140964

Unit Dimensions _____ 9H x 12W

Unit Package Description _____ 9" x 12" Patch

Units per Case _____ 12

VOC % (Consumer Product def) _____ 0.6

VOC % (Federal) _____ 0.6

VOC Category _____ Not Regulated

VOC Lbs./Gal. (Federal) _____ 0.08

VOC g/L (Federal) _____ 9.3

Working Temp (C) _____ -40 to 200°C

Working Temp (F) _____ -40 to 392°F



Part No. 14098

Item# 1004835

CRC® Perma-Mend™, 1 UV Light

Discontinued

Discontinued product number may still be available for a limited time through your local supplier or retailer.

Description

UV Light for the curing of Perma-Mend™ UV Curable Repair Patches. LED 51 Ultraviolet. LED 390 bulb type. 10,000 hours bulb life. 3xAA Alkaline batteries required (Not Included). Push on/off switch type, polycarbonate lens material, single light output mode, body material is aluminum with "O" rings for water resistance.

Applications

- Perma-Mend™ Repair Patches

Brand _____ CRC

Case# _____ 1004834

Color _____ None

DOT Proper Shipping Name _____ Not Regulated

Generic Description _____ UV Light

I 2 of 5 Code _____ 30078254140989

Item Number _____ 14098

Net Fill _____ 1 Literight

Product Lifecycle Status _____ DISC

UPC Code _____ 078254140988

Unit Dimensions _____ 6H x 2.38W x 2.38D in

Unit Package Description _____ 1 Light

Units per Case _____ 1

VOC Category _____ Not Regulated



Part No. 02105

Item# 1003205

CRC® Smoke Test® Brand Smoke Detector Tester, 2.5 Wt Oz

Description

Convenient, easy & safe product to test the functional ability of a smoke detector. It also checks for obstructions or debris which clog detector vents & prevent smoke from properly entering the sensing chamber. Safe for use on Photoelectric and ionization type detectors.

Applications

- to Test The Functional Ability of Commercial or Residential Smoke Detectors

Appearance	Dispensed - Smoky Mist, Packaged - Water-White Liquid	Brand	CRC
Case#	1003204	DOT Proper Shipping Name	Aerosols, Flammable, Limited Quantity
Dry Time Fully Dry	1 Minute	Evaporation Rate	Very Fast
Flammability Class - CPSC	Extremely Flammable	Flash point (C)	13°C
Flash point (F)	56°F	Generic Description	Smoke Detector Tester
I 2 of 5 Code	30078254021059	Item Number	02105
Net Fill	2.5 Wt Oz	Plastic Safe	Yes
Propellant	Hydrocarbon	Specific Gravity	0.82
UPC Code	078254021058	Unit Dimensions	5.5H x 2W x 2D in
Unit Package Description	6 Ounce Aerosol	Units per Case	12
VOC % (Consumer Product def)	97.5	VOC % (Federal)	97.5
VOC Category	Not Regulated	VOC Lbs./Gal. (Federal)	12.6
VOC g/L (Consumer Product def)	796.6	VOC g/L (Federal)	1511.8
VOC lbs/gal (Consumer Prod def)	6.64		



Part No. 14193

Item# 1004869

Deluxe Floor Display Rack

Description

Deluxe floor display rack with 5 shelves, gravity-fed. 84"H x 25"W x 18"L and includes header. (Rack shown with lockable wheels, part number 14322)

Applications

Brand CRC

Case Weight 56 lbs

Color None

Generic Description Deluxe Floor Display Rack

I 2 of 5 Code 30078254141931

Item Number 14193

UPC Code 078254141930

Unit Dimensions 6H x 17W x 17D in

Unit Package Description 84H x 25W x 18L in includes header

Units per Case 1

Part No. 401118

Item# 1006060

K&W® Air & Gas Leak Detector, 18 Wt Oz

Discontinued

Discontinued product number may still be available for a limited time through your local supplier or retailer.

Description

Formulated for the quick and easy site detection of gas leaks and air leaks. The water-based formula contains no oils, silicones or harmful solvents.

Applications

- Tire Leaks
- Refrigeration Units
- Exhausts
- Valves
- Welding Seams
- Hose Leaks
- Air Conditioning Systems
- Pipes
- Screw Connectors
- Compressors

Appearance Clear Colorless Liquid

Brand K&W

Case# 1006059

DOT Proper Shipping Name Aerosols, Non-Flammable, Limited Quantity

Evaporation Rate Slow

Flammability Class - CPSC None

Flash point (C) None

Flash point (F) None

Generic Description Leak Detector

I 2 of 5 Code 10078372011181

Item Number 401118

NSF Category Code P1

NSF Number 142410

Net Fill 18 Wt Oz

PH 10.4

Plastic Safe Safe on Most Plastics (Test small area)

Product Lifecycle Status DISC

Propellant HFC-152A

Removal (How To) Remove with water.

Specific Gravity 1

UPC Code 078372011184

Unit Dimensions 9.25H x 2.63W x 2.63D in

Unit Package Description 20 Ounce Aerosol

Units per Case 12

VOC % (Consumer Product def) 5.3

VOC % (Federal) 5.31

VOC Category Not Regulated

VOC Lbs./Gal. (Federal) 0.69

VOC g/L (Consumer Product def) 53

VOC g/L (Federal) 82.3

VOC lbs/gal (Consumer Prod def) 0.44



Part No. 401612

Item# 1006077

K&W® Copper Coat® Aerosol, 9 Wt Oz

Description

High temperature, high quality aerosol metallic gasket sealer. Prevents compression loss on premium gaskets. Ideal for head and intake gaskets.

Applications

- Automatic Transmissions
- Diesel Heads
- Hi-Speed Turbine Superchargers
- Cover Plates
- High Compression Engines
- Hydraulic Pumps

Appearance _____ Copper Liquid

Brand _____ K&W

Case# _____ 1006076

Curing Time _____ Not Determined

DOT Proper Shipping Name _____ AEROSOLS, FLAMMABLE,
LIMITED QUANTITY

Dry Time Fully Dry _____ 1 to 2 minutes

Evaporation Rate _____ Not Determined

Film Type _____ Tacky

Flammability Class - CPSC _____ Extremely Flammable

Flash point (C) _____ -20 °C

Flash point (F) _____ -4 °F

Generic Description _____ Gasket Compound

I 2 of 5 Code _____ 10078372016124

Item Number _____ 401612

Net Fill _____ 9 Wt Oz

Plastic Safe _____ Yes

Propellant _____ Hydrocarbon

Removal (How To) _____ Gasket remover

Specific Gravity _____ 0.74

UPC Code _____ 078372016127

Unit Dimensions _____ 7.68H x 2.27W x 2.27D in

Unit Package Description _____ 12 Ounce Aerosol

Units per Case _____ 12

VOC % (Consumer Product def) _____ 54.23

VOC % (Federal) _____ 54.22

VOC Category _____ Automotive Engine Compartment
Spray Adhesive

VOC Lbs./Gal. (Federal) _____ 7

VOC g/L (Consumer Product
def) _____ 399

VOC g/L (Federal) _____ 840.7

VOC lbs/gal (Consumer Prod
def) _____ 3.33

Working Temp (C) _____ -62.2 to 204.4°C

Working Temp (F) _____ -80 to 400°F



Part No. 401504

Item# 1006075

K&W® Copper Coat® Gasket Compound, 4 Fl Oz

Discontinued

Discontinued product number may still be available for a limited time through your local supplier or retailer.

Description

High temperature, high quality gasket sealer. Prevents compression loss on paper, cork and premium gaskets. Dauber built into the lid for easy application and storage.

Applications

- Automatic Transmissions
- Diesel Heads
- Hi-Speed Turbine Superchargers
- Cover Plates
- High Compression Engines
- Hydraulic Pumps

Appearance _____ Viscous Copper Liquid

Case# _____ 1006074

Evaporation Rate _____ Moderate

Flammability Class - CPSC _____ Flammable

Flash point (F) _____ 30°F

I 2 of 5 Code _____ 10078372015042

Net Fill _____ 4 Fl Oz

Product Lifecycle Status _____ DISC

Removal (How To) _____ Gasket remover

UPC Code _____ 078372015045

Unit Package Description _____ 4 ounce Brush Top Bottle

VOC % (Consumer Product def) _____ 74.2

VOC Category _____ Not Regulated

VOC g/L (Consumer Product def) _____ 549

VOC lbs/gal (Consumer Prod def) _____ 4.57

Working Temp (F) _____ -80 to 400°F

Brand _____ K&W

DOT Proper Shipping Name _____ Heptanes mixture, Limited Quantity

Film Type _____ Wet to tacky

Flash point (C) _____ -1.1°C

Generic Description _____ Gasket Compound

Item Number _____ 401504

Plastic Safe _____ Yes

Propellant _____ None

Specific Gravity _____ 0.74

Unit Dimensions _____ 2.75H x 2.5W x 2.5D in


Units per Case _____ 12

VOC % (Federal) _____ 74.15

VOC Lbs./Gal. (Federal) _____ 9.6

VOC g/L (Federal) _____ 1149.8

Working Temp (C) _____ -62.2 to 204.4°C

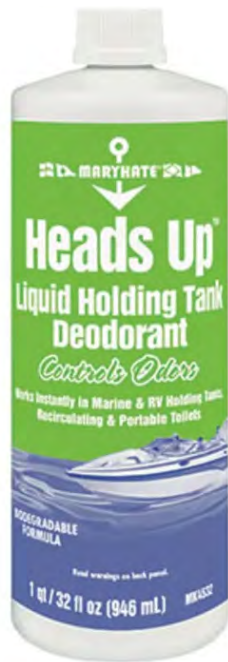

Part No. MK4532

Item# 1007612

MaryKate® Heads Up™ Liquid Holding Tank Deodorant, 32 Fl Oz

Discontinued

Discontinued product number may still be available for a limited time through your local supplier or retailer.

Description

Works instantly to control odors. Long lasting pleasant fragrance. Helps keep holding tanks and recirculating and portable toilets clean and breaks down waste and tissue. Non-formaldehyde formula.

Applications

- Holding Tanks
- Recirculating and Portable Toilets

Appearance ————— Blue Thin Liquid

Case# ————— 1007611

Evaporation Rate ————— Similar to Water

Flash point (C) ————— None

Generic Description ————— Liquid Holding Tank Deodorant

Item Number ————— MK4532

PH ————— 5 to 8

Product Lifecycle Status ————— DISC

Specific Gravity ————— 1

Unit Dimensions ————— 8.88H x 3.25W x 3.25D in

Units per Case ————— 12

VOC % (Federal) ————— <1

VOC Lbs./Gal. (Federal) ————— <0.13

VOC g/L (Federal) ————— <15.5

Brand ————— MaryKate

DOT Proper Shipping Name ————— Not Regulated

Flammability Class - CPSC ————— None

Flash point (F) ————— None

I 2 of 5 Code ————— 30716606045321

Net Fill ————— 32 Fl Oz

Plastic Safe ————— Yes

Propellant ————— None

UPC Code ————— 716606045320

Unit Package Description ————— 1 Quart Bottle

VOC % (Consumer Product def) ————— 0.5

VOC Category ————— Not Regulated

VOC g/L (Consumer Product def) ————— 5

VOC lbs/gal (Consumer Prod def) ————— 0.04



Part No. MK6810

Item# 1007631

MaryKate® Liquid Rollers® Trailer Bunk Boards Lubricant, 10 Wt Oz

Discontinued

Discontinued product number may still be available for a limited time through your local supplier or retailer.

Description

Makes the loading & unloading of boats easy. Dramatically reduces friction to make bunk boards as slick as rollers. Long-lasting, non-greasy, non-staining formula. Repels road dirt & grime.

Applications

- Trailer Bunk Boards

Appearance Clear Colorless Liquid

Brand MaryKate

Case# 1007630

DOT Proper Shipping Name Aerosols, Flammable, Limited Quantity

Dielectric Strength 350 Volts/Mil

Evaporation Rate Fast

Film Thickness Non-Drying

Film Type Clear Non-Drying

Flammability Class - CPSC Extremely Flammable

Flash point (C) <-18°C

Flash point (F) <0°F

Generic Description Trailer Bunk Board Lubricant

I 2 of 5 Code 30716606068108

Item Number MK6810

Net Fill 10 Wt Oz

Plastic Safe Yes

Product Lifecycle Status DISC

Propellant Hydrocarbon

Removal (How To) Remove with soap & water, CRC HydroForce® All Purpose, etc. and elbow power (scrubbing).

Specific Gravity 0.6694

UPC Code 716606068107

Unit Dimensions 7.75H x 2.63W x 2.63D in

Unit Package Description 16 Ounce Aerosol

Units per Case 12

VOC % (Consumer Product def) 97

VOC % (Federal) 96.98

VOC Category Not Regulated (Single Purpose Lubricant)

VOC Lbs./Gal. (Federal) 12.5

VOC g/L (Consumer Product def) 649.9

VOC g/L (Federal) 1503.8

VOC lbs/gal (Consumer Prod def) 5.4

Working Temp (C) -40 to 204.4°C

Working Temp (F) -40 to 400°F



Part No. MK6912

Item# 1007633

MaryKate® Moisture Absorber, 12 Wt Oz

Discontinued

Discontinued product number may still be available for a limited time through your local supplier or retailer.

Description

Dries air in cabins, lockers, closets, bathrooms, basements, & other enclosed areas. Concentrated pellet formula absorbs up to 50% more moisture than flake formulas.

Applications

- Dries Air in Cabins
- Lockers
- Closets
- Bathrooms
- Basements
- Enclosed Areas

Appearance _____ White Granular Pellets

Brand _____ MaryKate

Case# _____ 1007632

DOT Proper Shipping Name _____ Not Regulated

Flammability Class - CPSC _____ None

Generic Description _____ Moisture Absorber

I 2 of 5 Code _____ 30716606069129

Item Number _____ MK6912

Net Fill _____ 12 Wt Oz

Plastic Safe _____ Yes

Product Lifecycle Status _____ DISC

Propellant _____ None

Specific Gravity _____ 2.2

UPC Code _____ 716606069128

Unit Dimensions _____ 3.44H x 4.13W x 4.13D in

Unit Package Description _____ 12 Ounce Tub

Units per Case _____ 12

VOC % (Consumer Product def) _____ 0

VOC % (Federal) _____ 0

VOC Category _____ Not Regulated

VOC Lbs./Gal. (Federal) _____ 0

VOC g/L (Consumer Product def) _____ 0

VOC g/L (Federal) _____ 0

VOC lbs/gal (Consumer Prod def) _____ 0



Part No. 14162

Item# 1004859

SmartWasher® SW-37 Mobile Heavyweight Parts Washer

Description

An alternative to conventional petroleum-based parts washing systems. This bioremediating unit eliminates the expense and liability of hazardous waste removal. No flash point, no toxic solvents and no caustic materials while remaining intensely powerful. For information on spare parts and technical support please contact CRC Technical

Applications

Parts Cleaning in

- Preventative Maintenance & Repair Facilities
- Automotive Repair Shops
- Industrial Manufacturing Plants
- Metal Fabricators

Appearance 48" x 35" x 45" (overall dimensions) HDPE

Brand SmartWasher

Color None

DOT Proper Shipping Name Not Regulated

Generic Description Parts Washer

Item Number 14162

Net Fill 1 Unit

UPC Code 649123001268

Unit Dimensions 35.5H x 40W x 26.5D in

Unit Package Description 1 Unit

Units per Case 1

VOC Category Not Regulated



Part No. 402015

Item# 1006088

CRC® Trans-X® Automatic Transmission Stop Leak & Tune-Up, 15 Fl Oz

Description

Effectively repairs leaks in automatic transmissions, power steering & hydraulic systems. Prevents leaks caused by aged seals & gaskets. Powerful cleaning agents remove sludge, gums, & varnish to prevent premature failure and extends transmission life. Not compatible with CVT transmissions fluids.

Applications

- For Use in Power Steering & Transmission Fluids

Appearance _____ Clear Red Liquid

Brand _____ CRC

Case# _____ 1006089

DOT Proper Shipping Name _____ Flammable Liquids, N.O.S.
(Isopropanol, xylene), Limited
Quantity

Evaporation Rate _____ Slow

Flammability Class - CPSC _____ Flammable

Flash point (C) _____ 16°C

Flash point (F) _____ 61°F

Generic Description _____ Stop Leak and Tune Up

I 2 of 5 Code _____ 60078372020157

Item Number _____ 402015

Net Fill _____ 15 Fl Oz

Plastic Safe _____ Yes

Propellant _____ None

Specific Gravity _____ 0.875

UPC Code _____ 078372020155

Unit Dimensions _____ 7.5H x 1.75W x 3.13D in

Unit Package Description _____ 16 Ounce Bottle

Units per Case _____ 12

VOC % (Consumer Product def) _____ 23.8

VOC % (Federal) _____ 99.92

VOC Category _____ Not Regulated

VOC Lbs./Gal. (Federal) _____ 12.9

VOC g/L (Consumer Product
def) _____ 368.6

VOC g/L (Federal) _____ 1549.4

VOC lbs/gal (Consumer Prod
def) _____ 3.1

Алматы (727)345-47-04
Ангарск (3955)60-70-56
Архангельск (8182)63-90-72
Астрахань (8512)99-46-04
Барнаул (3852)73-04-60
Белгород (4722)40-23-64
Благовещенск (4162)22-76-07
Брянск (4832)59-03-52
Владивосток (423)249-28-31
Владикавказ (8672)28-90-48
Владимир (4922)49-43-18
Волгоград (844)278-03-48
Вологда (8172)26-41-59
Воронеж (473)204-51-73
Екатеринбург (343)384-55-89

Иваново (4932)77-34-06
Ижевск (3412)26-03-58
Иркутск (395)279-98-46
Казань (843)206-01-48
Калининград (4012)72-03-81
Калуга (4842)92-23-67
Кемерово (3842)65-04-62
Киров (8332)68-02-04
Коломна (4966)23-41-49
Кострома (4942)77-07-48
Краснодар (861)203-40-90
Красноярск (391)204-63-61
Курск (4712)77-13-04
Курган (3522)50-90-47
Липецк (4742)52-20-81

Магнитогорск (3519)55-03-13
Москва (495)268-04-70
Мурманск (8152)59-64-93
Набережные Челны (8552)20-53-41
Нижний Новгород (831)429-08-12
Новокузнецк (3843)20-46-81
Ноябрьск (3496)41-32-12
Новосибирск (383)227-86-73
Омск (3812)21-46-40
Орел (4862)44-53-42
Оренбург (3532)37-68-04
Пенза (8412)22-31-16
Петрозаводск (8142)55-98-37
Псков (8112)59-10-37
Пермь (342)205-81-47

Ростов-на-Дону (863)308-18-15
Рязань (4912)46-61-64
Самара (846)206-03-16
Санкт-Петербург (812)309-46-40
Саратов (845)249-38-78
Севастополь (8692)22-31-93
Саранск (8342)22-96-24
Симферополь (3652)67-13-56
Смоленск (4812)29-41-54
Сочи (862)225-72-31
Ставрополь (8652)20-65-13
Сургут (3462)77-98-35
Сыктывкар (8212)25-95-17
Тамбов (4752)50-40-97
Тверь (4822)63-31-35

Тольятти (8482)63-91-07
Томск (3822)98-41-53
Тула (4872)33-79-87
Тюмень (3452)66-21-18
Ульяновск (8422)24-23-59
Улан-Удэ (3012)59-97-51
Уфа (347)229-48-12
Хабаровск (4212)92-98-04
Чебоксары (8352)28-53-07
Челябинск (351)202-03-61
Череповец (8202)49-02-64
Чита (3022)38-34-83
Якутск (4112)23-90-97
Ярославль (4852)69-52-93

Россия +7(495)268-04-70

Казахстан +7(727)345-47-04

Беларусь +(375)257-127-884

Узбекистан +998(71)205-18-59

Киргизия +996(312)96-26-47

По вопросам продаж и поддержки обращайтесь:

эл.почта: cce@nt-rt.ru || сайт: <https://crc.nt-rt.ru/>