

Клеи

Технические характеристики

По вопросам продаж и поддержки обращайтесь:

Алматы (727)345-47-04
Ангарск (3955)60-70-56
Архангельск (8182)63-90-72
Астрахань (8512)99-46-04
Барнаул (3852)73-04-60
Белгород (4722)40-23-64
Благовещенск (4162)22-76-07
Брянск (4832)59-03-52
Владивосток (423)249-28-31
Владикавказ (8672)28-90-48
Владимир (4922)49-43-18
Волгоград (844)278-03-48
Вологда (8172)26-41-59
Воронеж (473)204-51-73
Екатеринбург (343)384-55-89

Иваново (4932)77-34-06
Ижевск (3412)26-03-58
Иркутск (395)279-98-46
Казань (843)206-01-48
Калининград (4012)72-03-81
Калуга (4842)92-23-67
Кемерово (3842)65-04-62
Киров (8332)68-02-04
Коломна (4966)23-41-49
Кострома (4942)77-07-48
Краснодар (861)203-40-90
Красноярск (391)204-63-61
Курск (4712)77-13-04
Курган (3522)50-90-47
Липецк (4742)52-20-81

Магнитогорск (3519)55-03-13
Москва (495)268-04-70
Мурманск (8152)59-64-93
Набережные Челны (8552)20-53-41
Нижний Новгород (831)429-08-12
Новокузнецк (3843)20-46-81
Ноябрьск (3496)41-32-12
Новосибирск (383)227-86-73
Омск (3812)21-46-40
Орел (4862)44-53-42
Оренбург (3532)37-68-04
Пенза (8412)22-31-16
Петрозаводск (8142)55-98-37
Псков (8112)59-10-37
Пермь (342)205-81-47

Ростов-на-Дону (863)308-18-15
Рязань (4912)46-61-64
Самара (846)206-03-16
Санкт-Петербург (812)309-46-40
Саратов (845)249-38-78
Севастополь (8692)22-31-93
Саранск (8342)22-96-24
Симферополь (3652)67-13-56
Смоленск (4812)29-41-54
Сочи (862)225-72-31
Ставрополь (8652)20-65-13
Сургут (3462)77-98-35
Сыктывкар (8212)25-95-17
Тамбов (4752)50-40-97
Тверь (4822)63-31-35

Тольятти (8482)63-91-07
Томск (3822)98-41-53
Тула (4872)33-79-87
Тюмень (3452)66-21-18
Ульяновск (8422)24-23-59
Улан-Удэ (3012)59-97-51
Уфа (347)229-48-12
Хабаровск (4212)92-98-04
Чебоксары (8352)28-53-07
Челябинск (351)202-03-61
Череповец (8202)49-02-64
Чита (3022)38-34-83
Якутск (4112)23-90-97
Ярославль (4852)69-52-93

Россия +7(495)268-04-70

Казахстан +7(727)345-47-04

Беларусь +(375)257-127-884

Узбекистан +998(71)205-18-59

Киргизия +996(312)96-26-47

эл.почта: cce@nt-rt.ru || сайт: <https://crc.nt-rt.ru/>

FAST STICK

Adhesives

Fast tacking, non-chlorinated spray adhesive.

This specialist formulation will provide instant 'grab', allowing stress to be exerted on the bond before full cure strength is achieved. Especially useful for vertical surfaces where instant grab avoids slippage. Tack time approximately 30 seconds.



	Ref.	Description	TDS
	30383-AA 1030591	Fast Stick 12x500 ML en,de,nl,fr,es,pt,it,el	MSDS
	30383-AD 1030592	Fast Stick 12x500 ML en,de,fr,nl,sv,fi,hr,bs,sr,be,ru,ro,sl,sk,et,lv,lt,tr,da,no,es,pt,it,el,pl,cs,hu	MSDS


POWER STICK

Adhesives

Adhesives

High strength adhesive.

Does not contain Methylene Chloride or other chlorinated solvents. CRC Power Stick has a long open bond time, allowing large areas to be covered before the film dries. Use where a high strength adhesive is required e.g. upholstery, warning and information signs. Tack time approximately 1-5 minutes.

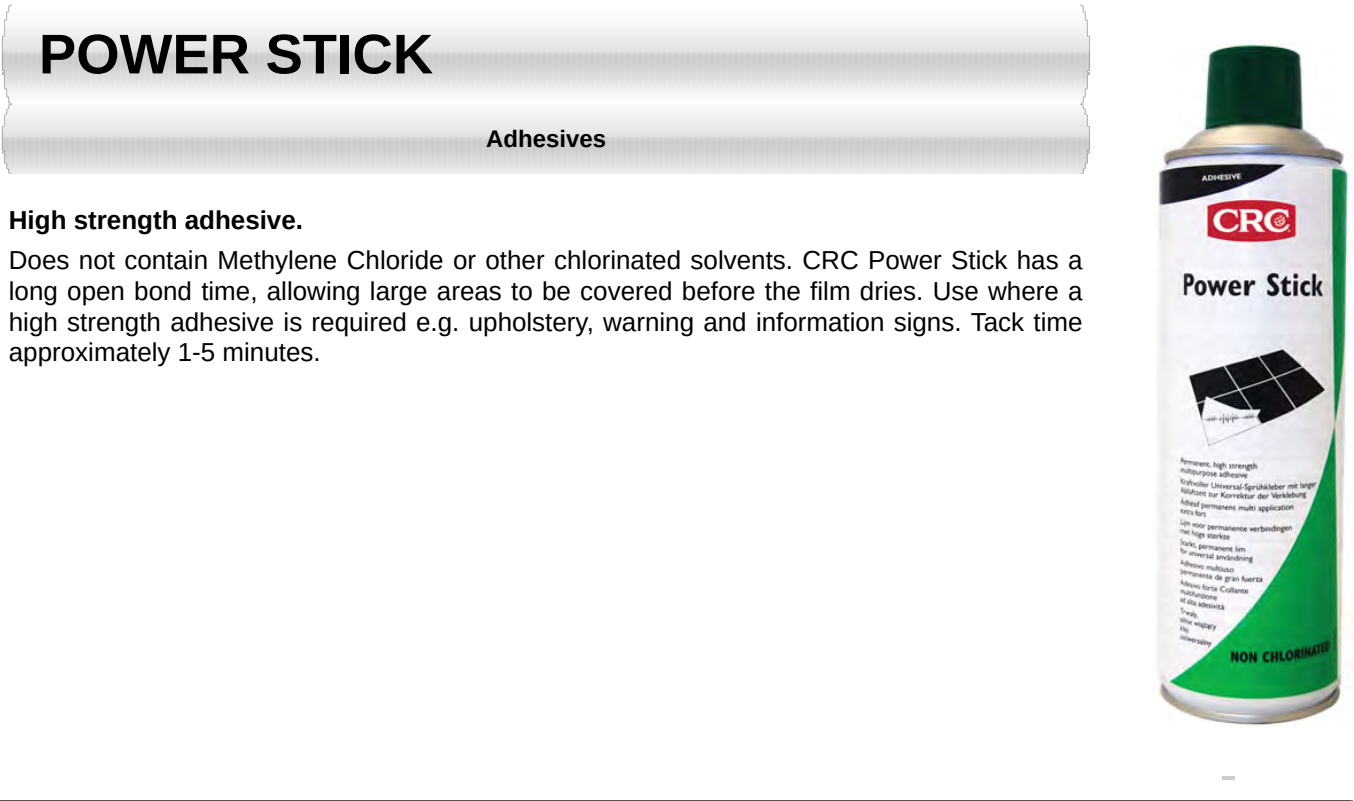

Ref.	Description	TDS
 30454-AD 1030629	Power Stick 12x500 ML en,de,fr,nl,sv,fi,hr,bs,sr,be,ru,ro,sl,sk,et,lv,lt,tr,da,no,es,pt,it,el,pl,cs,hu	MSDS

Public Data - A

30454-AD | Power Stick 12x500 ML

en,de,fr,nl,sv,fi,hr,bs,sr,be,ru,ro,sl,sk,et,lv,lt,tr,da,no,es,pt,it,el,pl,cs,hu

Product Name	Power Stick
Packaging Description	Aerosol
Net Volume (Liter)	.5
Quantity per Carton (if>1)	12
Part Gross Weight (Kilogram)	0.462
Weight Per Carton (Kilogram)	5.544
Parts Per Pallet	720
EAN Code Single Part	5412386059490
EAN Code Carton	5412386846960
Part Dimension - Width (mm)	273
Part Dimension - Depth (mm)	246
Part Dimension - Height (mm)	208
Carton Dimension - Width (mm)	273
Carton Dimension - Depth (mm)	208
Carton Dimension - Height (mm)	246
GHS - Signal Word	Danger
GHS - Hazard & Precautionary Statements	Extremely flammable aerosol. Pressurised container: May burst if heated. May cause drowsiness or dizziness. Toxic to aquatic life with long lasting effects.
GHS - Hazard Pictograms	GHS02 GHS07 GHS09
Intrastat / Tariff Code	35069190
UN Hazard Code	AEROSOLS
Road Tunnel Code	(D)
Hazard Class	2.1

QUICK FIX

Adhesives

A cyanoacrylate adhesive.

Characteristics:

- Multifunctional cyanoacrylate adhesive
- Ideal for bonding mirrors, glass, rubbers, metals and plastics
- Instant adhesive
- Fast bonding and high strength

Benefits:

- Colour: transparent
- Allows adjustments and repositionings
- Applicable on multiple materials.



	Ref.	Description	TDS
	<u>30709-AA</u> 1030747	Quick Fix 12x20 G en,nl,fr	MSDS
	<u>30709-AB</u> 1030748	Quick Fix 12x20 G es,pt	MSDS
	<u>30709-AC</u> 1030749	Quick Fix 12x20 G sv,fi,no	MSDS
	<u>30710-AA</u> 1030750	QUICK FIX 24x3 G en,de,nl,fr,es,pt,sv,fi,no	MSDS

Public Data - B

30709-AA | Quick Fix 12x20 G en,nl,fr

Product Name	Quick Fix
Packaging Description	Bottle
Net Volume (Liter)	.018181818181818182
Part Gross Weight (Kilogram)	.02
Parts Per Pallet	6144
EAN Code Single Part	5412386812828
Part Dimension - Width (mm)	200
Part Dimension - Depth (mm)	185
Part Dimension - Height (mm)	115
GHS - Signal Word	Warning
GHS - Hazard & Precautionary Statements	Causes skin irritation. Causes serious eye irritation. May cause respiratory irritation.
GHS - Hazard Pictograms	GHS07
Intrastat / Tariff Code	35061000
UN Hazard Code	Not classified as hazardous for transport
Road Tunnel Code	
Hazard Class	

Public Data - B

30709-AB | Quick Fix 12x20 Ges,pt

Product Name	Quick Fix
Packaging Description	Bottle
Net Volume (Liter)	.018181818181818182
Part Gross Weight (Kilogram)	.02
Parts Per Pallet	6144
EAN Code Single Part	5412386056055
Part Dimension - Width (mm)	200
Part Dimension - Depth (mm)	185
Part Dimension - Height (mm)	115
GHS - Signal Word	Warning
GHS - Hazard & Precautionary Statements	Causes skin irritation. Causes serious eye irritation. May cause respiratory irritation.
GHS - Hazard Pictograms	GHS07
Intrastat / Tariff Code	35061000
UN Hazard Code	Not classified as hazardous for transport
Road Tunnel Code	
Hazard Class	

Public Data - B

30709-AC | Quick Fix 12x20 G sv,fi,no

Product Name	Quick Fix
Packaging Description	Tube
Net Volume (Liter)	.018181818181818182
Part Gross Weight (Kilogram)	.02
Parts Per Pallet	6144
EAN Code Single Part	5412386056062
Part Dimension - Width (mm)	200
Part Dimension - Depth (mm)	185
Part Dimension - Height (mm)	115
GHS - Signal Word	Warning
GHS - Hazard & Precautionary Statements	Causes skin irritation. Causes serious eye irritation. May cause respiratory irritation.
GHS - Hazard Pictograms	GHS07
Intrastat / Tariff Code	35061000
UN Hazard Code	Not classified as hazardous for transport
Road Tunnel Code	
Hazard Class	

Public Data - B

30710-AA | QUICK FIX 24x3 G en,de,nl,fr,es,pt,sv,fi,no

Product Name	QUICK FIX
Packaging Description	Tube
Net Volume (Liter)	.0027272727272727273
Part Gross Weight (Kilogram)	0.0164
Parts Per Pallet	3072
EAN Code Single Part	5412386812859
Part Dimension - Width (mm)	200
Part Dimension - Depth (mm)	185
Part Dimension - Height (mm)	115
GHS - Signal Word	Warning
GHS - Hazard & Precautionary Statements	Causes skin irritation. Causes serious eye irritation. May cause respiratory irritation.
GHS - Hazard Pictograms	GHS07
Intrastat / Tariff Code	35061000
UN Hazard Code	Not classified as hazardous for transport
Road Tunnel Code	
Hazard Class	

RIGID SEAL

Adhesives

Liquid seal for machined metal flanges.

Characteristics:

- Seals gearbox covers, engine covers, machined metal flanges
- Permanent sealing
- High strength anaerobic adhesive

Benefits:

- Colour: orange
- Excellent filling capacity
- Oil, gas, water, vibrations, shock, temperature and corrosion resistant
- One-component product



	Ref.	Description	TDS
	<u>30699-AA</u> 1030742	RIGID SEAL 12x50 ML en,de,nl,fr,es,pt	MSDS
	<u>30699-AC</u> 1030743	RIGID SEAL 12x50 ML sv,fi,no,pl,cs,ru	MSDS

Public Data - B

30699-AA | RIGID SEAL 12x50 ML en,de,nl,fr,es,pt

Product Name	RIGID SEAL
Packaging Description	Bottle
Net Volume (Liter)	.05
Part Gross Weight (Kilogram)	.045
Parts Per Pallet	864
EAN Code Single Part	5412386769016
Part Dimension - Width (mm)	
Part Dimension - Depth (mm)	
Part Dimension - Height (mm)	
GHS - Signal Word	
GHS - Hazard & Precautionary Statements	
GHS - Hazard Pictograms	
Intrastat / Tariff Code	35061000
UN Hazard Code	Not classified as hazardous for transport
Road Tunnel Code	
Hazard Class	

Public Data - B

30699-AC | RIGID SEAL 12x50 ML sv,fi,no,pl,cs,ru

Product Name	RIGID SEAL
Packaging Description	Bottle
Net Volume (Liter)	.05
Part Gross Weight (Kilogram)	.045
Parts Per Pallet	864
EAN Code Single Part	5412386056178
Part Dimension - Width (mm)	
Part Dimension - Depth (mm)	
Part Dimension - Height (mm)	
GHS - Signal Word	
GHS - Hazard & Precautionary Statements	
GHS - Hazard Pictograms	
Intrastat / Tariff Code	35061000
UN Hazard Code	Not classified as hazardous for transport
Road Tunnel Code	
Hazard Class	

SOFT LOCK

Adhesives

Dismountable locker for threaded metal connections.

Characteristics:

- Locks and seals bolts: M5-M16
- Dismountable locker
- Medium strength anaerobic adhesive
- Good thixotropy and viscosity for good filling capacity
- Broad temp reach : -55°C to +150°C

Benefits:

- Colour: blue
- Connections can be dismantled in the future
- Vibration- and shock resistant
- One-component product



	Ref.	Description	TDS
	<u>30111-AB</u> 1030448	Soft Lock 20x10 ML sv,fi,no	MSDS
	<u>30696-AA</u> 1030736	SOFT LOCK 12x50 ML en,de,nl,fr,es,pt	MSDS
	<u>30696-AC</u> 1030737	SOFT LOCK 12x50 ML sv,fi,no,pl,cs,ru	MSDS

Public Data - B

30111-AB | Soft Lock 20x10 ML sv,fi,no

Product Name	Soft Lock
Packaging Description	Bottle
Net Volume (Liter)	.01
Part Gross Weight (Kilogram)	0.02
Parts Per Pallet	720
EAN Code Single Part	5412386766848
Part Dimension - Width (mm)	
Part Dimension - Depth (mm)	
Part Dimension - Height (mm)	
GHS - Signal Word	
GHS - Hazard & Precautionary Statements	
GHS - Hazard Pictograms	
Intrastat / Tariff Code	35061000
UN Hazard Code	Not classified as hazardous for transport
Road Tunnel Code	
Hazard Class	

Public Data - B

30696-AA | SOFT LOCK 12x50 ML en,de,nl,fr,es,pt

Product Name	SOFT LOCK
Packaging Description	Bottle
Net Volume (Liter)	.05
Part Gross Weight (Kilogram)	.045
Parts Per Pallet	864
EAN Code Single Part	5412386056079
Part Dimension - Width (mm)	
Part Dimension - Depth (mm)	
Part Dimension - Height (mm)	
GHS - Signal Word	
GHS - Hazard & Precautionary Statements	
GHS - Hazard Pictograms	
Intrastat / Tariff Code	35061000
UN Hazard Code	Not classified as hazardous for transport
Road Tunnel Code	
Hazard Class	

Public Data - B

30696-AC | SOFT LOCK 12x50 ML sv,fi,no,pl,cs,ru

Product Name	SOFT LOCK
Packaging Description	Bottle
Net Volume (Liter)	.05
Part Gross Weight (Kilogram)	.045
Parts Per Pallet	864
EAN Code Single Part	5412386766015
Part Dimension - Width (mm)	
Part Dimension - Depth (mm)	
Part Dimension - Height (mm)	
GHS - Signal Word	
GHS - Hazard & Precautionary Statements	
GHS - Hazard Pictograms	
Intrastat / Tariff Code	35061000
UN Hazard Code	Not classified as hazardous for transport
Road Tunnel Code	
Hazard Class	

EASY SEAL

Adhesives

Liquid seal for threaded metal couplings.

Characteristics:

- Locks and seals connections in hydraulic and pneumatic installations: till 3"
- Slow curing time
- Low strength anaerobic adhesive
- Direct sealing

Benefits:

- Colour: white
- Allows adjustments and repositionings during 30 minutes
- Oil, gas, water, vibrations, shock, temperature and corrosion resistant
- One-component product



	Ref.	Description	TDS
	<u>30698-AA</u> 1030740	EASY SEAL 12x50 ML en,de,nl,fr,es,pt	MSDS
	<u>30698-AC</u> 1030741	Easy Seal 12x50 ML sv,fi,no,pl,cs,ru	MSDS

Public Data - B

30698-AA | EASY SEAL 12x50 ML en,de,nl,fr,es,pt

Product Name	EASY SEAL
Packaging Description	Bottle
Net Volume (Liter)	.05
Part Gross Weight (Kilogram)	.045
Parts Per Pallet	864
EAN Code Single Part	5412386768019
Part Dimension - Width (mm)	
Part Dimension - Depth (mm)	
Part Dimension - Height (mm)	
GHS - Signal Word	
GHS - Hazard & Precautionary Statements	
GHS - Hazard Pictograms	
Intrastat / Tariff Code	35061000
UN Hazard Code	Not classified as hazardous for transport
Road Tunnel Code	
Hazard Class	

Public Data - B

30698-AC | Easy Seal 12x50 ML sv,fi,no,pl,cs,ru

Product Name	Easy Seal
Packaging Description	Bottle
Net Volume (Liter)	.05
Part Gross Weight (Kilogram)	.045
Parts Per Pallet	864
EAN Code Single Part	5412386056154
Part Dimension - Width (mm)	
Part Dimension - Depth (mm)	
Part Dimension - Height (mm)	
GHS - Signal Word	
GHS - Hazard & Precautionary Statements	
GHS - Hazard Pictograms	
Intrastat / Tariff Code	35061000
UN Hazard Code	Not classified as hazardous for transport
Road Tunnel Code	
Hazard Class	

EXTRA LOCK

Adhesives

Permanent locker for threaded metal connections and fixation of bearings.

Characteristics:

- Locks and seals bolts: M5-M16
- Permanent locker
- High strength anaerobic adhesive
- Ideal for bearings and bushings
- Broad temp reach : -55°C to +150°C

Benefits:

- Colour: green
- Excellent filling capacity
- Vibrations, shock, temperature and corrosion resistant
- One-component product
- Does not run off



	Ref.	Description	TDS
	<u>30697-AA</u> 1030738	EXTRA LOCK 12x50 ML en,de,nl,fr,es,pt	MSDS
	<u>30697-AC</u> 1030739	EXTRA LOCK 12x50 ML sv,fi,no,pl,cs,ru	MSDS

Public Data - B

30697-AA | EXTRA LOCK 12x50 ML en,de,nl,fr,es,pt

Product Name	EXTRA LOCK
Packaging Description	Bottle
Net Volume (Liter)	.05
Part Gross Weight (Kilogram)	.045
Parts Per Pallet	864
EAN Code Single Part	5412386056109
Part Dimension - Width (mm)	
Part Dimension - Depth (mm)	
Part Dimension - Height (mm)	
GHS - Signal Word	
GHS - Hazard & Precautionary Statements	
GHS - Hazard Pictograms	
Intrastat / Tariff Code	35061000
UN Hazard Code	Not classified as hazardous for transport
Road Tunnel Code	
Hazard Class	

Public Data - B

30697-AC | EXTRA LOCK 12x50 ML sv,fi,no,pl,cs,ru

Product Name	EXTRA LOCK
Packaging Description	Bottle
Net Volume (Liter)	.05
Part Gross Weight (Kilogram)	.045
Parts Per Pallet	864
EAN Code Single Part	5412386767012
Part Dimension - Width (mm)	
Part Dimension - Depth (mm)	
Part Dimension - Height (mm)	
GHS - Signal Word	
GHS - Hazard & Precautionary Statements	
GHS - Hazard Pictograms	
Intrastat / Tariff Code	35061000
UN Hazard Code	Not classified as hazardous for transport
Road Tunnel Code	
Hazard Class	



Part No. 03018

Item# 1003268

CRC® Spray Adhesive, 16.25 Wt Oz

Description

A general purpose quick tack adhesive especially formulated to bond to many foils, plastics, papers, foams, metals, cardboards and cloths. Utilizes a unique web spray applicator.

Applications

- Labeling Boxes & Machinery
- Hanging Insulation
- General Interior Maintenance
- Sealing & Re-Sealing Boxes and Packages For Shipment
- Repair of Furniture & Display Materials

Appearance _____ White, Lacy Band

Brand _____ CRC

Case# _____ 1003267

Color _____ None

Curing Time _____ 24 Hours

DOT Proper Shipping Name _____ Aerosols, Flammable, Limited Quantity

Dry Time Fully Dry _____ 1 Hour

Dry Time Tack Free _____ 10 to 30 Seconds

Evaporation Rate _____ N/A

Flammability Class - CPSC _____ Extremely Flammable

Flash point (C) _____ -20°C

Flash point (F) _____ -4°F

Generic Description _____ Spray Adhesive

I 2 of 5 Code _____ 30078254030181

Item Number _____ 03018

Net Fill _____ 16.25 Wt Oz

Plastic Safe _____ Yes (*Test in a small, inconspicuous area first)

Propellant _____ Hydrocarbon

Removal (How To) _____ Remove with adhesive remover, degreaser, acetone or paint thinner

Specific Gravity _____ 0.68

UPC Code _____ 078254030180

Unit Dimensions _____ 9.19H x 3W x 3D in

Unit Package Description _____ 24 Ounce Aerosol

Units per Case _____ 12

VOC % (Consumer Product def) _____ 35.8

VOC % (Federal) _____ 25.8

VOC Category _____ Not Regulated

VOC Lbs./Gal. (Federal) _____ 2.26

VOC g/L (Consumer Product def) _____ 271.3

VOC g/L (Federal) _____ 271.3

VOC lbs/gal (Consumer Prod def) _____ 2.26

Working Temp (C) _____ -29 to 51°C

Working Temp (F) _____ -20 to 123°F



Part No. 14089

Item# 1004826

CRC® Perma-Mend™ UV Curable Repair Patch

Discontinued

Discontinued product number may still be available for a limited time through your local supplier or retailer.

Description

Light activated fiberglass reinforced self adhesive repair patch.

Applications

- Repair of Tanks
- Roofs
- Switch Boxes
- Mufflers
- Boat Bodies Can Be Used on Any Wood
- Glass
- Concrete and Plastic Surface
- Pipes
- Steps
- Radiators
- Bumpers
- Metal
- Ceramic

Appearance _____ Grey Sheet Lamination

Brand _____ CRC

Case Weight _____ 0.0 lbs

Case# _____ 1004825

Color _____ None

Curing Time _____ 5 Minutes (Sunny), 50 Minutes (Cloudy)

DOT Proper Shipping Name _____ Not Regulated

Dielectric Strength _____ 9 kV/mm

Dry Time Fully Dry _____ 50 Minutes

Dry Time Tack Free _____ 5 Minutes (Sunny) | 50 Minutes (Cloudy)

Evaporation Rate _____ None

Film Thickness _____ 0.6 to 0.7 inches

Film Type _____ Laminate

Flammability Class - CPSC _____ None

Flash point (C) _____ 449°C

Flash point (F) _____ 840°F

Generic Description _____ Repair Patch

I 2 of 5 Code _____ 30078254140897

Item Number _____ 14089

Net Fill _____ 3" x 6"

Plastic Safe _____ Yes

Product Lifecycle Status _____ DISC

UPC Code _____ 078254140896

Unit Dimensions _____ 3H x 6W

Unit Package Description _____ 3" x 6" Patch

Units per Case _____ 12

VOC % (Consumer Product def) _____ 0.6

VOC % (Federal) _____ 0.6

VOC Category _____ Not Regulated

VOC Lbs./Gal. (Federal) _____ 0.08

VOC g/L (Federal) _____ 9.3

Working Temp (C) _____ -40 to 200°C

Working Temp (F) _____ -40 to 392°F



Part No. 14096

Item# 1004832

CRC® Perma-Mend™ UV Curable Repair Patch

Discontinued

Discontinued product number may still be available for a limited time through your local supplier or retailer.

Description

Light activated fiberglass reinforced self adhesive repair patch.

Applications

- Repair of Tanks
- Roofs
- Switch Boxes
- Mufflers
- Boat Bodies Can Be Used on Any Wood
- Glass
- Concrete
- Pipes
- Steps
- Radiators
- Bumpers
- Metal
- Ceramic
- Plastic Surface

Appearance _____ Grey Sheet Lamination

Brand _____ CRC

Case# _____ 1004831

Color _____ None

Curing Time _____ 5 Minutes (Sunny),50 Minutes
(Cloudy)

DOT Proper Shipping Name _____ Not Regulated

Dielectric Strength _____ 9 kV/mm

Dry Time Fully Dry _____ 50 Minutes

Dry Time Tack Free _____ 5 Minutes (Sunny)]50 Minutes
(Cloudy)

Evaporation Rate _____ None

Film Thickness _____ 0.6 to 0.7 inches

Film Type _____ Laminate

Flammability Class - CPSC _____ None

Flash point (C) _____ 449°C

Flash point (F) _____ 840°F

Generic Description _____ Repair Patch

I 2 of 5 Code _____ 30078254140965

Item Number _____ 14096

Net Fill _____ 9" x 12"

Plastic Safe _____ Yes

Product Lifecycle Status _____ DISC

UPC Code _____ 078254140964

Unit Dimensions _____ 9H x 12W

Unit Package Description _____ 9" x 12" Patch

Units per Case _____ 12

VOC % (Consumer Product def) _____ 0.6

VOC % (Federal) _____ 0.6

VOC Category _____ Not Regulated

VOC Lbs./Gal. (Federal) _____ 0.08

VOC g/L (Federal) _____ 9.3

Working Temp (C) _____ -40 to 200°C

Working Temp (F) _____ -40 to 392°F



Part No. 14094

Item# 1004828

CRC® Perma-Mend™ UV Curable Repair Patch

Discontinued

Discontinued product number may still be available for a limited time through your local supplier or retailer.

Description

Light activated fiberglass reinforced self adhesive repair patch.

Applications

- Repair of Tanks
- Roofs
- Switch Boxes
- Mufflers
- Boat Bodies Can Be Used on Any Wood
- Glass
- Concrete and Plastic Surface
- Pipes
- Steps
- Radiators
- Bumpers
- Metal
- Ceramic

Appearance _____ Grey Sheet Lamination

Brand _____ CRC

Case# _____ 1004827

Color _____ None

Curing Time _____ 5 Minutes (Sunny),50 Minutes
(Cloudy)

DOT Proper Shipping Name _____ Not Regulated

Dielectric Strength _____ 9 kV/mm

Dry Time Fully Dry _____ 50 Minutes

Dry Time Tack Free _____ 5 Minutes (Sunny)|50 Minutes
(Cloudy)

Evaporation Rate _____ None

Film Thickness _____ 0.6 to 0.7 inches

Film Type _____ Laminate

Flammability Class - CPSC _____ None

Flash point (C) _____ 449°C

Flash point (F) _____ 840°F

Generic Description _____ Repair Patch

I 2 of 5 Code _____ 30078254140941

Item Number _____ 14094

Net Fill _____ 6" x 9"

Plastic Safe _____ Yes

Product Lifecycle Status _____ DISC

UPC Code _____ 078254140940

Unit Dimensions _____ 6H x 9W

Unit Package Description _____ 6" x 9" Patch

Units per Case _____ 12

VOC % (Consumer Product def) _____ 0.6

VOC % (Federal) _____ 0.6

VOC Category _____ Not Regulated

VOC Lbs./Gal. (Federal) _____ 0.08

VOC g/L (Federal) _____ 9.3

Working Temp (C) _____ -40 to 200°C

Working Temp (F) _____ -40 to 392°F

Алматы (727)345-47-04
Ангарск (3955)60-70-56
Архангельск (8182)63-90-72
Астрахань (8512)99-46-04
Барнаул (3852)73-04-60
Белгород (4722)40-23-64
Благовещенск (4162)22-76-07
Брянск (4832)59-03-52
Владивосток (423)249-28-31
Владикавказ (8672)28-90-48
Владимир (4922)49-43-18
Волгоград (844)278-03-48
Вологда (8172)26-41-59
Воронеж (473)204-51-73
Екатеринбург (343)384-55-89

Иваново (4932)77-34-06
Ижевск (3412)26-03-58
Иркутск (395)279-98-46
Казань (843)206-01-48
Калининград (4012)72-03-81
Калуга (4842)92-23-67
Кемерово (3842)65-04-62
Киров (8332)68-02-04
Коломна (4966)23-41-49
Кострома (4942)77-07-48
Краснодар (861)203-40-90
Красноярск (391)204-63-61
Курск (4712)77-13-04
Курган (3522)50-90-47
Липецк (4742)52-20-81

Магнитогорск (3519)55-03-13
Москва (495)268-04-70
Мурманск (8152)59-64-93
Набережные Челны (8552)20-53-41
Нижний Новгород (831)429-08-12
Новокузнецк (3843)20-46-81
Ноябрьск (3496)41-32-12
Новосибирск (383)227-86-73
Омск (3812)21-46-40
Орел (4862)44-53-42
Оренбург (3532)37-68-04
Пенза (8412)22-31-16
Петрозаводск (8142)55-98-37
Псков (8112)59-10-37
Пермь (342)205-81-47

Ростов-на-Дону (863)308-18-15
Рязань (4912)46-61-64
Самара (846)206-03-16
Санкт-Петербург (812)309-46-40
Саратов (845)249-38-78
Севастополь (8692)22-31-93
Саранск (8342)22-96-24
Симферополь (3652)67-13-56
Смоленск (4812)29-41-54
Сочи (862)225-72-31
Ставрополь (8652)20-65-13
Сургут (3462)77-98-35
Сыктывкар (8212)25-95-17
Тамбов (4752)50-40-97
Тверь (4822)63-31-35

Тольятти (8482)63-91-07
Томск (3822)98-41-53
Тула (4872)33-79-87
Тюмень (3452)66-21-18
Ульяновск (8422)24-23-59
Улан-Удэ (3012)59-97-51
Уфа (347)229-48-12
Хабаровск (4212)92-98-04
Чебоксары (8352)28-53-07
Челябинск (351)202-03-61
Череповец (8202)49-02-64
Чита (3022)38-34-83
Якутск (4112)23-90-97
Ярославль (4852)69-52-93

Россия +7(495)268-04-70

Казахстан +7(727)345-47-04

Беларусь +(375)257-127-884

Узбекистан +998(71)205-18-59

Киргизия +996(312)96-26-47

По вопросам продаж и поддержки обращайтесь:

эл.почта: cce@nt-rt.ru || сайт: <https://crc.nt-rt.ru/>