

# Металлообработка

## Технические характеристики

По вопросам продаж и поддержки обращайтесь:

Алматы (727)345-47-04  
Ангарск (3955)60-70-56  
Архангельск (8182)63-90-72  
Астрахань (8512)99-46-04  
Барнаул (3852)73-04-60  
Белгород (4722)40-23-64  
Благовещенск (4162)22-76-07  
Брянск (4832)59-03-52  
Владивосток (423)249-28-31  
Владикавказ (8672)28-90-48  
Владимир (4922)49-43-18  
Волгоград (844)278-03-48  
Вологда (8172)26-41-59  
Воронеж (473)204-51-73  
Екатеринбург (343)384-55-89

Иваново (4932)77-34-06  
Ижевск (3412)26-03-58  
Иркутск (395)279-98-46  
Казань (843)206-01-48  
Калининград (4012)72-03-81  
Калуга (4842)92-23-67  
Кемерово (3842)65-04-62  
Киров (8332)68-02-04  
Коломна (4966)23-41-49  
Кострома (4942)77-07-48  
Краснодар (861)203-40-90  
Красноярск (391)204-63-61  
Курск (4712)77-13-04  
Курган (3522)50-90-47  
Липецк (4742)52-20-81

Магнитогорск (3519)55-03-13  
Москва (495)268-04-70  
Мурманск (8152)59-64-93  
Набережные Челны (8552)20-53-41  
Нижний Новгород (831)429-08-12  
Новокузнецк (3843)20-46-81  
Ноябрьск (3496)41-32-12  
Новосибирск (383)227-86-73  
Омск (3812)21-46-40  
Орел (4862)44-53-42  
Оренбург (3532)37-68-04  
Пенза (8412)22-31-16  
Петрозаводск (8142)55-98-37  
Псков (8112)59-10-37  
Пермь (342)205-81-47

Ростов-на-Дону (863)308-18-15  
Рязань (4912)46-61-64  
Самара (846)206-03-16  
Санкт-Петербург (812)309-46-40  
Саратов (845)249-38-78  
Севастополь (8692)22-31-93  
Саранск (8342)22-96-24  
Симферополь (3652)67-13-56  
Смоленск (4812)29-41-54  
Сочи (862)225-72-31  
Ставрополь (8652)20-65-13  
Сургут (3462)77-98-35  
Сыктывкар (8212)25-95-17  
Тамбов (4752)50-40-97  
Тверь (4822)63-31-35

Тольятти (8482)63-91-07  
Томск (3822)98-41-53  
Тула (4872)33-79-87  
Тюмень (3452)66-21-18  
Ульяновск (8422)24-23-59  
Улан-Удэ (3012)59-97-51  
Уфа (347)229-48-12  
Хабаровск (4212)92-98-04  
Чебоксары (8352)28-53-07  
Челябинск (351)202-03-61  
Череповец (8202)49-02-64  
Чита (3022)38-34-83  
Якутск (4112)23-90-97  
Ярославль (4852)69-52-93

Россия +7(495)268-04-70

Казахстан +7(727)345-47-04

Беларусь +(375)257-127-884

Узбекистан +998(71)205-18-59

Киргизия +996(312)96-26-47

эл.почта: [cse@nt-rt.ru](mailto:cse@nt-rt.ru) || сайт: <https://crc.nt-rt.ru/>



Part No. 03066

Item# 1003329

## CRC® Blue Layout Fluid, 12 Wt Oz

### Discontinued

Discontinued product number may still be available for a limited time through your local supplier or retailer.

### Description

A dark blue fluid leaves a smooth even coat for all layout work. The non-flaking, non-peeling fluid dries very quickly, sticks to both metal and glass and allows you to scribe sharp precise lines.

### Applications

- For Use By Tool and Die Makers
- Pattern Makers
- Machinists
- Maintenance Mechanics

Appearance	Blue Liquid	Brand	CRC
Case#	1003328	Color	None
DOT Proper Shipping Name	Aerosols, Flammable, Limited Quantity	Dry Time Fully Dry	Fast
Evaporation Rate	Fast	Flammability Class - CPSC	Extremely Flammable
Flash point (C)	-29°C	Flash point (F)	-20.2°F
Generic Description	Blue Layout Fluid	I 2 of 5 Code	30078254030662
Item Number	03066	Net Fill	12 Wt Oz
Plastic Safe	No	Product Lifecycle Status	DISC
Propellant	Hydrocarbon	Specific Gravity	0.75
UPC Code	078254030661	Unit Dimensions	7.75H x 2.63W x 2.63D in
Unit Package Description	16 Ounce Aerosol	Units per Case	12
VOC % (Consumer Product def)	43.73	VOC % (Federal)	40.3
VOC Category	Not Regulated	VOC Lbs./Gal. (Federal)	5.2
VOC g/L (Consumer Product def)	332	VOC g/L (Federal)	624.9
VOC lbs/gal (Consumer Prod def)	2.75		

---



Part No. 14051

Item# 1004786

# CRC® Cutting Oil Thread Cutting Lubricant, 1 Gal

## Description

Cutting Oil is a superior thread cutting lubricant for use on all types of metals, including brass, copper and aluminum.

## Applications

- Tapping
- Drilling
- Shearing
- Reaming Metal Parts
- Conduit
- Bolt Holes
- Aluminum Sheets
- Gears and Chains
- Threading
- Sawing
- Turning
- Pipes
- Screws
- Housings
- Strapping

Appearance	Clear Dark Amber Liquid	Brand	CRC
Case#	1004785	Color	None
DOT Proper Shipping Name	Not Regulated	Evaporation Rate	Slow
Film Type	Non-Drying	Flammability Class - CPSC	Not a Consumer Product
Flash point (C)	181°C	Flash point (F)	357°F
Ford Tox No.	196034	Generic Description	Thread Cutting Lubricant
I 2 of 5 Code	30078254140514	Item Number	14051
NSF Category Code	P1	NSF Number	017207
Net Fill	1 Gal	Plastic Safe	Safe on Most
Propellant	None	Removal (How To)	Remove with general purpose degreaser.
Restricted From Sale In	SCAQMD	Specific Gravity	0.919
UPC Code	078254140513	Unit Dimensions	10.25H x 5W x 6.13D in
Unit Package Description	1 Gallon Bottle	Units per Case	4
VOC % (Consumer Product def)	0	VOC % (Federal)	100
VOC Category	Cutting or Tapping Oil - Non-Aerosol	VOC Lbs./Gal. (Federal)	12.9
VOC g/L (Consumer Product def)	0	VOC g/L (Federal)	1550.6
VOC lbs/gal (Consumer Prod def)	0	Working Temp (C)	Max 148.9°C
Working Temp (F)	Max 300°F		

---



Part No. 14050

Item# 1004784

# CRC® Cutting Oil Thread Cutting Lubricant, 12 Wt Oz

## Description

Cutting Oil is a superior thread cutting lubricant for use on all types of metals, including brass, copper and aluminum.

## Applications

- Tapping
- Drilling
- Shearing
- Reaming Metal Parts
- Conduit
- Bolt Holes
- Aluminum Sheets
- Gears and Chains
- Threading
- Sawing
- Turning
- Pipes
- Screws
- Housings
- Strapping

Appearance	Clear Dark Amber Liquid	Brand	CRC
Case#	1004783	Color	None
DOT Proper Shipping Name	Aerosols, Flammable, Limited Quantity	Evaporation Rate	Slow
Film Type	Non-Drying	Flammability Class - CPSC	Flammable
Flash point (C)	158°C	Flash point (F)	316°F
Generic Description	Thread Cutting Lubricant	I 2 of 5 Code	30078254140507
Item Number	14050	NSF Category Code	P1
NSF Number	017206	Net Fill	12 Wt Oz
Plastic Safe	Safe on Most	Propellant	Hydrocarbon
Removal (How To)	Remove with general purpose degreaser.	Restricted From Sale In	SCAQMD
Specific Gravity	0.924	UPC Code	078254140506
Unit Dimensions	7.75H x 2.63W x 2.63D in	Unit Package Description	16 Ounce Aerosol
Units per Case	12	VOC % (Consumer Product def)	20
VOC % (Federal)	100	VOC Category	Cutting or Tapping Oil - Aerosol
VOC Lbs./Gal. (Federal)	12.9	VOC g/L (Consumer Product def)	184.8
VOC g/L (Federal)	1550.6	VOC lbs/gal (Consumer Prod def)	1.54
Working Temp (C)	Max 148.9°C	Working Temp (F)	Max 300°F

---



Part No. 03069

Item# 1003331

# CRC® Layout Fluid Remover, 12 Wt Oz

## Discontinued

Discontinued product number may still be available for a limited time through your local supplier or retailer.

### Description

Non-chlorinated, super-strength formula removes layout fluids quickly, effectively and leaves no residue.

### Applications

- For Use By Tool and Die Makers
- Pattern Makers
- Machinists
- Maintenance Mechanics



Appearance \_\_\_\_\_ Clear Liquid

Brand \_\_\_\_\_ CRC

Case# \_\_\_\_\_ 1003330

Color \_\_\_\_\_ None

DOT Proper Shipping Name \_\_\_\_\_ Aerosols, Flammable, Limited  
Quantity

Evaporation Rate \_\_\_\_\_ Fast

Flammability Class - CPSC \_\_\_\_\_ Extremely Flammable

Flash point (C) \_\_\_\_\_ <-18°C

Flash point (F) \_\_\_\_\_ <0°F

Generic Description \_\_\_\_\_ Layout Fluid Remover

I 2 of 5 Code \_\_\_\_\_ 30078254030693

Item Number \_\_\_\_\_ 03069

Net Fill \_\_\_\_\_ 12 Wt Oz

Plastic Safe \_\_\_\_\_ No

Product Lifecycle Status \_\_\_\_\_ DISC

Propellant \_\_\_\_\_ Carbon Dioxide

Specific Gravity \_\_\_\_\_ 0.814

UPC Code \_\_\_\_\_ 078254030692

Unit Dimensions \_\_\_\_\_ 7.75H x 2.63W x 2.63D in

Unit Package Description \_\_\_\_\_ 16 Ounce Aerosol

Units per Case \_\_\_\_\_ 12

VOC % (Consumer Product def) \_\_\_\_\_ 43.2

VOC % (Federal) \_\_\_\_\_ 43.15

VOC Category \_\_\_\_\_ Single Purpose Cleaner/Degreaser

VOC Lbs./Gal. (Federal) \_\_\_\_\_ 5.6

VOC g/L (Consumer Product  
def) \_\_\_\_\_ 356.5

VOC g/L (Federal) \_\_\_\_\_ 669.1

VOC lbs/gal (Consumer Prod  
def) \_\_\_\_\_ 2.97

Part No. B-001

Item# 1008314

# Brite Zinc Pen 1x.3 oz

## Discontinued

Discontinued product number may still be available for a limited time through your local supplier or retailer.

### Description

3 fl oz pen. 69% zinc metal. One step color matches the shiny look of hot dip galvanizing.



Part No. 03442

Item# 1003510

# CRC® TrueTap® Aqua Water Soluble Cutting Fluid, 5 Gal

## Discontinued

alternate available Product No. 03440 [ITEM# 1003509](#)

Discontinued product number may still be available for a limited time through your local supplier or retailer.

## Description

Water-soluble cutting fluid with excellent cooling and lubrication properties. Suitable replacement for solvent or oil-based cutting fluids. Works well in machine tools containing water-soluble coolants.

## Applications

- Tapping
- Drilling
- Shearing
- Reaming Metal Parts
- Conduit
- Bolt Holes
- Aluminum Sheets
- Gears and Chains
- Threading
- Sawing
- Turning
- Pipes
- Screws
- Housings
- Strapping

Appearance	Clear to Translucent Blue Liquid	Brand	CRC
Color	None	DOT Proper Shipping Name	Not Regulated
Evaporation Rate	Slow	Film Type	Non-Oily
Flammability Class - CPSC	None	Flash point (C)	None
Flash point (F)	None	Generic Description	Water Soluble Cutting Fluid
Item Number	03442	Net Fill	5 Gal
PH	7.1	Plastic Safe	Yes
Product Lifecycle Status	DISC	Propellant	None
Removal (How To)	Remove with water.	Replacement Legacy Num	03440
Replacement Product SKU	1003509	Restricted From Sale In	SCAQMD
Specific Gravity	1	UPC Code	078254034423
Unit Dimensions	13.80H x 11.30W x 11.30D in	Unit Package Description	5 Gallon Pail
Units per Case	1	VOC % (Consumer Product def)	0
VOC Category	Cutting or Tapping Oil (Non-Aerosol)	VOC g/L (Consumer Product def)	0
VOC lbs/gal (Consumer Prod def)	0		

---



Part No. 03440

Item# 1003509

# CRC® TrueTap® Aqua Water Soluble Cutting Fluid, 16 Fl Oz

## Discontinued

Discontinued product number may still be available for a limited time through your local supplier or retailer.

### Description

Water-soluble cutting fluid with excellent cooling and lubrication properties. Suitable replacement for solvent or oil-based cutting fluids. Works well in machine tools containing water-soluble coolants.

### Applications

- Tapping
- Drilling
- Shearing
- Reaming Metal Parts
- Conduit
- Bolt Holes
- Aluminum Sheets
- Gears and Chains
- Threading
- Sawing
- Turning
- Pipes
- Screws
- Housings
- Strapping

Appearance	Clear to Translucent Blue Liquid	Brand	CRC
Case#	1003508	Color	None
DOT Proper Shipping Name	Not Regulated	Evaporation Rate	Slow
Film Type	Non-Oily	Flammability Class - CPSC	None
Flash point (C)	None	Flash point (F)	None
Generic Description	Water Soluble Cutting Fluid	I 2 of 5 Code	30078254034400
Item Number	03440	Net Fill	16 Fl Oz
PH	7.1	Plastic Safe	Yes
Product Lifecycle Status	DISC	Propellant	None
Removal (How To)	Remove with water.	Restricted From Sale In	SCAQMD
Specific Gravity	1	UPC Code	078254034409
Unit Dimensions	9.38H x 2.75W x 3.75D in	Unit Package Description	16 Ounce Bottle
Units per Case	12	VOC % (Consumer Product def)	0
VOC Category	Cutting or Tapping Oil (Non-Aerosol)	VOC g/L (Consumer Product def)	0
VOC lbs/gal (Consumer Prod def)	0		

---



Part No. 03410

Item# 1003507

# CRC® TrueTap® Foamy Cutting Fluid, 13 Wt Oz

## Discontinued

Discontinued product number may still be available for a limited time through your local supplier or retailer.

### Description

Easy application foaming action penetrates deep into the cut to extend cutting tool life and promote a superior finish. Foam thoroughly coats cutting tool.

### Applications

- Tapping
- Drilling
- Shearing
- Reaming Metal Parts
- Conduit
- Bolt Holes
- Aluminum Sheets
- Gears and Chains
- Threading
- Sawing
- Turning
- Pipes
- Screws
- Housings
- Strapping

Appearance \_\_\_\_\_ Viscous Amber Liquid

Brand \_\_\_\_\_ CRC

Case# \_\_\_\_\_ 1003506

Color \_\_\_\_\_ None

DOT Proper Shipping Name \_\_\_\_\_ Aerosols, Flammable, Limited  
Quantity

Evaporation Rate \_\_\_\_\_ Slow

Film Type \_\_\_\_\_ Lubricating Oil

Flammability Class - CPSC \_\_\_\_\_ Flammable

Flash point (C) \_\_\_\_\_ >235°C

Flash point (F) \_\_\_\_\_ >455°F

Generic Description \_\_\_\_\_ Foaming Cutting Fluid

I 2 of 5 Code \_\_\_\_\_ 30078254034103

Item Number \_\_\_\_\_ 03410

Net Fill \_\_\_\_\_ 13 Wt Oz

Plastic Safe \_\_\_\_\_ Yes

Product Lifecycle Status \_\_\_\_\_ DISC

Propellant \_\_\_\_\_ Hydrocarbon

Restricted From Sale In \_\_\_\_\_ SCAQMD

Specific Gravity \_\_\_\_\_ 1.03

UPC Code \_\_\_\_\_ 078254034102

Unit Dimensions \_\_\_\_\_ 7.75H x 2.63W x 2.63D in

Unit Package Description \_\_\_\_\_ 16 Ounce Aerosol

Units per Case \_\_\_\_\_ 12

VOC % (Consumer Product def) \_\_\_\_\_ 25

VOC % (Federal) \_\_\_\_\_ 100

VOC Category \_\_\_\_\_ Cutting or Tapping Oil (Aerosol)


VOC Lbs./Gal. (Federal) \_\_\_\_\_ 12.9

VOC g/L (Consumer Product  
def) \_\_\_\_\_ 257.5

VOC g/L (Federal) \_\_\_\_\_ 1550.6

VOC lbs/gal (Consumer Prod  
def) \_\_\_\_\_ 2.14



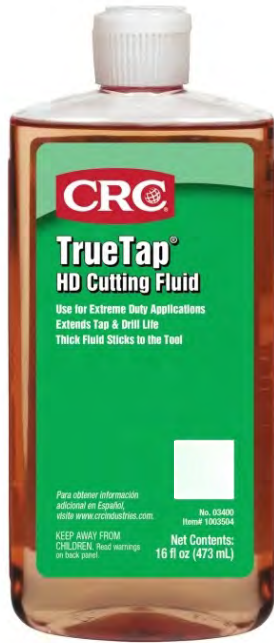

Part No. 03400

Item# 1003504

## CRC® TrueTap® HD Heavy Duty Cutting Fluid, 16 Fl Oz

### Description

A heavy-duty cutting fluid designed for use in severe applications. Thick, honey-like fluid clings to cutting tool throughout the operation. Excellent for use on tough stainless steel and exotic metals.

### Applications

- Tapping
- Drilling
- Shearing
- Reaming Metal Parts
- Conduit
- Bolt Holes
- Aluminum Sheets
- Gears and Chains
- Threading
- Sawing
- Turning
- Pipes
- Screws
- Housings
- Strapping

Appearance \_\_\_\_\_ Amber Liquid

Brand \_\_\_\_\_ CRC

Case# \_\_\_\_\_ 1003503

Color \_\_\_\_\_ None

DOT Proper Shipping Name \_\_\_\_\_ Not Regulated

Evaporation Rate \_\_\_\_\_ Slow

Film Type \_\_\_\_\_ Lubricating Oil

Flammability Class - CPSC \_\_\_\_\_ None

Flash point (C) \_\_\_\_\_ 213°C

Flash point (F) \_\_\_\_\_ 415°F

Generic Description \_\_\_\_\_ Heavy Duty Cutting Fluid

I 2 of 5 Code \_\_\_\_\_ 30078254034004

Item Number \_\_\_\_\_ 03400

Net Fill \_\_\_\_\_ 16 Fl Oz

Plastic Safe \_\_\_\_\_ Yes

Propellant \_\_\_\_\_ None

Restricted From Sale In \_\_\_\_\_ SCAQMD

Specific Gravity \_\_\_\_\_ 1.108

UPC Code \_\_\_\_\_ 078254034003

Unit Dimensions \_\_\_\_\_ 9.38H x 2.75W x 3.75D in

Unit Package Description \_\_\_\_\_ 16 Ounce Bottle

Units per Case \_\_\_\_\_ 12

VOC % (Consumer Product def) \_\_\_\_\_ <1

VOC Category \_\_\_\_\_ Cutting or Tapping Oil - Non-Aerosol

VOC g/L (Consumer Product def) \_\_\_\_\_ <60

VOC lbs/gal (Consumer Prod def) \_\_\_\_\_ <0.5



Part No. 03403

Item# 1003505

# CRC® TrueTap® HD Heavy Duty Cutting Fluid, 55 Gal

## Description

A heavy-duty cutting fluid designed for use in severe applications. Thick, honey-like fluid clings to the cutting tool throughout the operation. Excellent for use on tough stainless steel and exotic metals.

## Applications

- Tapping
- Drilling
- Shearing
- Reaming Metal Parts
- Conduit
- Bolt Holes
- Aluminum Sheets
- Gears and Chains
- Threading
- Sawing
- Turning
- Pipes
- Screws
- Housings
- Strapping

Appearance \_\_\_\_\_ Amber Liquid

Brand \_\_\_\_\_ CRC

Color \_\_\_\_\_ None

DOT Proper Shipping Name \_\_\_\_\_ Not Regulated

Evaporation Rate \_\_\_\_\_ Slow

Film Type \_\_\_\_\_ Lubricating Oil

Flammability Class - CPSC \_\_\_\_\_ None

Flash point (C) \_\_\_\_\_ 213°C

Flash point (F) \_\_\_\_\_ 415°F

Generic Description \_\_\_\_\_ Heavy Duty Cutting Fluid

Item Number \_\_\_\_\_ 03403

Net Fill \_\_\_\_\_ 55 Gal

Plastic Safe \_\_\_\_\_ Yes

Product Lifecycle Status \_\_\_\_\_ DISC

Propellant \_\_\_\_\_ None

Replacement Legacy Num \_\_\_\_\_ 03400

Replacement Product SKU \_\_\_\_\_ 1003503

Restricted From Sale In \_\_\_\_\_ SCAQMD

Specific Gravity \_\_\_\_\_ 1.108

UPC Code \_\_\_\_\_ 078254034034

Unit Dimensions \_\_\_\_\_ 35H x 24.5W x 24.5D in

Unit Package Description \_\_\_\_\_ 55 Gallon Drum

Units per Case \_\_\_\_\_ 1

VOC % (Consumer Product def) \_\_\_\_\_ <1

VOC Category \_\_\_\_\_ Cutting or Tapping Oil (Non-Aerosol)

VOC g/L (Consumer Product def) \_\_\_\_\_ <60

VOC lbs/gal (Consumer Prod def) \_\_\_\_\_ <0.5

---



Part No. 03480

Item# 1003512

# CRC® TrueTap® Wax Stick, 14.5 Wt Oz

## Discontinued

Discontinued product number may still be available for a limited time through your local supplier or retailer.

### Description

Multi-purpose lubricant works on all metals. Convenient stick is easy to use and mess-free. Environmentally safe.

### Applications

- Tapping
- Drilling
- Shearing
- Reaming Metal Parts
- Conduit
- Bolt Holes
- Aluminum Sheets
- Gears and Chains
- Threading
- Sawing
- Turning
- Pipes
- Screws
- Housings
- Strapping

Appearance \_\_\_\_\_ Solid Amber Wax

Brand \_\_\_\_\_ CRC

Case# \_\_\_\_\_ 1003511

Color \_\_\_\_\_ None

DOT Proper Shipping Name \_\_\_\_\_ Not Regulated

Evaporation Rate \_\_\_\_\_ Slow

Film Type \_\_\_\_\_ Wax

Flammability Class - CPSC \_\_\_\_\_ None

Flash point (C) \_\_\_\_\_ >213°C

Flash point (F) \_\_\_\_\_ >415°F

Generic Description \_\_\_\_\_ Wax Stick

I 2 of 5 Code \_\_\_\_\_ 30078254034806

Item Number \_\_\_\_\_ 03480

Net Fill \_\_\_\_\_ 14.5 Wt Oz

Plastic Safe \_\_\_\_\_ Yes

Product Lifecycle Status \_\_\_\_\_ DISC

Propellant \_\_\_\_\_ None

Specific Gravity \_\_\_\_\_ 0.85

UPC Code \_\_\_\_\_ 078254034805

Unit Dimensions \_\_\_\_\_ 2.13H x 11.13W x 2.13D in

Unit Package Description \_\_\_\_\_ 16 Ounce Stick

Units per Case \_\_\_\_\_ 10

VOC % (Consumer Product def) \_\_\_\_\_ 0

VOC % (Federal) \_\_\_\_\_ 0

VOC Category \_\_\_\_\_ Not Regulated

VOC Lbs./Gal. (Federal) \_\_\_\_\_ 0

VOC g/L (Consumer Product def) \_\_\_\_\_ 0

VOC g/L (Federal) \_\_\_\_\_ 0

VOC lbs/gal (Consumer Prod def) \_\_\_\_\_ 0

Working Temp (C) \_\_\_\_\_ -17.8 to 204.4°C

Working Temp (F) \_\_\_\_\_ 0 to 400°F

---



Part No. SL2523

Item# 1007833

## Sta-Lube® Honing & Cutting Oil, 1 Gal

### Discontinued

Discontinued product number may still be available for a limited time through your local supplier or retailer.

### Description

An all-purpose metal working/ cutting lubricant that extends tool life and improves machined surface finish.

### Applications

- Valve Refacing
- Honing
- Reaming
- Threading
- Broaching
- Piston Pin Fitting
- Tapping
- Grinding
- Boring
- Drilling and Milling

4 Ball EP 0.674 mm

4 Ball Wear 0.34

Appearance Red Liquid

Brand Sta-Lube

Case# 1007832

DOT Proper Shipping Name Not Regulated

Evaporation Rate Slow

Flammability Class - CPSC None

Flash point (C) 192°C

Flash point (F) 378°F

Generic Description Honing & Cutting Oil

I 2 of 5 Code 30072213252300

ISO Viscosity Grade 32

Item Number SL2523

Net Fill 1 Gal

Pour Point (C) -17.78°C

Pour Point (F) 0°F

Product Lifecycle Status DISC

Propellant None

Removal (How To) Remove with a general purpose degreaser

Restricted From Sale In SCAQMD

Specific Gravity 0.89

UPC Code 072213252309

Unit Dimensions 10.63H x 4.75W x 6D in

Unit Package Description 1 Gallon Bottle

Units per Case 4

VOC % (Consumer Product def) 2.9

VOC Category Cutting or Tapping Oil (Non-Aerosol)

VOC g/L (Consumer Product def) 26

VOC lbs/gal (Consumer Prod def) 0.2

Working Temp (C) 10 to 65.6°C

Working Temp (F) 50 to 150°F





Part No. SL2513

Item# 1007830

## Sta-Lube® Soluble Oil, 1 Gal

### Discontinued

Discontinued product number may still be available for a limited time through your local supplier or retailer.

### Description

For use in most machine shop applications, particularly grinding. Use for improved wetting, cleaning & lubricating during metal cutting and grinding applications.

### Applications

- Cutting
- Grinding of Ferrous Metals
- Machining (10:1 - 30:1 Water to Oil)
- Grinding (30:2 - 50:1 Water to Oil)
- Grinding of Non-Ferrous Metals

Appearance \_\_\_\_\_ Amber Liquid

Brand \_\_\_\_\_ Sta-Lube

Case# \_\_\_\_\_ 1007829

DOT Proper Shipping Name \_\_\_\_\_ Not Regulated

Evaporation Rate \_\_\_\_\_ <1 (Butyl Acetate=1)

Flammability Class - CPSC \_\_\_\_\_ None

Flash point (C) \_\_\_\_\_ 121°C

Flash point (F) \_\_\_\_\_ 250°F

Generic Description \_\_\_\_\_ Soluble Oil

I 2 of 5 Code \_\_\_\_\_ 30072213251303

ISO Viscosity Grade \_\_\_\_\_ 20 to 30

Item Number \_\_\_\_\_ SL2513

Net Fill \_\_\_\_\_ 1 Gal

Plastic Safe \_\_\_\_\_ Yes

Product Lifecycle Status \_\_\_\_\_ DISC

Propellant \_\_\_\_\_ None

Specific Gravity \_\_\_\_\_ 0.92

UPC Code \_\_\_\_\_ 072213251302

Unit Dimensions \_\_\_\_\_ 10.63H x 4.75W x 6D in

Unit Package Description \_\_\_\_\_ 1 Gallon Bottle

Units per Case \_\_\_\_\_ 4

VOC % (Consumer Product def) \_\_\_\_\_ 2.63

VOC % (Federal) \_\_\_\_\_ 8 concentrate; 1.6 min dilution

VOC Category \_\_\_\_\_ Cutting or Tapping Oil - Non-Aerosol

VOC Lbs./Gal. (Federal) \_\_\_\_\_ 0.61 concentrate; 0.12 min dilution

VOC g/L (Consumer Product def) \_\_\_\_\_ 24.2

VOC g/L (Federal) \_\_\_\_\_ 73.6 concentrate; 14.7 min dilution

VOC lbs/gal (Consumer Prod def) \_\_\_\_\_ 7.66



Part No. SL2515

Item# 1007831

# Sta-Lube® Soluble Oil, 5 Gal

## Discontinued

Discontinued product number may still be available for a limited time through your local supplier or retailer.

### Description

For use in most machine shop applications, particularly grinding. Use for improved wetting, cleaning & lubricating during metal cutting and grinding applications.

### Applications

- Cutting
- Grinding of Ferrous Metals
- Machining (10:1 - 30:1 Water to Oil)
- Grinding (30:2 - 50:1 Water to Oil)
- Grinding of Non-Ferrous Metals

Appearance ———— Amber Liquid

Brand ———— Sta-Lube

DOT Proper Shipping Name ———— Not Regulated

Evaporation Rate ———— <1 (Butyl Acetate=1)

Flammability Class - CPSC ———— None

Flash point (C) ———— 121°C

Flash point (F) ———— 250°F

Generic Description ———— Soluble Oil

ISO Viscosity Grade ———— 20 to 30

Item Number ———— SL2515

Net Fill ———— 5 Gal

Plastic Safe ———— Yes

Product Lifecycle Status ———— DISC

Propellant ———— None

Specific Gravity ———— 0.92

UPC Code ———— 072213251500

Unit Dimensions ———— 14.5H x 12W x 12D in

Unit Package Description ———— 5 Gallon Pail

Units per Case ———— 1

VOC % (Consumer Product def) ———— 2.63

VOC % (Federal) ———— 8 concentrate; 1.6 min dilution

VOC Category ———— Cutting or Tapping Oil (Non-Aerosol)

VOC Lbs./Gal. (Federal) ———— 0.61 concentrate; 0.12 min dilution

VOC g/L (Consumer Product def) ———— 24.2

VOC g/L (Federal) ———— 73.6 concentrate; 14.7 min dilution

VOC lbs/gal (Consumer Prod def) ———— 7.66



Part No. SL2512

Item# 1007828

## Sta-Lube® Soluble Oil, 32 Fl Oz

### Discontinued

alternate available Product No. SL2513 [ITEM# 1007830](#)

Discontinued product number may still be available for a limited time through your local supplier or retailer.

### Description

For use in most machine shop applications, particularly grinding. Use for improved wetting, cleaning & lubricating during metal cutting and grinding applications.

### Applications

- Cutting
- Grinding of Ferrous Metals
- Machining (10:1 - 30:1 Water to Oil)
- Grinding (30:2 - 50:1 Water to Oil)
- Grinding of Non-Ferrous Metals

Appearance \_\_\_\_\_ Amber Liquid

Brand \_\_\_\_\_ Sta-Lube

Case# \_\_\_\_\_ 1007827

DOT Proper Shipping Name \_\_\_\_\_ Not Regulated

Evaporation Rate \_\_\_\_\_ <1 (Butyl Acetate=1)

Flammability Class - CPSC \_\_\_\_\_ None

Flash point (C) \_\_\_\_\_ 121°C

Flash point (F) \_\_\_\_\_ 250°F

Generic Description \_\_\_\_\_ Soluble Oil

I 2 of 5 Code \_\_\_\_\_ 30072213251204

ISO Viscosity Grade \_\_\_\_\_ 20 to 30

Item Number \_\_\_\_\_ SL2512

Net Fill \_\_\_\_\_ 32 Fl Oz

Plastic Safe \_\_\_\_\_ Yes

Product Lifecycle Status \_\_\_\_\_ DISC

Propellant \_\_\_\_\_ None

Replacement Legacy Num \_\_\_\_\_ SL2513

Replacement Product SKU \_\_\_\_\_ 1007830

Specific Gravity \_\_\_\_\_ 0.92

UPC Code \_\_\_\_\_ 072213251203

Unit Dimensions \_\_\_\_\_ 7.5H x 2.5W x 4.75D in

Unit Package Description \_\_\_\_\_ 1 Quart Bottle

Units per Case \_\_\_\_\_ 12

VOC % (Consumer Product def) \_\_\_\_\_ 2.63

VOC % (Federal) \_\_\_\_\_ 8 concentrate; 1.6 min dilution

VOC Category \_\_\_\_\_ Cutting or Tapping Oil (Non-Aerosol)

VOC Lbs./Gal. (Federal) \_\_\_\_\_ 0.61 concentrate; 0.12 min dilution

VOC g/L (Consumer Product def) \_\_\_\_\_ 24.2

VOC g/L (Federal) \_\_\_\_\_ 73.6 concentrate; 14.7 min dilution

VOC lbs/gal (Consumer Prod def) \_\_\_\_\_ 7.66



Part No. 007060

Item# 1008258

## Weld-Aid® Lube-Matic® Lube Pads

### Description

For all types of steel wire including solid and fabricated. Each black pad is pre-treated with Lube-Matic® liquid allowing for smooth feeding of wire with poor cast, poor helix, rust or long feed liners. 6 pads per pack. Not recommended for aluminum.

### Applications

Appearance \_\_\_\_\_ Solid Wire Pad

Brand \_\_\_\_\_ Weld-Aid

Case# \_\_\_\_\_ 1008160

DOT Proper Shipping Name \_\_\_\_\_ NOT REGULATED

Evaporation Rate \_\_\_\_\_ Not Determined

Flammability Class - CPSC \_\_\_\_\_ Not a Consumer Product

Generic Description \_\_\_\_\_ Pads

I 2 of 5 Code \_\_\_\_\_ 30731592706018

Item Number \_\_\_\_\_ 007060

Net Fill \_\_\_\_\_ 1 pad

Propellant \_\_\_\_\_ None

Removal (How To) \_\_\_\_\_ N/A

UPC Code \_\_\_\_\_ 731592706017

Unit Dimensions \_\_\_\_\_ 7.00H x 0.75W x 5.00D in

Unit Package Description \_\_\_\_\_ Plastic Bag

Units per Case \_\_\_\_\_ 6

VOC % (Consumer Product def) \_\_\_\_\_ 0

VOC % (Federal) \_\_\_\_\_ 0

VOC Category \_\_\_\_\_ Not regulated

VOC Lbs./Gal. (Federal) \_\_\_\_\_ 0

VOC g/L (Consumer Product def) \_\_\_\_\_ 0

VOC g/L (Federal) \_\_\_\_\_ 0

VOC lbs/gal (Consumer Prod def) \_\_\_\_\_ 0

---





Part No. 007061

Item# 1008260

## Weld-Aid® Lube-Matic® Kleener Pads

### Description

Red pads clean rust and dirt off wire surface reducing burnbacks by up to 50%. Excellent for all types of welding wire including aluminum. 6 pads per pack.

### Applications

- For Maximum Torch Life and Best Possible Cleaning and Lubrication of Wires Use Both Pads Together (Black and Red) For Each Welding Station/Every Wire Change

Appearance \_\_\_\_\_ Solid Wire Pad

Brand \_\_\_\_\_ Weld-Aid

Case# \_\_\_\_\_ 1008162

DOT Proper Shipping Name \_\_\_\_\_ NOT REGULATED

Evaporation Rate \_\_\_\_\_ Not Determined

Flammability Class - CPSC \_\_\_\_\_ Not a Consumer Product

Generic Description \_\_\_\_\_ Pads

I 2 of 5 Code \_\_\_\_\_ 30731592706117

Item Number \_\_\_\_\_ 007061

Net Fill \_\_\_\_\_ 1 pad

Propellant \_\_\_\_\_ None

Removal (How To) \_\_\_\_\_ N/A

UPC Code \_\_\_\_\_ 731592706116

Unit Dimensions \_\_\_\_\_ 7.00H x 0.75W x 5.00D in

Unit Package Description \_\_\_\_\_ Plastic Bag

Units per Case \_\_\_\_\_ 6

VOC % (Consumer Product def) \_\_\_\_\_ 0

VOC % (Federal) \_\_\_\_\_ 0

VOC Category \_\_\_\_\_ Not regulated

VOC Lbs./Gal. (Federal) \_\_\_\_\_ 0

VOC g/L (Consumer Product def) \_\_\_\_\_ 0

VOC g/L (Federal) \_\_\_\_\_ 0

VOC lbs/gal (Consumer Prod def) \_\_\_\_\_ 0



Part No. 007062

Item# 1008262

## Weld-Aid® Lube-Matic®, 2 pads

### Discontinued

Discontinued product number may still be available for a limited time through your local supplier or retailer.

### Description

For maximum torch life and best possible cleaning and lubrication of wires, use both pads together (black and red) for each welding station and every wire change. Pack includes one black and one red pad.

### Applications

- For Maximum Torch Life and Best Possible Cleaning and Lubrication of Wires Use Both Pads Together (Black and Red) For Each Welding Station/Every Wire Change

Appearance \_\_\_\_\_ Solid Wire Pad

Brand \_\_\_\_\_ Weld-Aid

Case# \_\_\_\_\_ 1008164

DOT Proper Shipping Name \_\_\_\_\_ NOT REGULATED

Evaporation Rate \_\_\_\_\_ Not Determined

Flash point (C) \_\_\_\_\_ 149

Flash point (F) \_\_\_\_\_ 300.2

Generic Description \_\_\_\_\_ Pads

I 2 of 5 Code \_\_\_\_\_ 30731592706216

Item Number \_\_\_\_\_ 007062

Net Fill \_\_\_\_\_ 2 Pad

Product Lifecycle Status \_\_\_\_\_ DISC

Propellant \_\_\_\_\_ None

Removal (How To) \_\_\_\_\_ N/A

UPC Code \_\_\_\_\_ 731592706215

Unit Dimensions \_\_\_\_\_ 7.00H x 5.00W x 0.75D in

Unit Package Description \_\_\_\_\_ Plastic Bag

Units per Case \_\_\_\_\_ 24

VOC % (Federal) \_\_\_\_\_ 0

VOC Category \_\_\_\_\_ Not Regulated

VOC Lbs./Gal. (Federal) \_\_\_\_\_ 0

VOC g/L (Consumer Product def) \_\_\_\_\_ 0

VOC g/L (Federal) \_\_\_\_\_ 0

VOC lbs/gal (Consumer Prod def) \_\_\_\_\_ 0



Part No. 007040

Item# 1008301

## Weld-Aid® Lube-Matic® Wire Kleener and Lubricant

### Discontinued

Discontinued product number may still be available for a limited time through your local supplier or retailer.

### Description

For all types of steel wire including solid and fabricated. Each black pad is pre-treated with Lube-Matic® liquid allowing for smooth feeding of wire with poor cast, poor helix, rust or long feed liners. 6 pads per pack. Not recommended for aluminum.

### Applications

- Apply as Needed to Lube-Matic® Kleener Pads

Appearance \_\_\_\_\_ Clear Light Yellow Liquid

Brand \_\_\_\_\_ Weld-Aid

Case# \_\_\_\_\_ 1008222

DOT Proper Shipping Name \_\_\_\_\_ Dichloromethane Solution, Limited  
Quantity

Evaporation Rate \_\_\_\_\_ Not Determined

Flammability Class - CPSC \_\_\_\_\_ Not a Consumer Product

Flash point (C) \_\_\_\_\_ >149°C

Flash point (F) \_\_\_\_\_ >300.2°F

Generic Description \_\_\_\_\_ Lube-Matic® Liquid

I 2 of 5 Code \_\_\_\_\_ 30731592704014

Item Number \_\_\_\_\_ 007040

Net Fill \_\_\_\_\_ 5 Oz

Product Lifecycle Status \_\_\_\_\_ DSEL

Propellant \_\_\_\_\_ None

Restricted From Sale In \_\_\_\_\_ CA

UPC Code \_\_\_\_\_ 731592704013

Unit Dimensions \_\_\_\_\_ 4.5H x 0.75W x 2.0D in

Unit Package Description \_\_\_\_\_ 5 Ounce Metal Can

Units per Case \_\_\_\_\_ 6

VOC % (Consumer Product def) \_\_\_\_\_ 0.5

VOC % (Federal) \_\_\_\_\_ 0.5

VOC Category \_\_\_\_\_ Single Purpose Cleaner/Degreaser

VOC Lbs./Gal. (Federal) \_\_\_\_\_ 0.053

VOC g/L (Consumer Product  
def) \_\_\_\_\_ 6.35

VOC g/L (Federal) \_\_\_\_\_ 6.35

VOC lbs/gal (Consumer Prod  
def) \_\_\_\_\_ 0.053



Part No. YOR-101-1PT

Item# 1008238

## Weld-Aid® Nozzle-Dip HD®, 16 Oz

### Discontinued

alternate available Product No. 007094 **ITEM# 1008236**

Discontinued product number may still be available for a limited time through your local supplier or retailer.

### Description

The leading water-based gel. Reduces spatter buildup on nozzles and tips. Excellent cooling properties for longer tip and nozzle life. Can dip hot or cold, gel will not migrate into liner. Non-flashing and paintable.

### Applications

- For Spatter Build Up on Nozzles and Tips

Appearance \_\_\_\_\_ Gel

Brand \_\_\_\_\_ Weld-Aid

Case Weight \_\_\_\_\_ 1.25 lbs

Case# \_\_\_\_\_ 1008139

DOT Proper Shipping Name \_\_\_\_\_ Not Regulated

Evaporation Rate \_\_\_\_\_ Not Determined

Film Thickness \_\_\_\_\_ NA

Generic Description \_\_\_\_\_ YORK NOZZLE GEL 1 PINT

I 2 of 5 Code \_\_\_\_\_ 30746450000108

Item Number \_\_\_\_\_ YOR-101-1PT

Net Fill \_\_\_\_\_ 16 Oz

Product Lifecycle Status \_\_\_\_\_ DISC

Propellant \_\_\_\_\_ N/A

Replacement Legacy Num \_\_\_\_\_ 007094

Replacement Product SKU \_\_\_\_\_ 1008236

UPC Code \_\_\_\_\_ 746450000107

Unit Dimensions \_\_\_\_\_ 3.75H x 3.50W x 3.50D in

Unit Package Description \_\_\_\_\_ 16 Ounce Jar

Units per Case \_\_\_\_\_ 12

VOC % (Consumer Product def) \_\_\_\_\_ 1.4

VOC % (Federal) \_\_\_\_\_ 1.4

VOC Category \_\_\_\_\_ Not Regulated

VOC Lbs./Gal. (Federal) \_\_\_\_\_ 0.114

VOC g/L (Consumer Product def) \_\_\_\_\_ 13.7

VOC g/L (Federal) \_\_\_\_\_ 13.7

VOC lbs/gal (Consumer Prod def) \_\_\_\_\_ 0.114





Part No. 007094

Item# 1008236

## Weld-Aid® Nozzle-Dip HD® 32 Ounce

### Description

The leading water-based gel. Reduces spatter buildup on nozzles and tips. Excellent cooling properties for longer tip and nozzle life. Can dip hot or cold, gel will not migrate into liner. Non-flashing and paintable.

### Applications

- For Spatter Build Up on Nozzles and Tips

Appearance \_\_\_\_\_ Gel

Brand \_\_\_\_\_ Weld-Aid

Case Weight \_\_\_\_\_ 2.39 lbs

Case# \_\_\_\_\_ 1008137

DOT Proper Shipping Name \_\_\_\_\_ Not Regulated

Evaporation Rate \_\_\_\_\_ Not Determined

Film Thickness \_\_\_\_\_ NA

Flammability Class - CPSC \_\_\_\_\_ Not a Consumer Product

Flash point (C) \_\_\_\_\_ 93.9 °C

Flash point (F) \_\_\_\_\_ 201 °F

Generic Description \_\_\_\_\_ HD NOZZLE DIP GEL  
(32OZ/.95L)

I 2 of 5 Code \_\_\_\_\_ 30731592709415

Item Number \_\_\_\_\_ 007094

Net Fill \_\_\_\_\_ 32 oz

Propellant \_\_\_\_\_ N/A

UPC Code \_\_\_\_\_ 731592709414

Unit Dimensions \_\_\_\_\_ 4.25H x 4.75W x 4.75D in

Unit Package Description \_\_\_\_\_ 32 Ounce Jar

Units per Case \_\_\_\_\_ 6

VOC % (Consumer Product def) \_\_\_\_\_ 1.4

VOC % (Federal) \_\_\_\_\_ 1.4

VOC Category \_\_\_\_\_ Not Regulated

VOC Lbs./Gal. (Federal) \_\_\_\_\_ 0.114

VOC g/L (Consumer Product def) \_\_\_\_\_ 13.7

VOC g/L (Federal) \_\_\_\_\_ 13.7

VOC lbs/gal (Consumer Prod def) \_\_\_\_\_ 0.114



Part No. 007001X

Item# 1008390

## Weld-Aid® Nozzle-Kleen® 1/4" Tip 3/8" Nozzle Ground Tool

### Discontinued

Discontinued product number may still be available for a limited time through your local supplier or retailer.

### Description

NK-1X 1/4" TIP, 3/8" Nozzle Ground

### Applications

Appearance \_\_\_\_\_ Solid Object

Brand \_\_\_\_\_ Weld-Aid

Case# \_\_\_\_\_ 1008166

DOT Proper Shipping Name \_\_\_\_\_ Not Regulated

Evaporation Rate \_\_\_\_\_ N/A

Generic Description \_\_\_\_\_ Tool

I 2 of 5 Code \_\_\_\_\_ 30731592700115

Item Number \_\_\_\_\_ 007001X

Net Fill \_\_\_\_\_ N/A

Product Lifecycle Status \_\_\_\_\_ DISC

Propellant \_\_\_\_\_ N/A

Restricted From Sale In \_\_\_\_\_ N/A

UPC Code \_\_\_\_\_ 731592700114

Unit Dimensions \_\_\_\_\_ 7.25H x 4.0W x 0.38D in

Unit Package Description \_\_\_\_\_ Plastic Bag

Units per Case \_\_\_\_\_ 5

---



Part No. 007004X

Item# 1008393

## Weld-Aid® Nozzle-Kleen® 3/8" Tip 5/8" Nozzle Ground Tool

### Discontinued

Discontinued product number may still be available for a limited time through your local supplier or retailer.

### Description

NK-4X 3/8" TIP, 5/8" Nozzle Ground

### Applications

Appearance \_\_\_\_\_ Solid Object

Brand \_\_\_\_\_ Weld-Aid

Case# \_\_\_\_\_ 1008169

DOT Proper Shipping Name \_\_\_\_\_ Not Regulated

Evaporation Rate \_\_\_\_\_ N/A

Generic Description \_\_\_\_\_ Tool

I 2 of 5 Code \_\_\_\_\_ 30731592700412

Item Number \_\_\_\_\_ 007004X

Net Fill \_\_\_\_\_ N/A

Product Lifecycle Status \_\_\_\_\_ DISC

Propellant \_\_\_\_\_ N/A

Restricted From Sale In \_\_\_\_\_ N/A

UPC Code \_\_\_\_\_ 731592700411

Unit Dimensions \_\_\_\_\_ 7.25H x 4.0W x 0.38D in

Unit Package Description \_\_\_\_\_ Plastic Bag

Units per Case \_\_\_\_\_ 5

---



Part No. 007002X

Item# 1008391

## Weld-Aid® Nozzle-Kleen® 5/16" Tip 1/2" Nozzle Ground Tool

### Discontinued

Discontinued product number may still be available for a limited time through your local supplier or retailer.

### Description

NK-2X 5/16" TIP, 1/2" Nozzle Ground

### Applications

Appearance \_\_\_\_\_ Solid Object

Brand \_\_\_\_\_ Weld-Aid

Case# \_\_\_\_\_ 1008167

DOT Proper Shipping Name \_\_\_\_\_ Not Regulated

Evaporation Rate \_\_\_\_\_ N/A

Generic Description \_\_\_\_\_ Tool

I 2 of 5 Code \_\_\_\_\_ 30731592700214

Item Number \_\_\_\_\_ 007002X

Net Fill \_\_\_\_\_ N/A

Product Lifecycle Status \_\_\_\_\_ DISC

Propellant \_\_\_\_\_ N/A

Restricted From Sale In \_\_\_\_\_ N/A

UPC Code \_\_\_\_\_ 731592700213

Unit Dimensions \_\_\_\_\_ 7.25H x 4.0W x 0.38D in

Unit Package Description \_\_\_\_\_ Plastic Bag

Units per Case \_\_\_\_\_ 5

---





Part No. 007003X

Item# 1008392

## Weld-Aid® Nozzle-Kleen® 5/16" Tip 5/8" Nozzle Ground Tool

### Discontinued

Discontinued product number may still be available for a limited time through your local supplier or retailer.

### Description

NK-3X 5/16" TIP, 5/8" Nozzle Ground

### Applications

Appearance \_\_\_\_\_ Solid Object

Brand \_\_\_\_\_ Weld-Aid

Case# \_\_\_\_\_ 1008168

DOT Proper Shipping Name \_\_\_\_\_ Not Regulated

Evaporation Rate \_\_\_\_\_ N/A

Generic Description \_\_\_\_\_ Tool

I 2 of 5 Code \_\_\_\_\_ 30731592700313

Item Number \_\_\_\_\_ 007003X

Net Fill \_\_\_\_\_ N/A

Product Lifecycle Status \_\_\_\_\_ DISC

Propellant \_\_\_\_\_ N/A

Restricted From Sale In \_\_\_\_\_ N/A

UPC Code \_\_\_\_\_ 731592700312

Unit Dimensions \_\_\_\_\_ 7.25H x 4.0W x 0.38D in

Unit Package Description \_\_\_\_\_ Plastic Bag

Units per Case \_\_\_\_\_ 5

---



Part No. 007005X

Item# 1008394

## Weld-Aid® Nozzle-Kleen® 13/32" Tip 3/4" Nozzle Ground Tool

### Discontinued

Discontinued product number may still be available for a limited time through your local supplier or retailer.

### Description

NK-5X 13/32" TIP, 3/4" Nozzle Ground

### Applications

Appearance \_\_\_\_\_ Solid Object

Brand \_\_\_\_\_ Weld-Aid

Case# \_\_\_\_\_ 1008170

DOT Proper Shipping Name \_\_\_\_\_ Not Regulated

Evaporation Rate \_\_\_\_\_ N/A

Generic Description \_\_\_\_\_ Tool

I 2 of 5 Code \_\_\_\_\_ 30731592700511

Item Number \_\_\_\_\_ 007005X

Net Fill \_\_\_\_\_ N/A

Product Lifecycle Status \_\_\_\_\_ DISC

Propellant \_\_\_\_\_ N/A

Restricted From Sale In \_\_\_\_\_ N/A

UPC Code \_\_\_\_\_ 731592700510

Unit Dimensions \_\_\_\_\_ 7.25H x 4.0W x 0.38D in

Unit Package Description \_\_\_\_\_ Plastic Bag

Units per Case \_\_\_\_\_ 5

---



Part No. 007088

Item# 1008257

## Weld-Aid® Weld-Kleen 350® Anti-Spatter, 13.75 Oz

### Description

All Position (AP) is the same environmentally friendly, water-based anti-spatter as found in Weld-Kleen 350®, but in a unique, pressurized bag-on-valve aerosol can. Each press of the nozzle releases the same Weld Kleen 350® as our pump quart. Contains no harmful solvents or CO2.

### Applications

- For Use on Most Base Metal Applications Used By Leading Manufacturers
- Effective For Use in Robot Torch Blow Down Systems

Appearance \_\_\_\_\_ Red

Brand \_\_\_\_\_ Weld-Aid

Case# \_\_\_\_\_ 1008159

DOT Proper Shipping Name \_\_\_\_\_ Aerosols, Non-Flammable, Limited  
Quantity

Evaporation Rate \_\_\_\_\_ Slow

Flammability Class - CPSC \_\_\_\_\_ Not a Consumer Product

Flash point (C) \_\_\_\_\_ >300°C

Flash point (F) \_\_\_\_\_ >572°F

Generic Description \_\_\_\_\_ Anti-Spatter

I 2 of 5 Code \_\_\_\_\_ 30731592708814

Item Number \_\_\_\_\_ 007088

Net Fill \_\_\_\_\_ 389 g

Propellant \_\_\_\_\_ Nitrogen

UPC Code \_\_\_\_\_ 731592708813

Unit Dimensions \_\_\_\_\_ 9.25Hx2.75Wx2.75D in

Unit Package Description \_\_\_\_\_ 16 Ounce Aerosol

Units per Case \_\_\_\_\_ 6

VOC % (Consumer Product def) \_\_\_\_\_ 0.01

VOC Category \_\_\_\_\_ Not regulated

VOC g/L (Consumer Product  
def) \_\_\_\_\_ 0.1

VOC lbs/gal (Consumer Prod def) \_\_\_\_\_ 0.000835

---

## По вопросам продаж и поддержки обращайтесь:

Алматы (727)345-47-04  
Ангарск (3955)60-70-56  
Архангельск (8182)63-90-72  
Астрахань (8512)99-46-04  
Барнаул (3852)73-04-60  
Белгород (4722)40-23-64  
Благовещенск (4162)22-76-07  
Брянск (4832)59-03-52  
Владивосток (423)249-28-31  
Владикавказ (8672)28-90-48  
Владимир (4922)49-43-18  
Волгоград (844)278-03-48  
Вологда (8172)26-41-59  
Воронеж (473)204-51-73  
Екатеринбург (343)384-55-89

Иваново (4932)77-34-06  
Ижевск (3412)26-03-58  
Иркутск (395)279-98-46  
Казань (843)206-01-48  
Калининград (4012)72-03-81  
Калуга (4842)92-23-67  
Кемерово (3842)65-04-62  
Киров (8332)68-02-04  
Коломна (4966)23-41-49  
Кострома (4942)77-07-48  
Краснодар (861)203-40-90  
Красноярск (391)204-63-61  
Курск (4712)77-13-04  
Курган (3522)50-90-47  
Липецк (4742)52-20-81

Магнитогорск (3519)55-03-13  
Москва (495)268-04-70  
Мурманск (8152)59-64-93  
Набережные Челны (8552)20-53-41  
Нижний Новгород (831)429-08-12  
Новокузнецк (3843)20-46-81  
Ноябрьск (3496)41-32-12  
Новосибирск (383)227-86-73  
Омск (3812)21-46-40  
Орел (4862)44-53-42  
Оренбург (3532)37-68-04  
Пенза (8412)22-31-16  
Петрозаводск (8142)55-98-37  
Псков (8112)59-10-37  
Пермь (342)205-81-47

Ростов-на-Дону (863)308-18-15  
Рязань (4912)46-61-64  
Самара (846)206-03-16  
Санкт-Петербург (812)309-46-40  
Саратов (845)249-38-78  
Севастополь (8692)22-31-93  
Саранск (8342)22-96-24  
Симферополь (3652)67-13-56  
Смоленск (4812)29-41-54  
Сочи (862)225-72-31  
Ставрополь (8652)20-65-13  
Сургут (3462)77-98-35  
Сыктывкар (8212)25-95-17  
Тамбов (4752)50-40-97  
Тверь (4822)63-31-35

Тольятти (8482)63-91-07  
Томск (3822)98-41-53  
Тула (4872)33-79-87  
Тюмень (3452)66-21-18  
Ульяновск (8422)24-23-59  
Улан-Удэ (3012)59-97-51  
Уфа (347)229-48-12  
Хабаровск (4212)92-98-04  
Чебоксары (8352)28-53-07  
Челябинск (351)202-03-61  
Череповец (8202)49-02-64  
Чита (3022)38-34-83  
Якутск (4112)23-90-97  
Ярославль (4852)69-52-93

**Россия** +7(495)268-04-70

**Казахстан** +7(727)345-47-04

**Беларусь** +(375)257-127-884

**Узбекистан** +998(71)205-18-59

**Киргизия** +996(312)96-26-47

эл.почта: [cse@nt-rt.ru](mailto:cse@nt-rt.ru) || сайт: <https://crc.nt-rt.ru/>