

# Каталог продукции ТООП CRC Industries Deutschland

По вопросам продаж и поддержки обращайтесь:

Алматы (727)345-47-04  
Ангарск (3955)60-70-56  
Архангельск (8182)63-90-72  
Астрахань (8512)99-46-04  
Барнаул (3852)73-04-60  
Белгород (4722)40-23-64  
Благовещенск (4162)22-76-07  
Брянск (4832)59-03-52  
Владивосток (423)249-28-31  
Владикавказ (8672)28-90-48  
Владимир (4922)49-43-18  
Волгоград (844)278-03-48  
Вологда (8172)26-41-59  
Воронеж (473)204-51-73  
Екатеринбург (343)384-55-89

Иваново (4932)77-34-06  
Ижевск (3412)26-03-58  
Иркутск (395)279-98-46  
Казань (843)206-01-48  
Калининград (4012)72-03-81  
Калуга (4842)92-23-67  
Кемерово (3842)65-04-62  
Киров (8332)68-02-04  
Коломна (4966)23-41-49  
Кострома (4942)77-07-48  
Краснодар (861)203-40-90  
Красноярск (391)204-63-61  
Курск (4712)77-13-04  
Курган (3522)50-90-47  
Липецк (4742)52-20-81

Магнитогорск (3519)55-03-13  
Москва (495)268-04-70  
Мурманск (8152)59-64-93  
Набережные Челны (8552)20-53-41  
Новокузнецк (3843)20-46-81  
Ноябрьск (3496)41-32-12  
Новосибирск (383)227-86-73  
Омск (3812)21-46-40  
Орел (4862)44-53-42  
Оренбург (3532)37-68-04  
Пенза (8412)22-31-16  
Петрозаводск (8142)55-98-37  
Псков (8112)59-10-37  
Пермь (342)205-81-47

Ростов-на-Дону (863)308-18-15  
Рязань (4912)46-61-64  
Самара (846)206-03-16  
Санкт-Петербург (812)309-46-40  
Саратов (845)249-38-78  
Севастополь (8692)22-31-93  
Саранск (8342)22-96-24  
Симферополь (3652)67-13-56  
Смоленск (4812)29-41-54  
Сочи (862)225-72-31  
Ставрополь (8652)20-65-13  
Сургут (3462)77-98-35  
Сыктывкар (8212)25-95-17  
Тамбов (4752)50-40-97  
Тверь (4822)63-31-35

Тольятти (8482)63-91-07  
Томск (3822)98-41-53  
Тула (4872)33-79-87  
Тюмень (3452)66-21-18  
Ульяновск (8422)24-23-59  
Улан-Удэ (3012)59-97-51  
Уфа (347)229-48-12  
Хабаровск (4212)92-98-04  
Чебоксары (8352)28-53-07  
Челябинск (351)202-03-61  
Череповец (8202)49-02-64  
Чита (3022)38-34-83  
Якутск (4112)23-90-97  
Ярославль (4852)69-52-93

**Россия** +7(495)268-04-70

**Казахстан** +7(727)345-47-04

**Беларусь** +(375)257-127-884

**Узбекистан** +998(71)205-18-59

**Киргизия** +996(312)96-26-47

эл.почта: [cce@nt-rt.ru](mailto:cce@nt-rt.ru) || сайт: <https://crc.nt-rt.ru/>



# 1958

Born in a Pennsylvania garage  
with a single product

Now a **GLOBAL LEADER**





















CRC is a leading global manufacturer of specialty products and formulations for maintenance and repair professionals and do-it-yourselfers, serving the industrial, electrical, automotive, marine, heavy truck, hardware and aviation markets.


























CRC has a rich history of innovation, driven by a core focus on identifying unmet needs in the marketplace and providing differentiated solutions for its customers. CRC has been first-to-market with many industry-leading products such as CRC Brakleen®, the #1 selling brake parts cleaner worldwide. That passion for innovation continues today as the company creates high quality formulations that are custom-matched to specific application needs while keeping the health and safety of the user at the forefront in a highly-regulated environment.

CRC is the only company to offer the S.D.[L.]® Safety Data Label – a Safety Data Sheet printed on the reverse side of the product label, keeping critical safety information at the fingertips of the user.

As an ISO (International Organization for Standardization) 9001:2015 certified manufacturer, CRC places strict controls on every step of the product development and manufacturing process; starting with the finest raw materials and continuing with consistent, quality manufacturing techniques. The benefits of achieving and maintaining ISO 9001:2015 certification reach CRC customers through the consistent conformity of its products and services, and the assurance of superior quality, environmental responsibility, safety and reliability.

	Industrial Cleaners ..... 4		Tool & Equipment Oils ..... 35
	Industrial Precision Cleaners ..... 4		Greases ..... 36
	Industrial Heavy Duty Degreasers ..... 7		Mold Releases ..... 40
	Aqueous Cleaners ..... 11		Insecticides ..... 42
	SmartWasher® Parts Cleaning System ..... 13		Equipment ..... 42
	Lubricants ..... 16		Vehicle Maintenance ..... 43
	Corrosion Inhibitors ..... 23		Marine Maintenance ..... 46
	Welding ..... 25		Aviation Maintenance ..... 47
	Metalworking ..... 26		Rust Remover ..... 48
	Electrical Maintenance ..... 27		Glossary of Terms ..... 50
	Electrical Precision Cleaners ..... 27		NSF Category Codes ..... 51
	Electrical Heavy Duty Degreasers ..... 29		Indices ..... 52
	Electrical Cable Cleaners ..... 31		
	Electrical Lubricants ..... 31		
	Specialty Products ..... 32		


## PACKAGE SIZE GUIDE


For the most up-to-date version go to .

CRC®, Brakleen®, Weld-Aid®, Sta-Lube®, K&W®, Marykate®, SmartWasher®, Evapo-Rust®, and all products denoted w/™ and ® are trademarks or registered trademarks of CRC Industries, Inc.

## LOOKING FOR A PRECISION CLEANER?

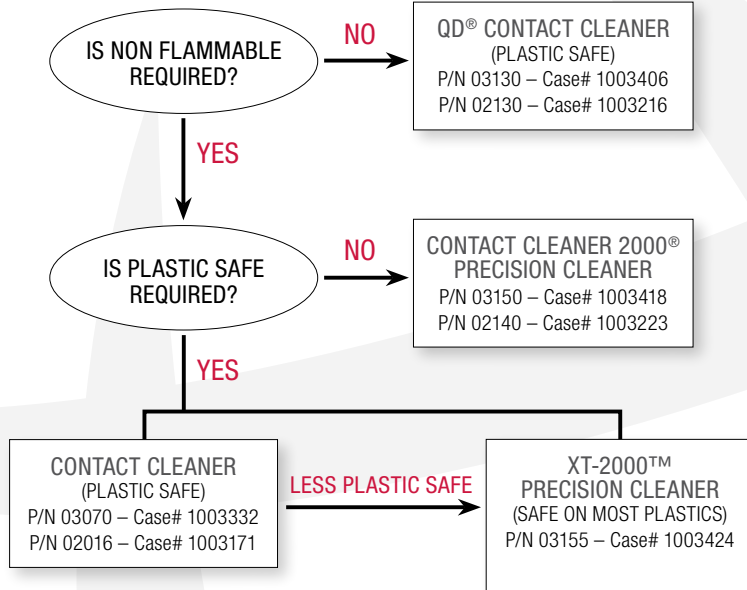

## LOOKING FOR A SOLVENT DEGREASER?

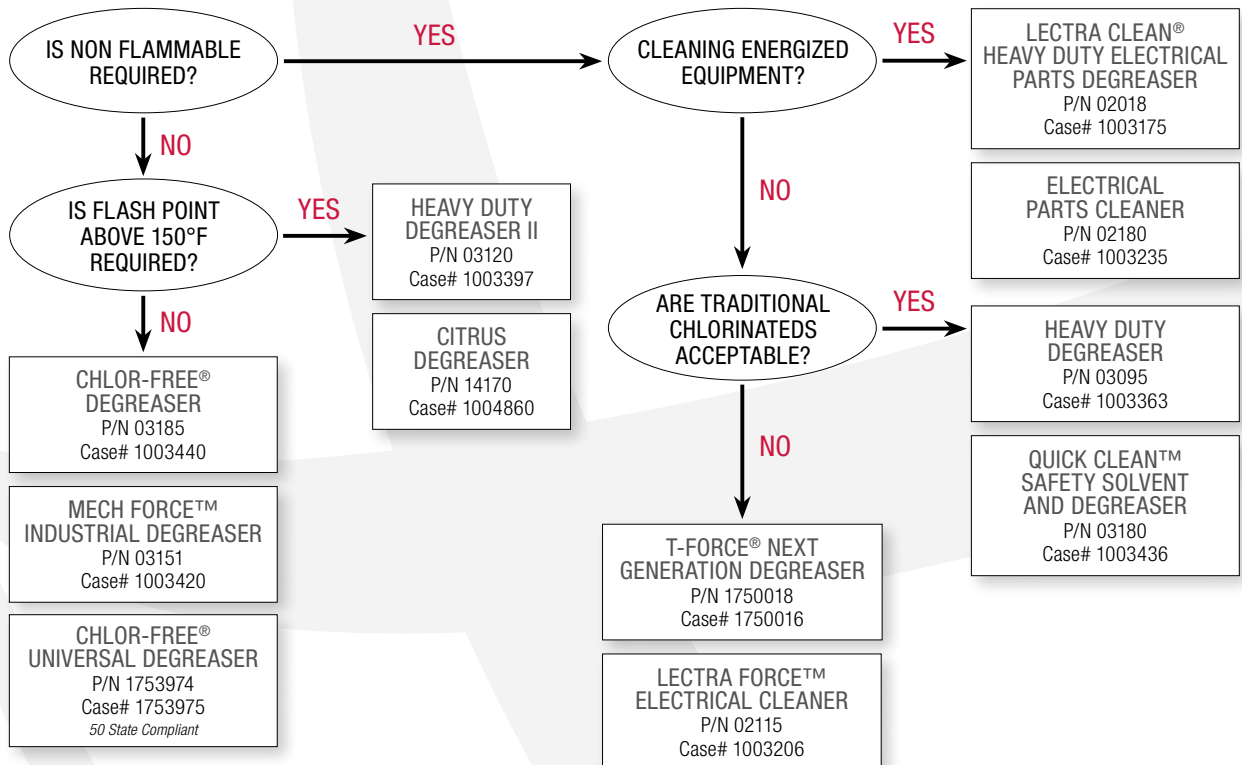

## LOOKING FOR A WATER BASED DEGREASER?

### MULTI-PURPOSE CLEANING

#### pH CHART



**ACIDIC:** Acidic pH products are used to remove calcium, lime, scale, salts and other mineral deposits.

**NEUTRAL**

**ALKALINE:** Alkaline pH products are used to remove oils, grease, fats and proteins.

**HYDROFORCE®  
ALL PURPOSE  
DEGREASER**  
P/N 14406  
Case# 1004955  
pH 10.7

**HYDROFORCE®  
INDUSTRIAL  
STRENGTH  
DEGREASER**  
P/N 14415  
Case# 1004969  
pH 13.01

**HYDROFORCE®  
ZERO VOC  
GENERAL PURPOSE  
DEGREASER**  
P/N 14446  
Case# 1004989  
pH 10.3

**HYDROFORCE®  
BUTYL-FREE ALL  
PURPOSE CLEANER**  
P/N 14401  
Case# 1004948  
pH 12.2

### CLEANING APPLICATION

CLEANING GLASS?

**HYDROFORCE®  
GLASS CLEANER**  
P/N 14412  
Case# 1004965

DISINFECTING?

**HYDROFORCE®  
GERMICIDAL  
FOAM CLEANER**  
P/N 14430  
Case# 1004981

CLEANING STAINLESS  
STEEL?

**HYDROFORCE®  
STAINLESS STEEL  
CLEANER & POLISH**  
P/N 14424  
Case# 1004976

TAR, ADHESIVES, INKS?

**HYDROFORCE®  
SUPER CITRUS™ HEAVY  
DUTY DEGREASER**  
P/N 14440  
Case# 1004983

NSF A1 REQUIREMENT?

**HYDROFORCE®  
ZERO VOC GENERAL  
PURPOSE DEGREASER**  
P/N 14446  
Case# 1004989

**HYDROFORCE®  
BUTYL-FREE ALL  
PURPOSE CLEANER**  
P/N 14401  
Case# 1004948

The pH chart is a scale ranging from 0 to 14 used to measure acidity and alkalinity. The lower the number the more acidic; the higher the number, the more alkaline; 7 is neutral.

# INDUSTRIAL PRECISION CLEANERS

## CONTACT CLEANER 2000®

### Precision Cleaner

An aggressive general-purpose precision cleaner that effectively removes dirt, light oils and other contaminants. It evaporates quickly, leaves no residue and has no flash point. Not recommended for use on Noryl® or polycarbonate type plastics.

Part#	Item#	Case/Order#	Size	Units/cs
03150 <sup>1</sup> ⓘ	1003419	1003418	16 oz aerosol	12



## PF PRECISION CLEANER

Innovative contact cleaner that offers strong cleaning action, fast evaporation and no residue. PF Precision Cleaner has no flash point and is safe to use on plastics.

Part#	Item#	Case/Order#	Size	Units/cs
03190 ⓘ	1003447	1003446	16 oz aerosol	12



## NT™ PRECISION CLEANER

Patented formula NT™ Precision Cleaner effectively removes dirt, light oils and other contaminants from electronic equipment. It evaporates quickly and leaves no residue. NT™ Precision Cleaner has no flash point and is an optimal alternative to HCFC 141b-based cleaners when sensitive plastics are not a concern.

Part#	Item#	Case/Order#	Size	Units/cs
03205 <sup>1</sup> ⓘ	1003461	1003460	16 oz aerosol	12



## ELECTRONIC COMPONENT CLEANER

### Precision Cleaner

Aggressive cleaner for use on electronic components in industrial, electrical and aviation applications. Its high-purity, fast-penetrating formula aggressively dissolves dust, lint, dirt, oils, polar soils and other contaminants from most non-plastic surfaces. It evaporates very rapidly and leaves no residue.

Part#	Item#	Case/Order#	Size	Units/cs
03200 <sup>1</sup> ⓘ	1003455	1003454	16 oz aerosol	12



## XT-2000™

A non-flammable, low-odor and rapidly evaporating precision cleaner for use in electrical and industrial applications. Effectively removes dirt, light oils and other contaminants from electronic equipment.

Part#	Item#	Case/Order#	Size	Units/cs
03155 ⓘ	1003425	1003424	16 oz aerosol	12



## QD® CONTACT CLEANER

A petroleum distillate and alcohol-blended precision cleaner suitable for cleaning sensitive electronics. Evaporates quickly, leaves no residue and is safe to use on all plastics.

Part#	Item#	Case/Order#	Size	Units/cs
03130* ⓘ	1003407	1003406	16 oz aerosol	12
03131* <sup>1</sup>	1003408	1003408	5 gal pail	1
03132* <sup>1</sup>	1003409	1003409	55 gal drum	1



## CONTACT CLEANER

Advanced Technology Formula Contact Cleaner does not contain known ozone depleting substances or VOCs. It provides an optimal alternative to CFC, HCFC, and flammable contact cleaners. Regular use will help prevent electrical failure, increase performance and prolong equipment life. Contact Cleaner will not damage sensitive modern plastics such as Noryl®, ABS and Lexan®.

Part#	Item#	Case/Order#	Size	Units/cs
03070 ⓘ	1003333	1003332	16 oz aerosol	12



## CE™ PRECISION CLEANER

Designed specifically for dissolving and flushing away carbon dust, polar soils, mineral oils and non-polar soils found in elevator rooms and vertical lifts. CE™ Precision Cleaner has a controlled evaporation rate, providing sufficient dwell time to dissolve and flush dirt from surfaces before evaporating without leaving a residue.

Part#	Item#	Case/Order#	Size	Units/cs
14035 ⓘ	1004776	1004775	16 oz aerosol	12



ⓘ – 360° spray valve can be sprayed in the UP or DOWN position.

<sup>1</sup> – Item restricted from sale in some states. See product page on CRC website for specific restrictions.

Noryl® and Lexan® are registered trademarks of SABIC GLOBAL TECHNOLOGIES B.V.

\*This product is labeled extremely flammable. Read and observe the special usage warning on the label. Do not apply while equipment is energized.



## ISOPROPYL ALCOHOL

### Precision Cleaner

A quick-drying light-duty precision cleaner for use in electronic and aviation applications. Its 99% pure formula aggressively dissolves grease, dust, dirt, lint, oils and flux.

Part#	Item#	Case/Order#	Size	Units/cs
03201	1003457	1003456	16 oz aerosol	12



## HF™ CONTACT CLEANER

Petroleum distillate-based precision cleaner that offers the safety of a high flash point without leaving a residue. It may be used on most plastic materials.

Part#	Item#	Case/Order#	Size	Units/cs
03125*	1003404	1003403	16 oz aerosol	12



## CONTACT CLEANER & PROTECTANT

High-purity precision cleaner that helps make equipment perform like new. Penetrates surface pores, cleans away contaminants and leaves a fine microscopic corrosion resistant film.

Part#	Item#	Case/Order#	Size	Units/cs
03140*	1003417	1003416	16 oz aerosol	12



## FOOD GRADE CONTACT CLEANER

Contact cleaner suitable for cleaning sensitive electronics. Evaporates quickly, leaves no residue and is safe to use on all plastics. NSF P1 Registered for use in meat and poultry plants.

Part#	Item#	Case/Order#	Size	Units/cs
N/A	1750989*	1750988	16oz aerosol w/ Perma-Lock®	12



## DUSTER™

### Aerosol Dust Removal System

Safely removes dust from energized equipment without damaging sensitive components or surface finish. Penetrates into cracks and crevices to remove contaminants that normal hand dusting cannot reach. It delivers a powerful blast that removes embedded debris. The extension tube can be used for more precise delivery. Energized equipment use only. Non-flammable and plastic safe.

Part#	Item#	Case/Order#	Size	Units/cs
14085	1004818	1004817	12 oz aerosol trigger	12



## DUSTER™

### Moisture-Free Dust & Lint Remover

Effectively removes dirt, dust, lint and other contaminants with a dry blast of air. Safely eliminates debris from sensitive electronics, appliances and equipment.


Part#	Item#	Case/Order#	Size	Units/cs
05185	1003746	1003744	16 oz aerosol trigger	12



## FREEZE SPRAY

Aerosol coolant system that instantly freezes surfaces to -60°F, dissipating heat and cooling equipment. Freeze Spray also assists in locating thermal intermittent components, failures and shorts. Safe to use on sensitive components and all surface finishes. Freeze Spray comes with an extension tube for precise application of the product.

Part#	Item#	Case/Order#	Size	Units/cs
14086	1004820	1004819	12 oz aerosol trigger	12

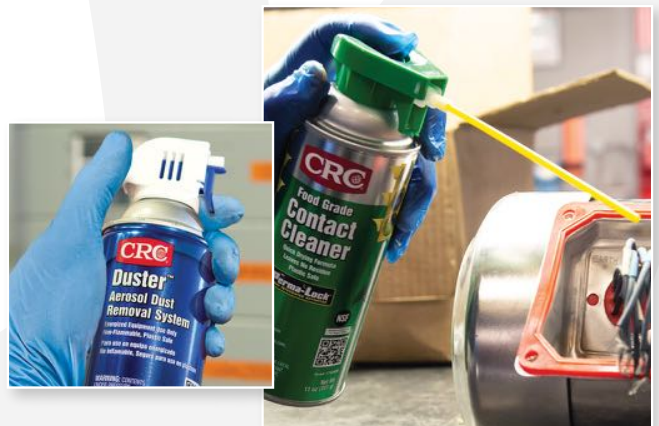

ⓘ — 360° spray valve can be sprayed in the UP or DOWN position.

\*This product is labeled extremely flammable. Read and observe the special usage warning on the label. Do not apply while equipment is energized.

# INDUSTRIAL PRECISION CLEANERS

PRODUCT	Base Type	Flash Point (F)	Evaporation Rate	Dielectric Strength (Volts)	Plastic Safe	SDS Label Attached	NSF Category Code	VOC % <sup>∞</sup>	Container Size
Contact Cleaner 2000® Precision Cleaner	DCE/HFE	None	Fast	26,100 Volts	May be harmful to some plastics	Yes	K2	66.5	
XT-2000™ Precision Cleaner	DCE/HFE	None	Fast	27,780 Volts	Safe on Most Plastics (test small area)	Yes	K2	23.4	
Contact Cleaner	HFE	None	Very Fast	28,750 Volts	Yes	Yes	K2	0	
PF Precision Cleaner	HFE	None	Very Fast	26,360 Volts	Yes	Yes	K2	6	
Electronic Component Cleaner	DCE/HFE	None	Fast	26,100 Volts	May be harmful to some plastics	Yes	K2	66.5	
NT™ Precision Cleaner	DCE/HFE	None	Fast	26,100 Volts	May be harmful to some plastics	Yes	K2	66.5	
QD® Contact Cleaner	Hydrocarbon Solvents	16°F (aerosol) <0°F (bulk)	Very Fast	39,500 Volts (aerosol) 30,500 volts (bulk)	Yes	Yes	P1	74.9	  
CE™ Precision Cleaner	HFC	None	Slow	28,400 Volts	Safe on Most Plastics (test small area)	Yes	K2	16.3	
Isopropyl Alcohol Precision Cleaner	Alcohol	54°F	Very Fast	8,300 Volts	Safe on Most Plastics (test small area)	Yes	K1, K2	74.3	
HF™ Contact Cleaner	Petroleum Distillate	204°F	Slow	45,700 Volts	Safe on Most Plastics (test small area)	Yes	K2	0	
Contact Cleaner & Protectant	Isohexane/Silicone	<0°F	Moderate	350 Volts	Safe on Most Plastics (test small area)	Yes	K2	71.9	
Duster™ Aerosol Dust Removal System	HFC	None	Very Fast	N/A	Yes	No	K2	0	
Duster™ Moisture-Free Dirt & Lint Remover	HFC	-58°F	Fast	N/A	Yes	No	N/A	0	
Freeze Spray	HFC	None	Very Fast	N/A	Yes	No	N/A	0	
Food Grade Contact Cleaner	Heptane	16°F	Very Fast	39,500 Volts	Yes	Yes	P1	74.9	

<sup>∞</sup> – VOC % as defined by Consumer Products VOC regulations



## SUPER DEGREASER™ MUO

Non-conductive, non-corrosive, non-staining and has no flash point. Advanced Technology Formula Super Degreaser™ quickly dissolves grease, oil and sludge for more efficient operation of mechanical equipment. Super Degreaser™ evaporates rapidly and leaves no residue. It is an optimal alternative to 1,1,1-Trichloroethane products. Use with caution on plastics.

Part#	Item#	Case/Order#	Size	Units/cs
03910 <sup>3</sup>	1003514	1003513	20 oz aerosol (MUO)	12



## T-FORCE® DEGREASER

Combines the power of a high-performance, industrial-strength degreaser with lower VOCs. T-Force® Degreaser is non-conductive, non-corrosive, non-staining and has no flash point. It quickly dissolves grease, oil and sludge for more efficient operation of mechanical equipment. T-Force® Degreaser evaporates rapidly, leaves no residue and has a good health and safety profile. Does not contain nPB, TCE or Perc.

Part#	Item#	Case/Order#	Size	Units/cs
03116 <sup>3</sup>	1003392	1003391	1 gal can	4
03117 <sup>3</sup>	1003393	1003393	5 gal pail	1
03118 <sup>3</sup>	1003394	1003394	55 gal drum	1
03915 <sup>3</sup>	1003516	1003515	20 oz aerosol (PowerJet® MUO)	12
03916 <sup>3</sup>	1007981	1003517	20 oz aerosol (Non-flammable MUO)	12



## SUPER DEGREASER™ PLUS

Non-conductive, non-corrosive, non-staining and has no flash point. High cleaning strength quickly dissolves grease, oil and sludge for more efficient operation of mechanical equipment. Evaporates quickly and leaves no residue.

Part#	Item#	Case/Order#	Size	Units/cs
03109 <sup>1</sup>	1003380	1003379	20 oz aerosol	12



## T-FORCE® NEXT GENERATION DEGREASER

Combines the power of a high-performance, industrial-strength degreaser with lower VOCs. It is non-conductive, non-corrosive and non-staining and has no flash point.

Part#	Item#	Case/Order#	Size	Units/cs
N/A	1750018 <sup>1</sup>	1750016	20 oz aerosol	12



## HEAVY DUTY DEGREASER

Quickly and effectively removes grease, oil, tar, dirt, grime, corrosion, sludge and other stubborn substances to increase operating efficiency of equipment. Heavy Duty Degreaser offers quick and efficient degreasing action and fast evaporation with no residue and no flash point. Use with caution on plastics.

Part#	Item#	Case/Order#	Size	Units/cs
03095 <sup>1</sup>	1003364	1003363	20 oz aerosol	12
03995 <sup>3</sup>	1003521	1003520	20 oz aerosol (MUO)	12



1 – Item restricted from sale in some states and counties. See product page on CRC website for specific restrictions.  
3 – Not for retail sale, for use in manufacturing establishments only.

# INDUSTRIAL HEAVY DUTY DEGREASERS

## QUICK CLEAN™

### Safety Solvent and Degreaser

Effective heavy-duty degreaser provides strong degreasing action, fast evaporation and no residue. It is non-flammable and does not contain VOCs. Use with caution on plastics and paints. Test on a small area before use.

Part#	Item#	Case/Order#	Size	Units/cs
03180 <sup>1</sup>	1003437	1003436	20 oz aerosol	12



## CITRUS DEGREASER

A unique heavy-duty degreaser that is extremely effective for dissolving and removing grease, oil, lubricants and contaminants without requiring water wash off and without leaving a residue. Use with caution on plastics and paints.

Part#	Item#	Case/Order#	Size	Units/cs
14170 <sup>1</sup>	1004861	1004860	20 oz aerosol	12
14970 <sup>3*</sup>	1005158	1005157	20 oz aerosol (MUO)	12
14171 <sup>3</sup>	1004863	1004862	16 oz non-aerosol can w/trigger	12
14172 <sup>3</sup>	1004865	1004864	1 gal bottle	4
14174 <sup>3</sup>	1004867	1004867	55 gal drum	1



## CHLOR-FREE® DEGREASER

Innovative heavy-duty non-chlorinated degreasing solvent that removes oil, grease and other contaminants. Excellent for use where rapid turn-around is necessary and low flash point solvents can be used.

Part#	Item#	Case/Order#	Size	Units/cs
03185 <sup>1*</sup>	1003441	1003440	20 oz aerosol	12
03985 <sup>3*</sup>	1003519	1003518	20 oz aerosol (MUO)	12
03189 <sup>3*</sup>	1003445	1003444	16 oz non-aerosol w/trigger	12



## NATURAL DEGREASER™

### Citrus Based Degreaser

Specially formulated degreaser that offers the natural cleaning power of citrus. It does not require water wash-off, and does not leave a sticky residue commonly associated with citrus-based cleaners. Natural Degreaser™ Citrus Based Degreaser contains no chlorinated solvents. Use with caution on plastics and paints.

Part#	Item#	Case/Order#	Size	Units/cs
14005	1004762	1004761	20 oz aerosol	12



## CHLOR-FREE® UNIVERSAL DEGREASER

A 50-state compliant, low VOC, and non-chlorinated degreaser for use in industrial applications. This new and innovative product aggressively dissolves grease, dirt and oils for effective cleaning of surfaces. The fast evaporation provides rapid turnaround when a low flashpoint is acceptable. The PowerJet® Spray Nozzle penetrates and blasts away contaminants quickly.

Part#	Item#	Case/Order#	Size	Units/cs
N/A	1753974	1753975	20 oz aerosol	12



## HEAVY DUTY DEGREASER II

An excellent alternative for cleaning applications where chlorinated solvents are not acceptable. Heavy Duty Degreaser II effectively removes soils and cleans surfaces without residue build-up. Use with caution on plastics.

Part#	Item#	Case/Order#	Size	Units/cs
03120	1003398	1003397	20 oz aerosol	12




## MECH FORCE™

### Industrial Degreaser

An innovative, non-chlorinated heavy-duty degreaser that removes oil, grease and other contaminants. This fast-evaporating solvent is excellent for use where rapid turn-around is necessary and low flash point solvents can be used. It offers a high permissible exposure limit.

Part#	Item#	Case/Order#	Size	Units/cs
03151 <sup>1</sup>	1003421	1003420	20 oz aerosol	12

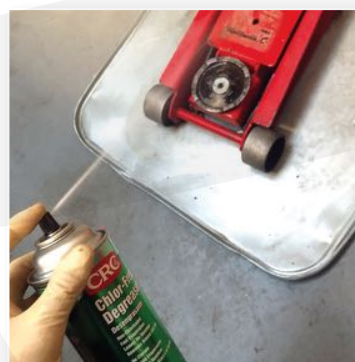

<sup>1</sup> – 360° spray valve can be sprayed in the UP or DOWN position.

<sup>1</sup> – Item restricted from sale in some states. See product page on CRC website for specific restrictions.

<sup>3</sup> – Not for retail sale, for use in manufacturing establishments only.

\*This product is labeled extremely flammable. Read and observe the special usage warning on the label. Do not apply while equipment is energized.

## BATTERY CLEANER

Water-soluble formula designed to remove corrosion quickly and economically while neutralizing acid spills. Use to restore battery output and reduce voltage leakage due to contaminants.

Part#	Item#	Case/Order#	Size	Units/cs
03176	1003435	1003434	12 oz aerosol	12



## INDUSTRIAL ADHESIVE REMOVER

Ideal for removing adhesive residue, tar, wax or other contaminants. Its penetrating formula can help remove stubborn labels and tape from multiple surfaces. VOC compliant in all 50 states<sup>∞</sup>.

Part#	Item#	Case/Order#	Size	Units/cs
03250	1003473	1003472	20 oz aerosol	12



## FOAMING COIL CLEANER

High-performance, heavy-duty foaming detergent designed to clean evaporator and condenser coils. The aggressive alkaline detergent blend quickly cuts through dirt, grease, oil and other types of residue. Low-odor formula.

Part#	Item#	Case/Order#	Size	Units/cs
03196	1003453	1003452	20 oz aerosol	12



## CARB & CHOKE CLEANER

Low-VOC formula designed to maximize carburetor performance, improve fuel system performance and ensure maximum fuel economy.

Part#	Item#	Case/Order#	Size	Units/cs
03077*	1003337	1003336	16 oz aerosol	12




## GASKET REMOVER

### Paint and Decal Remover

Solvent-based, high-strength cleaner that removes baked-on fiber gaskets, gasket adhesives and sealants. Dissolves and aids in the removal of paints, lacquers and varnish. Removes graffiti from metal and stone.

Part#	Item#	Case/Order#	Size	Units/cs
03017	1003266	1003265	16 oz aerosol	12

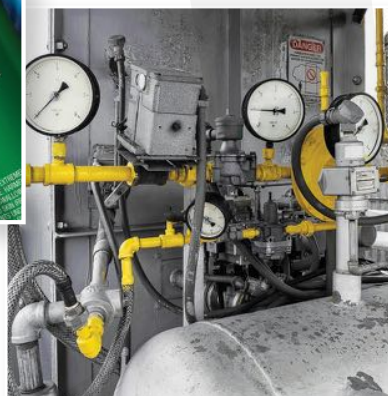

🌀 – 360° spray valve can be sprayed in the UP or DOWN position.

∞ – As defined by Consumer Products VOC regulations.

\*This product is labeled extremely flammable. Read and observe the special usage warning on the label. Do not apply while equipment is energized.

# INDUSTRIAL HEAVY DUTY DEGREASERS

PRODUCT	Base Type	Cleaning Strength (KB)	Flash Point (F)	Evaporation Rate	Dielectric Strength (Volts)	VOC % <sup>∞</sup>	NSF Category Code	SDS Label Attached	Container Size
Super Degreaser™ Plus	DCE/HFE	31	None	Fast	25,790 Volts	49.8	K1	Yes	
Super Degreaser™ MUO	DCE/HFE	125	None	Fast	26,800 Volts	96.12 (MUO)	K1 (MUO)	Yes	
Heavy Duty Degreaser	Chlorinated	95	None	Fast	15,710 Volts	7.8	K1	Yes	
T-Force® Degreaser Non-Flammable MUO	DCE/HFE	75	None	Fast	27,510 Volts	72	K1	Yes	
T-Force® Degreaser MUO	DCE/HFE	91	None	Fast	29,010 Volts	81.6	K1	Yes	
T-Force® Next Generation Degreaser	DCE/HFE	31	None	Fast	25,790 Volts	49.8	K1	Yes	
T-Force® Degreaser	DCE/HFC	91	None	Fast	29,100 Volts	85	K1	No	
Quick Clean™ Safety Solvent and Degreaser	Chlorinated	95	None	Very Fast	37,500 Volts	0	K1	Yes	
Chlor-Free® Degreaser	Blend of non-chlorinated organic solvents	106	<0°F	Fast	6,000 Volts (aerosol) 20,800 Volts (non-aerosol) 20,800 Volts	46.3 (aerosol) 100 (non-aerosol) 96 (MUO)	K2 K2 K1	Yes Yes Yes	
Chlor-Free® Universal Degreaser	Organic Solvent/ Alcohol	139	-4.0°F	Fast	ND	9.5%	K1	Yes	
Mech Force™	Blend of non-chlorinated organic solvents	>200	<0°F	Fast	6,600 Volts	46	K1	Yes	
Citrus Degreaser	d-limonene & Petroleum Distillate	32	170°F	Slow	58,600 Volts	9.8	C1	Yes	
Citrus Degreaser Bulk & MUO	d-limonene & Petroleum Distillate	54	100°F	Fast	35,000 Volts	96.5 (MUO) 100 (bulk)	C1	No (bulk) Yes (MUO)	
Natural Degreaser™	Glycol Ether	>200	150°F	Slow	28,600 Volts	9.7	C1	Yes	
Heavy Duty Degreaser II	Petroleum Distillate	75	185°F	Slow	42,100 Volts	0	K1, K2	Yes No	
Battery Cleaner	Water-Based	N/A	None	Slow	N/A	7.9	N/A	Yes	
Gasket Remover	Organic Solvents	N/A	56°F	Fast	N/A	47.5	C3	Yes	
Foaming Coil Cleaner	Water-Based	N/A	None	Slow	N/A	10.2	A1, C1	Yes	
Industrial Adhesive Remover	Petroleum Distillate	75	185°F	Slow	42,100 Volts	0	K3	Yes	
Carb & Choke Cleaner	Organic Solvents	>200	<0°F	Fast	6,300 Volts	9.2	N/A	Yes	

NA = Not Applicable; KB = Kauri Butanol; ND = Not Determined  
<sup>∞</sup> – VOC % as defined by Consumer Products VOC regulations



### HYDROFORCE® INDUSTRIAL STRENGTH DEGREASER

Aqueous degreaser with the powerful performance of a solvent. Upon contact, HydroForce® Industrial Strength Degreaser instantly begins to hunt-down, break-up and lift-off heavy deposits of grease, oil and dirt. It exhibits a unique spreadability. Perfect for facilities seeking an alternative to traditional solvents.

Part#	Item#	Case/Order#	Size	Units/cs
14415 <sup>1</sup>	1004970	1004969	32 oz trigger spray bottle	12



### HYDROFORCE® BUTYL-FREE ALL PURPOSE CLEANER

Butyl-free cleaner that is versatile enough for all of your cleaning tasks, but strong enough to attack and remove tough dirt, dust and grime deposits. Perfect for facilities seeking an efficient all-purpose cleaner with maximum regulatory compliance.

Part#	Item#	Case/Order#	Size	Units/cs
14401	1004949	1004948	32 oz trigger spray bottle	12



### HYDROFORCE® ALL PURPOSE DEGREASER

Versatile enough to use for all degreasing tasks. HydroForce® All Purpose Degreaser breaks-up and lifts-off grease, oil and dirt deposits. Perfect for facilities seeking an improvement over their current all-purpose aqueous degreaser.

Part#	Item#	Case/Order#	Size	Units/cs
14406	1004956	1004955	20 oz aerosol	12
14407 <sup>1</sup>	1004958	1004957	32 oz trigger spray bottle	12



### HYDROFORCE® GLASS CLEANER Professional Strength

Versatile enough to use on your most delicate glass surfaces, but strong enough to quickly cut through the toughest dirt, dust, fingerprint and haze deposits without streaking. Its ammonia-fortified formula contains a foaming agent for greater coverage and less run-off when cleaning vertical surfaces.

Part#	Item#	Case/Order#	Size	Units/cs
14412	1004966	1004965	20 oz aerosol	12



### HYDROFORCE® ZERO VOC General Purpose Cleaner

Provides maximum regulatory compliance without performance compromises. It is strong enough to attack and remove tough dirt, dust and grime deposits; yet its moderate pH formula, and zero VOC content make it versatile and safer to use daily for all your cleaning tasks. Formulated with a special polymer that keeps dirt and greasy soils from returning to surfaces.


Part#	Item#	Case/Order#	Size	Units/cs
14446	1004990	1004989	32 oz trigger spray bottle	12



### HYDROFORCE® SUPER CITRUS™ HEAVY DUTY DEGREASER

Naturally formulated degreaser that offers the superb cleaning power of citrus. HydroForce® Super Citrus™ Heavy Duty Degreaser dissolves grease, oil, ink, tar, asphalt and many other industrial residues.

Part#	Item#	Case/Order#	Size	Units/cs
14440	1004984	1004983	20 oz aerosol	12
14441	1004986	1004985	1 gal bottle	4
14443	1004988	1004988	55 gal drum	1



### HYDROFORCE® STAINLESS STEEL CLEANER & POLISH

Using an exclusive ultra-shine formula, HydroForce® Stainless Steel Cleaner & Polish eliminates dirt, dust, fingerprints and watermarks and leaves behind a protective, non-greasy barrier that resists the return of these stains. Created specifically for industrial applications, Stainless Steel Cleaner is formulated with powerful cleaning agents designed to out-clean, out-shine and out-perform competing janitorial stainless steel cleaners.

Part#	Item#	Case/Order#	Size	Units/cs
14424	1004977	1004976	20 oz aerosol	12



### HYDROFORCE® GERMICIDAL FOAM CLEANER

Cleans, disinfects and deodorizes in one easy step. The rich, foamy aqueous based formula clings to vertical or inverted surfaces without runs or drips. HydroForce® Germicidal Foam Cleaner contains powerful cleaning agents that instantly lift off and eliminate dirt, dust, grease and grime. For sale in U.S. and Puerto Rico only.








Part#	Item#	Case/Order#	Size	Units/cs
14430	1004982	1004981	20 oz aerosol	12



<sup>1</sup> – Item restricted from sale in some states. See product page on CRC website for specific restrictions.



# AQUEOUS CLEANERS

PRODUCT	Base Type	pH	Flash Point (F)	NSF Category Code	Odor	Container Size
HydroForce® Industrial Strength Degreaser	Alkaline H <sub>2</sub> O Surfactant	13.1	None	C1	Pleasant	
HydroForce® All Purpose Degreaser	H <sub>2</sub> O Surfactant	10.7 (aerosol) 10.2 (bulk)	None	C1	Pleasant	 
HydroForce® Zero VOC General Purpose Cleaner	H <sub>2</sub> O Surfactant	10.3	None	A1	Mild Detergent	
HydroForce® Butyl-Free All Purpose Cleaner	H <sub>2</sub> O Surfactant	12.2	None	A1, C1	Surfactant	
HydroForce® Super Citrus™ Heavy Duty Degreaser	Solvent in H <sub>2</sub> O Emulsion (aerosol) Solvent Based Dilutable in H <sub>2</sub> O (bulk)	10 (aerosol)	None (aerosol) 190°F (bulk)	C1	Citrus	  
HydroForce® Glass Cleaner Professional Strength	H <sub>2</sub> O Surfactant	10.5	None	C1	Ammonia	
HydroForce® Germicidal Foam Cleaner	H <sub>2</sub> O Surfactant	12.3	53°F	C1	Fruity	
HydroForce® Stainless Steel Cleaner & Polish	Solvent/Oil in H <sub>2</sub> O Emulsion	10.5	None	C1	Mild Petroleum	



## THE CRC SMARTWASHER® A SMARTER & SAFER SOLUTION

The CRC SmartWasher® is a manual parts washer that replaces traditional solvent or aqueous alternatives. Its non-hazardous, non-flammable, water-based degreasing solution offers superior cleaning performance that's just as powerful as solvent-based solutions, and it's safer for the user.

The CRC SmartWasher® meets the parts cleaning needs of modern businesses, while eliminating the hassle and cost of solvent waste disposal. The natural process of bioremediation breaks down and converts oil, grease and carbon-based contaminants into harmless by-products of CO<sub>2</sub> and water.

The bioremediation process reduces liquid hazardous waste streams and reduces the release of harmful pollutants into the environment.



INDUSTRIAL CLEANERS

SMARTWASHER®

## AN EASY & EFFECTIVE 3-STEP SOLUTION

1



### The SmartWasher®

A high-quality, durable Parts Washer that heats the OzzyJuice® fluid and allows for the magic of bioremediation to take place. Designed specifically for heavy duty applications, with the flexibility to suit almost any working environment.

2



### The OzzyJuice®

A water-based, industrial strength, pH neutral, non-corrosive and non-flammable cleaning fluid for use in the CRC SmartWasher® system. The advanced OzzyJuice® formula cleans as well, if not better, than traditional solvent technologies. All OzzyJuice® solutions are NSF A1 Registered.

3



### The OzzyMat®

A revolutionary, Multi-Layer Filter Mat that not only traps particulates, but most importantly contains the advanced Microbes that will fall into the OzzyJuice® solution as it passes through. The microbes then get to work breaking down and cleaning the fluid so it can be re-used over and over again.

## CERTIFICATION & APPROVALS

The SmartWasher® system is a safer and highly-effective alternative to manual solvent and aqueous-based parts washers. It makes operations better and safer for the user and the environment. All OzzyJuice® solutions used in the SmartWasher® are non-corrosive, pH-neutral, non-flammable and non-hazardous. When used in accordance with directions, the SmartWasher® system does not generate hazardous waste or potential for cradle-to-grave legal liability.

### Clean Air Solvent Certificate

OzzyJuice® products certified "Clean Air Products" by SCAQMD (South Coast Air Quality Management District) include SW-3, SW-4, SW-7, and SW-8.

### Meets US EPA Safer Product Standards

OzzyJuice® SW-4 and OzzyBooster® Microbial Enhancer have been awarded the SAFER CHOICE label and seal of approval by the EPA.

### NSF Registered Products

All OzzyJuice® formulas are registered A1 for use in food manufacturing facilities.



# SMARTWASHER® PARTS CLEANING SYSTEM



## SW-23 MOBILE PARTS/BRAKE WASHER

SW-23 – fits every application with its unique design and features, large sink size, and mobility. It includes an extra long angled brush/hose for those hard to reach places and a customized dolly with a footstep for easy movement.

Part#	Case/Order#	Unit Size	Units/cs
14161	1004858	43"H x 42"W x 27"D	1

## SW-25 SIGNATURE PARTS WASHER

SW-25 – features toggle switch controls, a flow control timer, adjustable thermostat, larger capacity stationary unit.

Part#	Case/Order#	Unit Size	Units/cs
14145	1004852	43"H x 35"W x 26"D	1

## SW-28 SUPERSINK PARTS WASHER

SW-28 – loaded with features and includes an extra large work surface for all jobs. A second workstation can easily be added allowing two people to work at the same time.

Part#	Case/Order#	Unit Size	Units/cs
14144	1004851	47"H x 42"W x 38"D	1

## SW-28XE SUPERSINK XE PARTS WASHER

SW-28XE – fully loaded with an extra large work surface and two work/brush stations. A light kit and parts basket are also standard equipment with this model.

Part#	Case/Order#	Unit Size	Units/cs
14710	1005003	47"H x 42"W x 38"D	1

## SW-37 MOBILE HEAVYWEIGHT PARTS WASHER

SW-37 – features a 1000 lbs. load capacity. It's tough enough for the big jobs and can easily be moved through the shop area on its mobile dolly or can stay in place with locking casters. It has a large, oversized sink to accommodate multi-sized parts.

Part#	Case/Order#	Unit Size	Units/cs
14162	1004859	49"H x 48"W x 35"D	1

## SMARTWASHER® BENCHTOPPRO® Bioremediating Parts Washer

The BenchtopPRO® is a bench-top parts washer for the small shop or home garage when a standard SmartWasher® unit is too large. Featuring bioremediation technology and a solvent-free professional grade cleaning solution, the BenchtopPRO® cleans greasy, dirty, oily parts without the need for waste disposal. Non-hazardous and non-flammable, this revolutionary parts washer offers a safer alternative to hazardous solvents without compromising cleaning performance. CLEAN. CLOSE. STORE.™

Part#	Case/Order#	Unit Size	Units/cs
N/A	1000872	12.63"H x 28.38"W x 17.25"D	1

## SINK COVERS

Heavy-duty woven fabric withstands industrial and shop environments to keep dust and dirt out of the SmartWasher® sink.

Part#	Case/Order#	Description	Units/cs
14889	1005152	Cover for SmartWasher® SW-23 Mobile Parts Washer Fits 14161	1
14890	1005153	Cover for SmartWasher® SW-25 Signature Parts Washer Fits 14145	1
14891	1005154	Cover for SmartWasher® SW-28 SuperSink Parts Washer Fits 14144	1
14892	1005155	Cover for SmartWasher® SW-28-XE SuperSink Parts Washer Fits 14710	1
14893	1005156	Cover for SmartWasher® SW-37 Mobile Heavyweight Parts Washer Fits 14162	1

## OZZYJUICE® DEGREASING/ CLEANING SOLUTION

OzzyJuice® is a powerful, aqueous-based degreasing/cleaning solution that is pH-neutral, non-irritating, non-flammable and non-hazardous. Armed with superior cleaning capability, OzzyJuice® solutions will match or surpass the performance of premium solvents without the associated risks. All OzzyJuice® solutions are NSF A1 Registered.

Part#	Case/Order#	Description	Size	Units/cs
14720	1005005	SW-3 Truck Grade Degreasing Solution	5 gal pail	1
14726	1005011	SW-3 Truck Grade Degreasing Solution	55 gal drum	1
14148	1004853	SW-4 Heavy Duty Degreasing Solution	5 gal pail	1
14728	1005013	SW-4 Heavy Duty Degreasing Solution	55 gal drum	1
14721	1005006	SW-7 Parts/Brake Cleaning Solution	5 gal pail	1
14723	1005008	SW-7 Parts/Brake Cleaning Solution	55 gal drum	1
14722	1005007	SW-8 Aircraft, Weapons & Select Metals Degreasing Solution	5 gal pail	1
14724	1005009	SW-8 Aircraft, Weapons & Select Metals Degreasing Solution	55 gal drum	1
N/A	1751304	SW-X1 High Performance Degreasing Solution	5 gal pail	1
N/A	1751309	SW-X1 High Performance Degreasing Solution	55 gal drum	1



## FL-4 OZZYMAT® MULTI-LAYER FLUID ACTIVATION MAT

Designed for applications with normal to heavy usage, the FL-4 Multi-Layer OzzyMat® has (4) white layers and (1) blue layer. The white layers on the mat trap any particulate larger than 50 microns and should be peeled away once per week for optimum performance. The blue layer is the support structure that contains the microbes (Ozzy®) and delivers them into the system. These microbes (Ozzy®) migrate from the OzzyMat® into the OzzyJuice®, located in the SmartWasher® tank, and break down oil and grease.



Part#	Item#	Case/Order#	Description	Units/cs
14124	1004844	1004843	FL-4 OzzyMat® Multi-Layer Fluid Activation Mat	6

## OZZYBOOSTER® Microbial Enhancer

OzzyBooster® is a microbial enhancer that can be used to enhance or "boost" microbial activity in the SmartWasher® system. It increases the density of Ozzy® (microbes) within the OzzyJuice®. When a machine is overused, there may be a need for extra microbes to help ease the load.

Part#	Item#	Case/Order#	Size	Units/cs
14131	1007982	1004849	8.5 oz Bottle	6



## ODOR NEUTRALIZER

Odor Neutralizer treats entire unit to reduce or eliminate any odors which may occur from standard parts washing.

Part#	Item#	Case/Order#	Size	Units/cs
14132	1752727	1004850	4 oz Bottle	4



## DEFOAMER

The only Defoamer proven safe for use in the CRC SmartWasher® without harming Ozzy® Microbes.

Part#	Item#	Case/Order#	Size	Units/cs
14849	1005117	1752725	4 oz Bottle	4



## SMARTWASHER® START-UP KITS

Each SmartWasher® can be ordered as a complete start-up kit. Each kit contains the solution and the filter necessary to get you up and running quickly. Select the SmartWasher® model and solution type based on your cleaning needs. Please visit our website, , and search "kit" for options.



Spare wrench available, Legacy# 14885/ Case/Order# 1005147.  
Wrench is used to easily open OzzyJuice® containers.



## PENETRATING

### KNOCK'ER LOOSE®

#### Penetrating Solvent

An industrial-strength lubricant and penetrant designed to quickly loosen and free seized, bound or frozen fasteners. It quickly dissolves rust, scale, gum, grease and corrosion with a formula that creeps into cracks, seams, threads and joints better than any other penetrant brands. Eases the disassembly of machinery, tools and equipment for routine maintenance and emergency repairs.

Part#	Item#	Case/Order#	Size	Units/cs
03020	1003270	1003269	16 oz aerosol	12
03024	1003276	1003275	16 oz non-aerosol w/trigger	12



### KNOCK'ER LOOSE® PLUS

#### Penetrating Solvent

A unique penetrant that immediately drops the temperature of the area in contact with the spray. The freeze-shock action cracks rusted surfaces, allowing Knock'er Loose® Plus to reach deeper and work more effectively than other penetrants.


Part#	Item#	Case/Order#	Size	Units/cs
03027	1003280	1003279	20 oz aerosol	12



### SCREWLOOSE® SUPER PENETRANT

Quickly penetrates through rust and corrosion to rapidly free corroded bolts, screws, fasteners, pins and bound mechanisms. Eases disassembly of mechanical equipment, fittings and fixtures.

Part#	Item#	Case/Order#	Size	Units/cs
03060	1003322	1003321	16 oz aerosol	12



⚠ – 360° spray valve can be sprayed in the UP or DOWN position.

\*This product is labeled extremely flammable. Read and observe the special usage warning on the label. Do not apply while equipment is energized.

## MULTI-PURPOSE

### 3-36®

#### Multi-Purpose Lubricant and Corrosion Inhibitor

Multi-purpose lubricant, penetrant and corrosion inhibitor forms a clear, thin film that lubricates, prevents corrosion, displaces moisture and penetrates. Drives out moisture and leaves a thin, long-lasting film to protect against corrosion.

Part#	Item#	Case/Order#	Size	Units/cs
03005	1003255	1003254	16 oz aerosol	12
03007	1003259	1003258	16 oz non-aerosol bottle	12
03006	1003257	1003256	1 gal bottle	4
03009	1003261	1003261	5 gal pail	1
03011	1003262	1003262	55 gal drum	1



### ULTRA-LITE 3-36®

An ultra-thin, non-staining dry film lubricant that resists oil, dust and dirt build-up. Penetrates into the most minute openings, sealing out moisture and preventing corrosion with an ultra-light protective film.

Part#	Item#	Case/Order#	Size	Units/cs
03160	1003427	1003426	16 oz aerosol	12



### TECHNICAL GRADE 3-36®

#### Multi-Purpose Precision Lubricant

Multi-purpose, plastic-safe lubricant, penetrant and corrosion inhibitor that helps prevent electrical malfunctions caused by water penetration, humidity, condensation or corrosion. It drives out moisture and leaves a thin, long-lasting film to protect against corrosion. Excellent for use around modern plastics and insulators.

Part#	Item#	Case/Order#	Size	Units/cs
03003	1003251	1003250	16 oz aerosol	12



### DRY PTFE LUBE

A multi-purpose, micro-thin film containing PTFE. Dry PTFE Lube penetrates and bonds to most surfaces including metal, wood, rubber, plastic and glass. It forms a micro-thin film that prevents sticking, reducing friction and wear.

Part#	Item#	Case/Order#	Size	Units/cs
03044	1003302	1003301	16 oz aerosol	12





PRODUCT	Base Type	Film Type	Color	360° Spray	Falex (In Pounds)	Flash Point (F)	NSF Category Code	SDS Label Attached	Container Size
<b>Knock'er Loose®</b>	Petroleum	Non-Drying	Reddish	Yes	N/A	147°F	H2	Yes	16 16
<b>Knock'er Loose® Plus</b>	Petroleum	Non-Drying	Orange	Yes	N/A	147°F	H2	Yes	20
<b>Screwloose® Super Penetrant</b>	Petroleum	Non-Drying	Light Amber	Yes	N/A	141°F	H2	Yes	16
<b>3-36®</b>	Petroleum	Non-Drying	Blue-Green	Yes	1000	192°F	H2	Yes	16 16 1 5 55
<b>Ultra-Lite 3-36®</b>	Petroleum	Dry, Ultra-Thin	Amber	Yes	1000	194°F	H2	Yes	16
<b>Technical Grade 3-36®</b>	Petroleum	Non-Drying	Amber	Yes	1500	200°F	H2	Yes	16
<b>Dry PTFE Lube</b>	Alcohol/PTFE	Dry, Micro-Thin	White	No	N/A	<20°F	H2	Yes	16
<b>Power Lube®</b>	Petroleum/PTFE	Non-Drying	Light Amber	No	up to 4500	<20°F	H2	Yes	16

## POWER LUBE®

### High-Performance Lubricant w/PTFE

High-performance, multi-purpose lubricant with the benefits of PTFE to provide long-lasting lubrication and protection against friction, wear and corrosion. Will increase the life and operating efficiency of parts and equipment, as well as withstand extreme load-carrying situations. Up to 4500 lbs in Falex test.

Part#	Item#	Case/Order#	Size	Units/cs
03045*	1003304	1003303	16 oz aerosol	12



## FOOD GRADE MACHINE OIL

Extremely efficient and effective general purpose lubricant for use on food processing equipment. Food Grade Machine Oil penetrates and loosens rust, scale, dirt and corrosion to free parts and fasteners.

Part#	Item#	Case/Order#	Size	Units/cs
03081	1003343	1003342	16 oz aerosol w/Perma-Lock®	12



## FOOD GRADE: NSF H1 REGISTERED

### FOOD GRADE SILICONE

Multi-purpose silicone spray for food processing and handling applications. It forms a colorless, odorless, non-staining film that lubricates and insulates in most metal to non-metal applications. Silicone film eliminates binding and sticking, while protecting most surfaces.

Part#	Item#	Case/Order#	Size	Units/cs
030393*	1003294	1003293	16 oz non-aerosol trigger can	12
03040*	1003296	1003295	16 oz aerosol w/Perma-Lock®	12
030413*	1003298	1003298	5 gal pail	1
030423*	1003299	1003299	55 gal drum	1



## FOOD GRADE PENETRATING OIL

An effective and efficient general purpose penetrant for use on food processing equipment. The highly refined white mineral oil is colorless and odorless to meet NSF and FDA standards. Food Grade Penetrating Oil can be used to loosen rust, scale and corrosion around fasteners and hose fittings on food processing equipment.

Part#	Item#	Case/Order#	Size	Units/cs
03086	1003355	1003354	16 oz aerosol w/Perma-Lock®	12



3 – Not for retail sale, for use in manufacturing establishments only.

\*This product is labeled extremely flammable. Read and observe the special usage warning on the label. Do not apply while equipment is energized.

# LUBRICANTS

## FOOD GRADE WHITE GREASE

A high-purity, high-quality aluminum complex grease that provides superior lubrication and durability in many food and pharmaceutical processing applications. Designed for heavy load applications requiring a long grease life. Protects equipment against rust, oxidation and wear.

Part#	Item#	Case/Order#	Size	Units/cs
03038*	1003292	1003291	16 oz aerosol w/Perma-Lock®	12



## WATER BASED SILICONE

Non-flammable, NSF H1 Registered multi-purpose silicone spray for food processing and handling applications. It forms a white emulsion that is odorless and non-staining. It lubricates and protects in most metal to non-metal applications. Water Based Silicone is a silicone-rich formula that eliminates binding and sticking, while protecting most surfaces.

Part#	Item#	Case/Order#	Size	Units/cs
03035	1003289	1003288	16 oz aerosol w/Perma-Lock®	12



## SYNTHA-TECH™ LUBRICANT WITH PTFE

A unique blend of synthetic lubricants that utilizes PTFE, anti-wear and extreme pressure additives to increase equipment life and performance. This food-grade synthetic lubricant is NSF H1 Registered for use in meat and poultry facilities. Additionally, its long-lasting film minimizes surface contact, thereby extending lubricating intervals.


Part#	Item#	Case/Order#	Size	Units/cs
03054	1003310	1003309	16 oz aerosol w/Perma-Lock®	12



## FOOD GRADE DIELECTRIC GREASE

Lubricates, waterproofs and insulates with a thin, non-curing silicone compound. Dielectric Grease also provides an exceptional lubricant for fasteners used to support temporary electrical work. Excellent for lubricating and sealing rubber and plastic parts – including o-rings. Great for use in food processing environments where there may be a chance of incidental food contact.

Part#	Item#	Case/Order#	Size	Units/cs
03085	1003353	1003352	6 oz pressurized can w/ Select-A-BEAD® Nozzle	12



## FOOD GRADE CHAIN LUBE

A special blend of synthetic lubricants and mineral oil designed to keep roller drive and conveyor chains lubricated. It is specifically designed to provide the convenience of aerosol application where incidental food contact may occur. Food Grade Chain Lube penetrates, lubricates and protects moving parts by reducing friction and wear.

Part#	Item#	Case/Order#	Size	Units/cs
03055	1003313	1003312	16 oz aerosol w/Perma-Lock®	12



## FOOD GRADE AIR TOOL OIL

A fully synthetic food-grade oil that is formulated with the highest quality polyalphaolefin (PAO) base oil to meet the lubrication requirements of air line equipment.

Part#	Item#	Case/Order#	Size	Units/cs
SL2300	1007792	1007791	1 qt bottle	6



## FOOD GRADE BELT DRESSING

Provides a temporary, food-grade, synthetic treatment for worn belts. Extends belt life by reducing slippage, hardening, glazing, dirt build-up and friction. Belt Dressing can be used on leather, rubber, canvas or fabric, and is ideally suited for flat, round and V-belts. Improves traction and reduces belt tension, relieving stress on motors, shafts and wheels for improved operating efficiency.

Part#	Item#	Case/Order#	Size	Units/cs
03065*	1003326	1003325	16 oz aerosol w/Perma-Lock®	12



PREVENTION.  
NOT DETECTION.®

### LOCKED IN FOR SAFETY INTEGRATED DESIGN POINTS:

- Secure Spray Straw Locks into Place
- Convenient No-Slip Grip
- Use All Locking Features
- Wide Spray in the "Down" Position
- Precision Spray in the "Up" Position

\*This product is labeled extremely flammable. Read and observe the special usage warning on the label. Do not apply while equipment is energized.

PRODUCT	Base Type	Film Type	Color	Perma-Lock® Actuator	Flash Point (F)	NSF Category Code	SDS Label Attached	Container Size
Food Grade Silicone	Silicone	Dry, Non-Hardening	Clear	Yes	<0°F	H1	Yes	16 16 5 55
Food Grade Machine Oil	Mineral Oil	Non-drying	Clear	Yes	200°F	H1	Yes	16
Food Grade Penetrating Oil	Mineral Oil	Non-drying	Clear	Yes	200°F	H1	Yes	16
Food Grade White Grease	Aluminum Complex	Non-drying Grease	White	Yes	17.6°F	H1	Yes	16
Syntha-Tech™ Lubricant with PTFE	Polyolefin/PTFE	Non-drying	White	Yes	117°F	H1	Yes	16
Food Grade Chain Lube	Mineral Oil	Non-drying, Ultra-thin, Oily	Clear	Yes	>370°F	H1	Yes	16
Food Grade Belt Dressing	Polyisobutene	Tacky, Non-Drying	Light Amber	Yes	<0°F	H1	Yes	16
Water-Based Silicone	Silicone	Non-drying	White	Yes	None	H1	Yes	16
Food Grade Dielectric Grease	Silicone	Paste	White	No	>572°F	H1	Yes	6
Food Grade Air Tool Oil	Polyalphaolefin	Non-drying	Clear	No	464°F	H1	No	1

## HEAVY DUTY

### EXTREME DUTY SILICONE

Premium-grade silicone fluid that exhibits superior lubrication and temperature viscosity characteristics. Use Extreme Duty Silicone on all metallic and non-metallic surfaces. Clear, non-staining, odorless and reduces friction and galling.

Part#	Item#	Case/Order#	Size	Units/cs
03030*	1003285	1003284	16 oz aerosol	12



### CHUTE LUBE® Silicone Lubricant

Chute Lube® Silicone Lubricant helps boxes glide down chutes and rails on package handling and sorting conveyors. Silicone spray for package handling applications minimizes corrosion and provides excellent lubricity. Its colorless, odorless, non-staining film lubricates and protects in most metal to non-metal applications. Eliminates the binding and sticking of packages and boxes, while protecting most surfaces even in wet conditions.

Part#	Item#	Case/Order#	Size	Units/cs
03204*	1003459	1003458	20 oz aerosol	12
03220	1003464	1003463	16 oz non-aerosol bottle	12
03222	1003466	1003466	5 gal pail	1
03223	1003467	1003467	55 gal drum	1



\* – 360° spray valve can be sprayed in the UP or DOWN position.

\*This product is labeled extremely flammable. Read and observe the special usage warning on the label. Do not apply while equipment is energized.

## CHAIN & WIRE ROPE LUBRICANT

Specifically formulated blend of synthetic lubricants and an organic molybdenum, anti-wear additive that penetrates deep, and leaves a tough film that lubricates and protects. Chain & Wire Rope Lube extends the working life of chains and wire rope and reduces wear caused by friction and corrosion.

Part#	Item#	Case/Order#	Size	Units/cs
03050 <sup>1*</sup>	1003306	1003305	16 oz aerosol	12



## EXTREME DUTY OPEN GEAR & CHAIN LUBE

A tough, tacky, solid film lubricant used for reducing friction and wear. It is a heavy-duty compound with exceptional "stay-put" characteristics. It provides maximum lubrication and shock protection, reduces gear noise, lubricates, prevents scoring and welding of gear teeth.

Part#	Item#	Case/Order#	Size	Units/cs
03058 <sup>1</sup>	1003318	1003317	16 oz aerosol	12



## HEAVY DUTY CLEAR PENETRATING GREASE

High-tack, clear lubricating gel provides superior lubrication and withstands high temperatures and pressures. Penetrates deep to form a tenacious, long-lasting film and resists acids, alkalis, salt, oxidation, weather and steam. This heavy-duty clear penetrating gel can extend the operating service life of equipment and reduce wear, galling and scarring.

Part#	Item#	Case/Order#	Size	Units/cs
03056 <sup>1*</sup>	1003316	1003315	20 oz aerosol	12



## DRY MOLY LUBE

Specially formulated dry film lubricant incorporates a concentrated dispersion of molybdenum disulfide (MoS<sub>2</sub>). Dry Moly Lube lowers friction, prevents galling and helps to reduce torque and energy consumption.


Part#	Item#	Case/Order#	Size	Units/cs
03084 <sup>*</sup>	1003351	1003350	16 oz aerosol	12



## OILFIELD DRY MOLY LUBE

Fast-drying film resists dirt and dust buildup. Good adhesion and long-lasting formula. Lowers friction, prevents galling and helps to reduce torque and energy consumption. High anti-friction and anti-seize properties.

Part#	Item#	Case/Order#	Size	Units/cs
03284 <sup>*</sup>	1003484	1003483	16 oz aerosol	12



## DRY GRAPHITE LUBE

A dry film lubricant that is ideal for applications where petroleum products must be avoided. Dry Graphite Lube bonds instantly to metal, rubber, plastic and most substrates to form a dirt-repelling barrier that lubricates and protects the surface from pressure and friction. Withstands temperatures up to 850°F and extreme pressures, as well as water and chemical attack.

Part#	Item#	Case/Order#	Size	Units/cs
03094 <sup>*</sup>	1003362	1003361	16 oz aerosol	12



## RED GREASE

Heavy-duty, long-lasting, NLGI Grade 2 aluminum complex based grease that provides superior lubrication and withstands high temperature and high pressure. Red Grease is resistant to acids, alkalis, salt, oxidation, weather and steam and has low water washout. It can extend the operating service life of equipment and reduce wear, galling and scoring.

Part#	Item#	Case/Order#	Size	Units/cs
03079 <sup>*</sup>	1003339	1003338	16 oz aerosol	12



## WHITE LITHIUM GREASE

High-purity, high-quality, NLGI Grade 2 white lithium-based aerosol grease provides superior lubrication and durability in any weather or temperature. Excellent as a break-in lubricant for bearings, and for general purpose lubrication and corrosion protection of machinery, tools and equipment.

Part#	Item#	Case/Order#	Size	Units/cs
03080 <sup>*</sup>	1003341	1003340	16 oz aerosol	12




<sup>1</sup> – Item restricted from sale in some states.

See product page on CRC website for specific restrictions.

<sup>\*</sup>This product is labeled extremely flammable.

Read and observe the special usage warning on the label.

Do not apply while equipment is energized.





## DIELECTRIC GREASE

Unique, non-curing silicone compound used for electrical sealing, lubricating, protecting and insulating. Dielectric Grease waterproofs electrical connections and components to protect against arcing due to moisture and other contaminants. NSF H1 Registered.

Part#	Item#	Case/Order#	Size	Units/cs
03082*	1003346	1003345	16 oz aerosol w/Perma-Lock®	12



## NICKEL ANTI-SEIZE & LUBRICATING COMPOUND

Nickel-based formulation that is free of copper, lead, sulfides and chlorides. Protects metal-to-metal applications from seizing and galling caused by high temperatures, heavy loads, vibration, chemicals and corrosion. Protects parts up to 2600°F.

Part#	Item#	Case/Order#	Size	Units/cs
SL35911	1007946	1007945	8 oz brush-top bottle	12
SL35913	1007948	1007947	16 oz brush-top bottle	12



## TAC 2® ADHESIVE CHAIN LUBRICANT

Low-viscosity formula provides the ability to penetrate and thoroughly coat vital chain pin and bushing areas. Contains molybdenum which provides cling ability to avoid sling-off or excess dripping. High temperature stability (up to 350°F continuous). Blue color allows instant identification of lubricated parts and equipment.

Part#	Item#	Case/Order#	Size	Units/cs
030761*	1003335	1003334	16 oz aerosol	12



## FOOD GRADE ANTI-SEIZE & LUBRICATING COMPOUND

A premium anti-seize compound developed specifically for use in applications where incidental food contact is possible. Composed entirely of ingredients that meet NSF H1 requirements. Protects metal parts from seizure, galling, rust, corrosion and heat freeze by tenaciously adhering to the metal surface. Protects parts up to 1800°F.

Part#	Item#	Case/Order#	Size	Units/cs
SL35905	1007942	1007941	8 oz brush-top bottle	12
SL35906	1007944	1007943	16 oz brush-top bottle	12



## INNER SLIDE LUBE

Lubricates and increases slide motion, extending forklift equipment life. Fortified with molybdenum disulfide and extreme pressure additives. Resists pound out under severe lubrication requirements. Adheres to metal surfaces and protects against rust and corrosion.

Part#	Item#	Case/Order#	Size	Units/cs
05305*	1003756	1003755	16 oz aerosol	12



## COPPER ANTI-SEIZE & LUBRICATING COMPOUND

General purpose anti-seize lubricant that prevents seizing and galling caused by high temperature, heavy loads, vibration and corrosion. This unique formula has a smooth texture, fine particle sizing and familiar copper color, making it an excellent choice for closely-fitted parts needing extreme lubrication.

Part#	Item#	Case/Order#	Size	Units/cs
SL35901	1007938	1007937	8 oz brush-top bottle	12
SL35903	1007940	1007939	16 oz brush-top bottle	12
14095*	1004830	1004829	16 oz aerosol	12



## WELDER'S ANTI-SPATTER

Prevents spatter from adhering to surrounding metal surfaces during welding. Eliminates the need to chisel, grind or wire brush after welding. Water-based formula allows easy clean-up without the use of solvent cleaners.

Part#	Item#	Case/Order#	Size	Units/cs
03083	1003349	1003348	16 oz aerosol	12



## THREAD LUBRICANT

A general purpose lubricant that prevents seizing caused by corrosion. Thread Lubricant aids assembly and disassembly, prevents rust and corrosion, and helps reduce costly downtime and breakage. This unique formula has a smooth texture and fine particle sizing, making it an excellent choice for closely fitted parts that need lubrication.

Part#	Item#	Case/Order#	Size	Units/cs
SL35925	1007955	1007954	8 oz brush-top bottle	6




























1 – Item restricted from sale in some states. See product page on CRC website for specific restrictions.

\*This product is labeled extremely flammable. Read and observe the special usage warning on the label. Do not apply while equipment is energized.



# LUBRICANTS

PRODUCT	Base Type	Film Type	Appearance	360 Valve	Flash Point (F)	NSF Category Code	SDS Label Attached	Container Size
Extreme Duty Silicone	Silicone	Dry	Clear Colorless Liquid	Yes	1.4°F	H2	Yes	
Chute Lube® Silicone Lubricant	Silicone	Wet	Clear Light Yellow Liquid	No N/A	<0°F (aerosol) 113°F (bulk)	H2	Yes No	   
Chain and Wire Rope Lubricant	Molybdenum Disulfide	Non-Drying	Clear Light Amber Liquid	No	<0°F	H2	Yes	
Extreme Duty Open Gear and Chain Lube	Petroleum Oil	Tacky	Black Semi-Viscous Liquid	No	17.6°F	N/A	Yes	
Heavy Duty Clear Penetrating Grease	Aluminum Complex	Clear Oily	Clear Liquid	No	<20°F	H2	Yes	
Dry Moly Lube	Molybdenum Disulfide	Dry	Dark Gray Viscous Liquid	No	-20°F	N/A	Yes	
Oilfield Dry Moly Lube	Molybdenum Disulfide	Dry	Gray Liquid	No	<0°F	N/A	Yes	
Dry Graphite Lube	Graphite	Dry	Black Liquid	No	-20.2°F	N/A	Yes	
Red Grease	Aluminum Complex	Grease	Red Viscous Grease	No	<23°F	N/A	Yes	
White Lithium Grease	Lithium-12	Grease	Off-White Viscous Grease	No	0°F	H2	Yes	
Dielectric Grease	Silicone	Non-Curing Silicone Paste	Translucent to Opaque Gel Paste	No	<20°F	H1	Yes	
TAC 2® Adhesive Chain Lubricant	Petroleum Oil	Soft Film	Blue Liquid	Yes	<0°F	H2	Yes	
Inner Slide Lube	Aluminum Complex	Non-Drying	Black Liquid	No	20°F	N/A	No	
Welder's Anti Spatter	Water Based	Non-Drying	Milky White Emulsion	No	>265°F	N/A	Yes	
Copper Anti-Seize	Copper	Wet	Copper Liquid Copper Semi-Solid Paste	No N/A	177°F (aerosol) 420°F (bulk)	N/A	Yes No	  
Food Grade Anti-Seize	Polyisobutylene	Wet	Opaque Off-White Semi-Solid Paste	N/A	445°F	H1	No	 
Nickel Anti-Seize	Nickel	Wet	Silver Paste	N/A	425°F	N/A	No	 
Thread Lubricant	Lithium Complex	Grease	Amber Semi-Solid to Solid Grease	N/A	>199°F	N/A	No	

## SP-350™ Corrosion Inhibitor

Provides protection for metal parts and assemblies that are stored indoors or in shipment. SP-350™ Corrosion Inhibitor promotes easy start-up of stored equipment.

Part#	Item#	Case/Order#	Size	Units/cs
03262	1003477	1003476	16 oz aerosol	12
03266	1003478	1003478	5 gal pail	1



## BRIGHT ZINC-IT® Instant Cold Galvanize

65% Zinc dust in the dried film. Acrylic-based, light-duty sacrificial zinc coating that inhibits corrosion and provides the beauty of a high-shine bright metallic finish. Recommended for touch-up and repair of bright finish, hot-dip galvanized surfaces.

Part#	Item#	Case/Order#	Size	Units/cs
18414*	1005244	1005243	16 oz aerosol	12



## SP-400™ Corrosion Inhibitor

Long-term indoor/outdoor corrosion inhibitor for machined surfaces and assemblies subjected to long periods of storage or adverse shipping conditions. Provides protection of all equipment subject to heat, humidity, chemicals or severely corrosive atmospheres.

Part#	Item#	Case/Order#	Size	Units/cs
03282*	1003481	1003480	16 oz aerosol	12
03286	1003485	1003485	5 gal pail	1



## 1ST ZINC® COLD GALVANIZING PRIMER

95% zinc dust in the dried film. Metal primer in traditional gray color. Meets or exceeds requirements of ASTM-A780, DOD-P-21035B, MIL-P-46105, MIL-P-26915B, SSPC PS-12, PS-20, PS-22, PS-29 and PS-30. Can be top coated.

Part#	Item#	Case/Order#	Size	Units/cs
FZ-100	1008303	1008224	16 oz aerosol	12



## BATTERY TERMINAL PROTECTOR

Apply to battery terminals to provide a soft, dry, lead-free protective coating that keeps moisture, salts and road grime from corroding metal contacts. Enhances battery life and power by preventing corrosion-related leakage.

Part#	Item#	Case/Order#	Size	Units/cs
03175*	1003433	1003432	12 oz aerosol	12



## BRITE ZINC®

69% Zinc dust in the dried film. Long-term repair and protection of metal from corrosion. One step color matches the shiny look of hot dip galvanizing. Meets ASTM-A780 for corrosion protection. Aerosol has special no clog nozzle.

Part#	Item#	Case/Order#	Size	Units/cs
B-100*	1008302	1008223	16 oz aerosol	12
B-200	1008226	1008226	1 gal pail	1



## ZINC-IT® Instant Cold Galvanize

High-performance coating of 93% Zinc dust in the dried film that electrochemically bonds with ferrous metals to form a galvanic cell. Zinc-It® Instant Cold Galvanize is an excellent touch-up for damaged galvanized coatings.

Part#	Item#	Case/Order#	Size	Units/cs
18412*	1005240	1005239	16 oz aerosol	12
18413	1005241	1005241	1 gal can	1



## RUST CONVERTER

CRC Rust Converter neutralizes rust and converts it to a tough, black primer in one easy step. Fast-drying coating can be painted over. Prevents future rusting by sealing out moisture and other outside elements with oil-based paint. Applications include vehicles, trailers, railings, bridges, equipment, storage tanks, transmission towers, etc.

Part#	Item#	Case/Order#	Size	Units/cs
18419	1005248	1005247	1 gal bottle	4



⬇ – 360° spray valve can be sprayed in the UP or DOWN position.

\*This product is labeled extremely flammable. Read and observe the special usage warning on the label. Do not apply while equipment is energized.

# CORROSION INHIBITORS



PRODUCT	Appearance	Corrosion Protection	Drying Time (to touch)	Specifications	SDS Label Attached	Container Size
SP-350™	Thin, Non-Drying	Indoors – Up to 2 Years	Non-Drying	NSF H2 Registered	Yes	16 5
SP-400™	Waxy	Indoors & Outdoors – Up to 2 Years	1 Hour	NSF H2 Registered, Meets requirements of MIL-C-16173 Grade 4 (corrosion test only)	Yes	16 5
Battery Terminal Protector	Viscous	Apply every 3-4 months	Non-Drying	N/A	Yes	12
Zinc-It®	Dry, Zinc	ASTM B117 Salt Spray: 2300 hours average	15 to 30 Minutes	Meets Requirements ASTM 780A, Mil-P-26915, Mil-P-46105, MIL-P 21035B (Aerosol) Meets Requirements of MIL-P 26915, MIL-P 46105 (Bulk)	Yes	16 1
Bright Zinc-It®	Dry, Zinc, Shiny Finish	ASTM B117 Salt Spray: 2300 hours average	15 to 30 Minutes	ASTM-A780	Yes	16
Rust Converter	Milky Emulsion	Paint/coating for steel	1 Hour	N/A	No	1
Brite Zinc®	Dry	ASTM B117 Salt Spray: 2000 hours average	15 minutes	Aerosol: Meets ASTM-A-780 Requirements Bulk: ASTM-A-780 DOD-P-2103B, MIL-P-46105, MIL-P-26915B, SSPC PS-12, SSPC PS-20, SSPC PS-22, SSPC PS-29 SSPC PS-30	No	16 1
1st Zinc® Cold Galvanizing Primer	Dry	ASTM B117 Salt Spray: 2000 hours average	15 to 30 minutes	ASTM-A-780, DOD-P-21035A, MIL-P26915, MIL-P-46105 SSPC PS-12, SSPC PS-20, SSPC PS-22, SSPC PS-29, SSPC PS-30	Yes	16

## NOZZLE CLEANERS AND PROTECTANTS

### NOZZLE-KLEEN #2®

High-quality aerosol anti-spatter for most applications. Paintable, non-flammable and contains no fluorocarbons.

Part#	Item#	Case/Order#	Size	Units/cs
007022 <sup>1</sup>	1008283	1008203	16 oz aerosol	6



### NOZZLE-KLEEN HD®

Used for high-temperature applications, including pulsed welding and argon-rich mixtures. Outstanding fixture protection. Excellent for stainless steel. Paintable, non-flammable and contains no fluorocarbons.

Part#	Item#	Case/Order#	Size	Units/cs
007020 <sup>1</sup>	1008282	1008202	16 oz aerosol	6



### NOZZLE-KLEEN® 107A

A convenient quick-drying aerosol that contains no methylene chloride. 107A allows for pre-heat, higher duty cycles, and higher temperature applications. Excellent for fixture and tooling protection. Paintable and contains no fluorocarbons.


Part#	Item#	Case/Order#	Size	Units/cs
YOR-107-A	1008304	1008225	20 oz aerosol	12



### NOZZLE-DIP HD®

A leading water-based gel reduces spatter build-up on nozzles and tips. Excellent cooling properties for longer tip and nozzle life. Can dip hot or cold; gel will not migrate into liner. Non-flashing and paintable.

Part#	Item#	Case/Order#	Size	Units/cs
007094	1008236	1008137	32 oz jar	6



## ANTI-SPATTER

### WELD-KLEEN HD®

Heavy-duty base metal treatment that is solvent based and quick drying. Accepts pre-heating and is non-flammable.

Part#	Item#	Case/Order#	Size	Units/cs
007030 <sup>1</sup>	1008284	1008204	20 oz aerosol	6



### WELD-KLEEN 350®

An industry-leading water-based anti-spatter designed for use on most base metal applications. Ideal for protecting parts, clamps, tooling and fixtures. Non-hazardous, non-flammable and paintable.

Part#	Item#	Case/Order#	Size	Units/cs
007090	1008275	1008193	1 gal bottle	2
007091	1008183	1008183	5 gal pail	1
007092	1008184	1008184	55 gal drum	1



### WELD-KLEEN 350® AP

All Position (AP) is the same environmentally-friendly, water-based anti-spatter as found in Weld-Kleen 350®, but in a unique, pressurized bag-on-valve aerosol can. Each press of the nozzle releases the same Weld-Kleen 350® as our pump quart. Contains no harmful solvents.

Part#	Item#	Case/Order#	Size	Units/cs
007088	1008257	1008159	16 oz aerosol	6



## WIRE CLEANERS AND LUBRICANTS

### LUBE-MATIC® LUBE PADS

For all types of steel wire including solid and fabricated. Each black pad is pre-treated with Lube-Matic® Wire Kleener and Lubricant, allowing for smooth feeding of wire with poor cast, poor helix, rust or long-feed liners. 6 pads per pack. Not recommended for aluminum.

Part#	Item#	Case/Order#	Size	Units/cs
007060	1008258	1008160	1 pack	6



<sup>1</sup> – Item restricted from sale in some states. See product page on CRC website for specific restrictions.

## LUBE-MATIC® PADS

Red pads clean rust and dirt off wire surfaces, reducing burnbacks by up to 50%. Excellent for all types of welding wire including aluminum. 6 pads per pack.



Part#	Item#	Case/Order#	Size	Units/cs
007061	1008260	1008162	1 pack	6

## LUBE-MATIC® WIRE KLEENER AND LUBRICANT

Helps feed all mild steel, fabricated, and core wires. Cuts rust and reduces wire drag by 60%. Use to re-lube black pads. Great for longer distance feeds.



Part#	Item#	Case/Order#	Size	Units/cs
007040 <sup>1</sup>	1008301	1008222	5 oz can	6

# METALWORKING

## TRUETAP® HD

### Cutting Fluid

Designed as a heavy-duty cutting fluid for use in severe applications. It is a thick fluid that clings to the cutting tool throughout the operation. Contains no 1,1,1-Trichloroethane.



Part#	Item#	Case/Order#	Size	Units/cs
03400 <sup>2</sup>	1003504	1003503	16 oz bottle	12

## SOLUBLE OIL

Improves wetting, cleaning and lubricating during metal cutting and grinding operations. It prevents rust, corrosion and rancidity.



Part#	Item#	Case/Order#	Size	Units/cs
SL2513	1007830	1007829	1 gal bottle	4

## CUTTING OIL

Superior thread cutting lubricant for use on all types of ferrous and non-ferrous metals, including brass, copper and aluminum.



Part#	Item#	Case/Order#	Size	Units/cs
14050 <sup>2</sup>	1004784	1004783	16 oz aerosol	12
14051 <sup>2</sup>	1004786	1004785	1 gal bottle	4



PRODUCT	Type	Color	Metal Compatibility	Container Size
TrueTap® HD Cutting Fluid	Paraffins w/EP Additives	Light Amber	All Metals	16
Cutting Oil	Petroleum Oils	Dark Amber	All Metals	16 1
Soluble Oil	Mineral Oil	Amber	All Metals	1

1 – Item restricted from sale in some states. See product page on CRC website for specific restrictions.  
2 – Item restricted from sale in SCAQMD



**CONTACT CLEANER 2000®****Precision Cleaner**

Provides fast-cleaning action for the removal of dirt, light oils and other contaminants. It evaporates quickly, leaves no residue, has no flash point. Not recommended for use on Noryl® or polycarbonate type plastics.

Part#	Item#	Case/Order#	Size	Units/cs
02140 <sup>1</sup>	1003224	1003223	16 oz aerosol	12

**PF PRECISION CLEANER**

Innovative contact cleaner that offers strong cleaning action, fast evaporation and no residue in electronic cleaning applications. PF Precision Cleaner has no flash point and is safe to use on plastics.

Part#	Item#	Case/Order#	Size	Units/cs
02190 <sup>1</sup>	1003241	1003240	16 oz aerosol	12

**CONTACT CLEANER 2000® VC****Precision Cleaner**

Aggressive precision cleaner designed to remove contaminants from electronic equipment. It provides an effective alternative to HCFC 141b-based cleaners when sensitive plastics are not a concern. It is VOC compliant in all 50 states<sup>∞</sup>.

Part#	Item#	Case/Order#	Size	Units/cs
02240 <sup>1</sup>	1003249	1003248	16 oz aerosol	12

**CO® CONTACT CLEANER**

Provides an optimal alternative to CFC, HCFC and flammable contact cleaners. Is VOC exempt. Regular use of CO® Contact Cleaner will help prevent electrical failures, increase performance and prolong equipment life by dissolving and rinsing away contaminants.

Part#	Item#	Case/Order#	Size	Units/cs
02016 <sup>1</sup>	1003172	1003171	16 oz aerosol	12
02017 <sup>1</sup>	1003174	1003173	16 oz non-aerosol can w/trigger	12

**ELECTRONIC COMPONENT CLEANER****Precision Cleaner**

Aggressive precision cleaner for use on electronic components in industrial, electrical and aviation applications. Its high-purity, fast-penetrating formula aggressively dissolves and rinses away dust, lint, dirt, oils, polar soils and other contaminants from most non-plastic surfaces. It evaporates rapidly, leaves no residue and has no flash point.

Part#	Item#	Case/Order#	Size	Units/cs
02200 <sup>1</sup>	1003243	1003242	16 oz aerosol	12

**QD® CONTACT CLEANER**

A petroleum distillate and alcohol-blended precision cleaner suitable for sensitive electronics. Evaporates quickly, leaves no residue and is safe to use on all plastics. Ideal for applications where lower flash point solvents can be used.

Part#	Item#	Case/Order#	Size	Units/cs
02130 <sup>1</sup>	1003218	1003216	16 oz aerosol	12
02133 <sup>1*</sup>	1008124	1003221	16 oz non-aerosol can w/trigger	12



## HOW TO RESTORE WATER-DAMAGED EQUIPMENT

VIEW OUR WATER RESTORATION HOW-TO VIDEO ONLINE.

1. Clean the Equipment
2. Apply a CRC Moisture Displacing Lubricant
3. Measure Resistance
4. Apply a CRC Precision Cleaner
5. Do Not Energize until Minimum Resistance Levels are Obtained

<sup>1</sup> – 360° spray valve can be sprayed in the UP or DOWN position.

<sup>∞</sup> – As defined by Consumer Products VOC regulations.

<sup>1</sup> – Item restricted from sale in some states. See product page on CRC website for specific restrictions.

\*This product is labeled extremely flammable. Read and observe the special usage warning on the label. Do not apply while equipment is energized.

Noryl® is a registered trademarks of SABIC GLOBAL TECHNOLOGIES B.V.

WELDING

METALWORKING

ELECTRICAL MAINTENANCE

# ELECTRICAL PRECISION CLEANERS

## CE™ PRECISION CLEANER

Designed specifically for dissolving and flushing away carbon dust, polar soils, mineral oils and non-polar soils found in elevator rooms and vertical lifts. It has a controlled evaporation rate, providing sufficient dwell time to dissolve and flush dirt from surfaces before evaporating and without leaving a residue. Low odor.

Part#	Item#	Case/Order#	Size	Units/cs
14035	1004776	1004775	16 oz aerosol	12



## DUSTER™

### Aerosol Dust Removal System

Safely removes dirt and dust from energized equipment without damaging sensitive components or surface finish. Penetrates into cracks and crevices to remove contaminants that normal hand dusting cannot reach. It delivers a powerful blast that removes embedded debris. The extension tube can be used for more precise delivery. Energized equipment use only. Non-flammable and plastic safe.

Part#	Item#	Case/Order#	Size	Units/cs
14085	1004818	1004817	12 oz aerosol trigger	12



PRODUCT	Base Type	Flash Point (F)	Evaporation Rate	Dielectric Strength	Plastic Safe	SDS Label Attached	NSF Category Code	VOC % <sup>∞</sup>	Container Size
Contact Cleaner 2000® Precision Cleaner	HFE	None	Fast	26,100 Volts	May be harmful to some plastics	Yes	K2	66.5	16
Contact Cleaner 2000® VC	HFE	None	Fast	30,800 Volts	May be harmful to some plastics	Yes	K2	35.8	16
CO® Contact Cleaner	HFE	None	Very Fast	27,600 Volts (Aerosol) 28,750 Volts (Bulk)	Yes	Yes	K2	0	16 16
PF Precision Cleaner	HFE	None	Very Fast	26,360 Volts	Yes	Yes	K2	6.0	16
QD® Contact Cleaner	Hydrocarbon Solvents	16°F (aerosol) <0°F (bulk)	Very Fast	39,500 Volts (aerosol) 30,500 Volts (bulk)	Yes	Yes	K2	74.9	16 16
Electronic Component Cleaner	HFE	None	Fast	26,100 Volts	May be harmful to some plastics	Yes	K2	66.5	16
CE™ Precision Cleaner	HFE	None	Slow	28,400 Volts	Safe on Most Plastics (test small area)	Yes	K2	16.3	16
Duster™ Aerosol Dust Removal System	HFC	None	Very Fast	ND	Yes	No	K2	0	12

ND = Not Determined

∞ – VOC % as defined by Consumer Products VOC regulations

📌 – 360° spray valve can be sprayed in the UP or DOWN position.

**LECTRA CLEAN®****Heavy Duty Electrical Parts Degreaser for Energized Equipment**

Quickly and effectively removes grease, oil, tar, dirt, grime, corrosion, sludge and other stubborn substances from energized electrical equipment to increase operating efficiency. Offers quick and efficient degreasing action, fast evaporation and no residue. With no flash point, it is an excellent alternative to 1,1,1-based cleaning products. Use with caution near plastics. Designed specifically to be safe for use on energized electrical equipment.

Part#	Item#	Case/Order#	Size	Units/cs
02018	1003177	1003175	20 oz aerosol	12

**LECTRA FORCE™****Electrical Cleaner**

Revolutionary technology combines the power of a high-performance, industrial-strength degreaser with lower VOCs. It quickly dissolves grease, oil and sludge for more efficient operation of electrical equipment. Lectra Force™ Electrical Cleaner evaporates rapidly, leaves no residue and has a good health and safety profile.

Part#	Item#	Case/Order#	Size	Units/cs
02115 <sup>1</sup>	1003207	1003206	20 oz aerosol	12

**LECTRA CLEAN® II**

An excellent alternative for cleaning electric motors and equipment where chlorinated solvents are not acceptable. Lectra Clean® II effectively removes soils and cleans surfaces without residue build-up. Use with caution near plastics. Non-conductive, non-corrosive, low odor.

Part#	Item#	Case/Order#	Size	Units/cs
02120	1003209	1003208	20 oz aerosol	12

**CITRUS DEGREASER**

A unique, heavy-duty degreaser that is extremely effective for dissolving and removing grease, oil, lubricants and contaminants without requiring water wash-off and without leaving a residue. Use with caution on plastics and paints.

Part#	Item#	Case/Order#	Size	Units/cs
14170 <sup>1</sup>	1004861	1004860	20 oz aerosol	12
14970 <sup>*3</sup>	1005158	1005157	20 oz aerosol (MUO)	12
14171 <sup>3</sup>	1004863	1004862	16 oz non-aerosol can w/trigger	12
14172 <sup>3</sup>	1004865	1004864	1 gal bottle	4
14174 <sup>3</sup>	1004867	1004867	55 gal drum	1

**ELECTRICAL PARTS CLEANER for Energized Equipment**

Effective heavy-duty degreaser provides strong degreasing action, fast evaporation and no residue when cleaning energized electrical parts and equipment. It is non-flammable and VOC-exempt. Use with caution near plastics and paints. Designed specifically to be safe for use on energized electrical equipment.

Part#	Item#	Case/Order#	Size	Units/cs
02180	1003236	1003235	20 oz aerosol	12

**NATURAL DEGREASER™****Citrus-Based Degreaser**

Naturally-formulated degreaser that offers the natural cleaning power of citrus. It does not require water wash-off, and does not leave a sticky residue commonly associated with citrus-based cleaners. Use with caution on plastics and paints.

Part#	Item#	Case/Order#	Size	Units/cs
14005	1004762	1004761	20 oz aerosol	12



<sup>1</sup> — 360° spray valve can be sprayed in the UP or DOWN position.












1 — Item restricted from sale in some states. See product page on CRC website for specific restrictions.

3 — Not for retail sale, for use in manufacturing establishments only.

\*This product is labeled extremely flammable. Read and observe the special usage warning on the label. Do not apply while equipment is energized.

# ELECTRICAL MAINTENANCE

## ELECTRICAL HEAVY DUTY DEGREASERS

PRODUCT	Base Type	Cleaning Strength (KB)	Flash Point (F)	Evaporation Rate	Dielectric Strength (Volts)	VOC % <sup>∞</sup>	NSF Category Code	SDS Label Attached	Container Size
Lectra Clean®	Chlorinated	90	None	Very Fast	18,340 Volts	0	K2	Yes	
Lectra Clean® II	Petroleum Distillate	75	185°F	Slow	42,100 Volts	0	K1, K2	Yes	 
Electrical Parts Cleaner	Chlorinated	95	None	Very Fast	37,500 Volts	0	K2	Yes	
Lectra Force™ Electrical Cleaner	DCE/HFE	97	None	Fast	39,000 Volts	42.4	K2	Yes	
Citrus Degreaser	d-Limonene & Petroleum Distillate	32	170°F	Slow	58,600 Volts	9.8	C1	Yes	
Citrus Degreaser Bulk & MUO	d-Limonene & Petroleum Distillate	54	100°F	Fast	35,000 Volts	100 (bulk) 96.5 (MUO)	C1	No (bulk) Yes	   
Natural Degreaser™	Glycol Ether	>200	150°F	Slow	28,600 Volts	9.7	C1	Yes	

## ELECTRICAL CABLE CLEANERS

PRODUCT	Base Type	Cleaning Strength (KB)	Flash Point (F)	Evaporation Rate	Dielectric Strength (Volts)	NSF Category Code	SDS Label Attached	Container Size
Cable Clean® Degreaser	DCE/HFE	125	None	Fast	26,800	K2	Yes	
Cable Clean®	DCE/HFE	91	None	Fast	29,010	None	Yes	
Cable Clean® RD™	Chlorinated	96	None	Fast	41,100	K2	Yes	
Cable Clean® HF™	Petroleum Distillate	25	204°F	Slow	45,700	None	Yes	

## ELECTRICAL LUBRICANTS

PRODUCT	Base Type	Film Type	Color	Flash Point (F)	Dielectric Strength (Volts)	NSF Category Code	SDS Label Attached	Container Size
2-26®	Petroleum Distillate	Non-Drying	Amber	200°F	51,300 Volts	H2	Yes	  
Electrical Silicone Lubricant	Silicone	Dry	Clear	<0°F	350 Volts/Mil	H1	Yes	 
Dielectric Grease	Silicone	Non-Curing	White	>572°F	>450 Volts/Mil	H1	No	

KB = Kauri Butanol    ∞ – VOC % as defined by Consumer Products VOC regulations



**CABLE CLEAN® DEGREASER****High Voltage Splice Cleaner**

Advanced technology that combines the power of a high-performance, high-voltage splice and termination cleaner with an industrial-strength degreaser. Helps prevent current leakage, excessive resistance, reduced performance and arcing at splice and termination junctions by quickly removing grease, oil, wax, dirt, silicone lubricants and other contaminants.

Part#	Item#	Case/Order#	Size	Units/cs
02064	1003191	1003190	20 oz aerosol	12

**CABLE CLEAN® RD™ (Rapid Dry)****High Voltage Splice Cleaner**

Chlorinated solvent-based cleaner for the removal of contaminants from the semi-conductive core of high-voltage cables. Offers effective cleaning action with the benefits of non-flammability, no residue and fast evaporation. It can be used to replace 1,1,1-Trichloroethane without sacrificing performance. It contains no known ozone-depleting chemicals.

Part#	Item#	Case/Order#	Size	Units/cs
02150 <sup>1</sup>	1003230	1003229	16 oz aerosol	12

**CABLE CLEAN®****High Voltage Splice Cleaner**

Aggressively removes contaminants from the semi-conductive core of high-voltage cables during splicing and termination. Helps prevent current leakage, excessive resistance, reduced performance and arcing at splice and termination junctions.

Part#	Item#	Case/Order#	Size	Units/cs
02069	1003195	1003194	20 oz aerosol	12

**CABLE CLEAN® HF™ (High Flash)****High Voltage Cable Cleaner**

High flash point, petroleum distillate-based cleaner for the removal of contaminants from the semi-conductive core of high-voltage cables. Provides an alternative to chlorinated, ozone-depleting or terpene-based cable cleaning products.

Part#	Item#	Case/Order#	Size	Units/cs
02170	1003234	1003233	16 oz aerosol	12



## ELECTRICAL LUBRICANTS

**2-26®****Multi-Purpose Precision Lubricant**

Prevent electrical malfunctions caused by water penetration, humidity, condensation or corrosion. Drives out moisture and leaves a thin, long-lasting film. Use around modern plastics and insulators.

Part#	Item#	Case/Order#	Size	Units/cs
02004	1003161	1003160	6 oz aerosol	12
02005	1003163	1003162	16 oz aerosol	12
02007	1003167	1003166	16 oz non-aerosol bottle	12

**DIELECTRIC GREASE**

Unique, non-curing silicone compound used for electrical sealing, lubricating, protecting and insulating. Dielectric Grease waterproofs electrical connections and components to protect against arcing due to moisture and other contaminants.

Part#	Item#	Case/Order#	Size	Units/cs
02085	1003199	1003198	6 oz pressurized can w/ Select-A-BEAD® Nozzle	12

**ELECTRICAL SILICONE LUBRICANT**

Lubricates, waterproofs and protects with a thin, clear, non-staining dry film. Eliminates binding and sticking; protects most surfaces. Low surface tension permits better coverage and deeper penetration.

Part#	Item#	Case/Order#	Size	Units/cs
02094*	1003201	1003200	16 oz aerosol	12
02097*	1003203	1003203	55 gal drum	1



⚡ – 360° spray valve can be sprayed in the UP or DOWN position.

<sup>1</sup> – Item restricted from sale in some states. See product page on CRC website for specific restrictions.

\*This product is labeled extremely flammable. Read and observe the special usage warning on the label. Do not apply while equipment is energized.

# SPECIALTY PRODUCTS

## RTV SILICONE ADHESIVE/SEALANTS

CRC Room Temperature Vulcanizing (RTV) Adhesive/Sealants are designed for a wide range of sealing, bonding, protecting and waterproofing. They cure at room temperature – no special curing methods required. The chemically stable formulations show little change in physical properties after exposure to rain, snow, temperature extremes and weathering.

Clear: Forms a barely visible water-tight seal

White: Designed for high moisture, indoor/outdoor applications

Blue: Heavy-duty industrial gasket sealant

Red: High-temperature, low-odor, non-corrosive gasket sealant

Black: High-pressure, low-odor, non-corrosive gasket sealant

## RTV SILICONE PRESSURIZED TUBES

Revolutionary packaging with Select-a-BEAD®

Nozzle – allows user to control bead width. Dispenses a uniform bead for consistent results. Pressurized package keeps silicone fresh so it won't dry out. Self-sealing plug – Simply pull out to re-use the product. VOC compliant.∞

Part#	Item#	Case/Order#	Size	Units/cs
14055+	1004788	1004787	Clear 8 oz tube	12
14056+	1004790	1004789	White 8 oz tube	12
14057	1004792	1004791	Blue 8 oz tube	12
14059	1004794	1004793	Red 8 oz tube	12
14072	1004800	1004799	Black 8 oz tube	12



## RTV SILICONE CARTRIDGES

Economical for large jobs. Convenient screw-on nozzle. Fast dispensing for applications that require less precision. VOC compliant.∞

Part#	Item#	Case/Order#	Size	Units/cs
14073+	1004802	1004801	Clear 12 oz cartridge	12



## FOOD ZONE SILICONE SEALANTS

NSF-Certified under Standard 51 for sealing, bonding, protecting and waterproofing food equipment. RTV Silicone properties remain intact after exposure to moisture and temperature extremes.

Part#	Item#	Case/Order#	Size	Units/cs
14083+	1004814	1004813	Clear 12 oz cartridge	12



## SPRAY ADHESIVE

General-purpose, quick-tack adhesive specially formulated to bond to many foils, plastics, papers, foams, metals, cardboards and cloths. Compare to 3M® Super 77™ Adhesive. Utilizes a unique web-spray applicator.

Part#	Item#	Case/Order#	Size	Units/cs
03018	1003268	1003267	24 oz aerosol	12



## FOAM

### Minimal Expansion

Polyurethane foam designed to fill, seal, bond, retrofit, insulate and deaden sound in and around cracks and cavities. It forms a permanent, waterproof and airtight bond to masonry, wood, glass, metal and most plastics. Stops drafts, dust, moisture, insects and rodents. When cured, foam can be sanded, painted or stained. The low-expansion formula expands 50% when fully cured. Cured foam insulates to R-5 for each inch of foam. UL® classified as a caulking sealant. Foam is non-flammable. Reusable for up to 30 days after initial use.

Part#	Item#	Case/Order#	Size	Units/cs
14077	1004808	1004807	16 oz aerosol	12



⚙ – 360° spray valve can be sprayed in the UP or DOWN position.

UL® is a registered trademark of UL LLC.

3M® and Super 77™ are trademarks of 3M Company

+ – Meets NSF/ANSI Standard 51

∞ – As defined by Consumer Products VOC regulations.

**MINUTE MEND™****Multi-Purpose Epoxy Putty**

A two-part epoxy putty packaged in a convenient one-piece stick. Permanently repairs scratches, gouges and holes in drums, tanks, pipes, castings, molds, sinks, tubs and leaky gaskets. Can be used to perform routine electrical jobs such as mounting terminal blocks, packing wires and repairing breaker boxes. Ideal for stopping leaks and can even be used under water. Can be used in plumbing, electrical, ceramic, vehicle and machinery repair. Ready to use in less than one minute after mixing.

Part#	Item#	Case/Order#	Size	Units/cs
14070	1004796	1004795	4 oz stick	24

**AEROSOL LEAK DETECTOR**


Formulated for the quick and easy site detection of gas leaks and air leaks. Reliably locates gas leaks and pressure losses in pipes and pressurized systems by forming highly visible bubbles when applied over any leak. The water-based formula contains no oils, silicones or harmful solvents. Highlights all leaks, even under low pressure. Non-flammable aerosol package enables fast and easy application with no waste or spillage. No odor. NSF P1 Registered.

Part#	Item#	Case/Order#	Size	Units/cs
14503	1004997	1004996	20 oz aerosol	12

**TESTING****SMOKE TEST®****Smoke Detector Tester**










Convenient, easy and safe product to test the functional ability of a smoke detector. Checks for obstructions or debris, which clog detector vents and prevent smoke from properly entering the sensing chamber. Simulates smoke to provide a true, functional test for smoke detectors. Aerosol spray extends user reach up to 6 feet, allowing the user to perform the test while standing safely on the floor. No harmful residue, plastic safe, non-staining.

Part#	Item#	Case/Order#	Size	Units/cs
02105*	1003205	1003204	6 oz aerosol	12



\*This product is labeled extremely flammable. Read and observe the special usage warning on the label. Do not apply while equipment is energized.

# SPECIALTY PRODUCTS

PRODUCT	Room Temp. Curing	Corrosive to Metals	Temperature Range	Elongation %	Dielectric Strength	Tensile Strength (Lab Shear)	Conforms to Specifications	Container Size
Food Zone Silicone Sealant Clear	Yes	Yes	-50°F- 400°F	500%	25 KV/mm	264 psi	Mil-A-46106 Type 1, NSF/ANSI Standard 51, FDA Reg. 21 CFR-177.2600	 12
RTV Silicone Adhesive/Sealant Clear	Yes	Yes	-50°F to 400°F	500%	25 KV/mm	264 psi	Mil-A-46106 Type 1, NSF/ANSI Standard 51, TT-S-00230-C, ASTM-C-920, FDA Reg. 21 CFR-177.2600	 8 12
RTV Silicone Adhesive/Sealant White	Yes	Yes	-50°F to 400°F	500%	25 KV/mm	264 psi	Mil-A-46106 Type 1, NSF/ANSI Standard 51, TT-S-00230-C, ASTM-C-920, FDA Reg. 21 CFR-177.2600	 8
RTV Silicone Adhesive/Sealant Blue	Yes	Yes	-50°F to 400°F	500%	25 KV/mm	264 psi	Mil-A-46106 Type 1, TT-S-00230-C, ASTM-C-920, FDA Reg. 21 CFR-177.2600	 8
RTV Silicone Adhesive/Sealant Red	Yes	No	-50°F to 500°F	560%	18 KV/mm	260 psi	Mil-A-46106 Type 1, TT-S-00230-C, ASTM-C-920	 8
RTV Silicone Adhesive/Sealant Black	Yes	No	-50°F to 400°F	560%	18 KV/mm	260 psi	Mil-A-46106 Type 1, TT-S-00230-C, ASTM-C-920	 8
Spray Adhesive	Yes	No	-20°F to 123°F	N/A	N/A	N/A	N/A	 24
Foam Minimal Expansion	Yes	No	-200°F to 200°F (cured foam)	N/A	N/A	N/A	Insulate to R-5, UL Calssified R14175	 16
Minute Mend™	Yes	No	-40°F to 250°F 350°F Intern.	N/A	300 Volts/Mil	500 lbs. to 900 lbs.	N/A	 4



## AIR TOOL OIL

SAE 10

Lubricates and protects pneumatic equipment. Increases torque; assures long tool life. Reduces rust, varnish and sludge build-up.

Part#	Item#	Case/Order#	Size	Units/cs
SL2531	1007835	1007834	15 oz bottle	12
SL2533	1007837	1007836	1 gal bottle	4



## GL-4 MULTI-PURPOSE GEAR OIL

SAE 85W90

Provides lubrication over a wide temperature range, including high temperatures. Protects against corrosion in industrial drives, worm and hypoid gear sets. Reduces wear; extends life of gear teeth.

Part#	Item#	Case/Order#	Size	Units/cs
SL24239	1007805	1007804	1 gal bottle	4



## HYDRAULIC & JACK OIL

SAE 20

Protects all parts in hydraulic jacks over a wide temperature range. Prevents foaming, rust, oxidation, corrosion and seal swell.

Part#	Item#	Case/Order#	Size	Units/cs
SL2621	1007846	1007845	15 oz bottle	12



## GL-4 MULTI-PURPOSE GEAR OIL

SAE 140

Contains anti-rust, anti-oxidation, anti-wear and extreme pressure additives. Provides the corrosive protection and film strength needed in industrial drives, worm and hypoid gear sets. Wide temperature range. Extends life of gear teeth.

Part#	Item#	Case/Order#	Size	Units/cs
SL24238	1007803	1007802	1 gal bottle	4



## COMPRESSOR OIL

SAE 30

Helps promote longer life in all types of reciprocating and rotary compressors. Solvent refined and clay filtered for long-lasting, anti-foul operation. Cleans valve seat deposits as they form. Prevents ring sticking and reduced wear.

Part#	Item#	Case/Order#	Size	Units/cs
SL22131	1007784	1007783	1 qt bottle	12
SL22133	1007786	1007785	1 gal bottle	4



## GL-5 PLUS NEW GENERATION™

Heavy Duty Limited Slip Gear Oil  
SAE 85W140

Meets many military and commercial specifications and service requirements. Excellent for use where seasonal temperatures fluctuate widely. Minimum viscosity change during service. Superior performance in extreme pressure and high-load conditions.

Part#	Item#	Case/Order#	Size	Units/cs
SL2433	1007810	1007809	1 gal bottle	4



## FOOD GRADE AIR TOOL OIL

ISO 32

NSF H1 Registered for incidental food contact. A fully synthetic food grade oil that is formulated with the highest quality polyalphaolefin (PAO) base oil to meet the lubrication requirements of air line equipment. Provides lubrication for all air line equipment used in food processing plants.

Part#	Item#	Case/Order#	Size	Units/cs
SL2300	1007792	1007791	1 qt bottle	6



## TOOL & EQUIPMENT OILS

### GL-5 PLUS NEW GENERATION™

Heavy Duty Limited Slip Gear Oil  
SAE 75W90

Protects against corrosion, seal damage, oxidation and wear. Provides better protection and extended drain intervals in new cars, 4WDs, high-performance vehicles, and domestic and import cars and trucks with limited-slip, sure-grip and posi-traction type differential systems. Excellent performance over a wide range of temperatures. Provides protection for operations under both high-speed/low-torque and low-speed/high-torque conditions.



Part#	Item#	Case/Order#	Size	Units/cs
SL2463	1007814	1007813	1 gal bottle	4

### GL-5 PLUS NEW GENERATION™

Limited Slip Gear Oil SAE 80W90

Thermally stable, high-quality, multi-purpose automotive and truck lubricant with extreme pressure properties. Especially suited for use in high-performance differentials. Assures absolute lubrication and protection against shock loading and gear scoring. Prevents chatter, noise and vibration in limited-slip axles. Contains rust and corrosion inhibitors. Provides protection for operations under both high-speed/low-torque and low-speed/high-torque conditions.



Part#	Item#	Case/Order#	Size	Units/cs
SL2473	1007818	1007817	1 gal bottle	4

PRODUCT	VIS @ 40°C c.s.T.	VIS @ 100°C c.s.T.	Base	AGMA	Specifications
GL-4 Multi-Purpose Gear Oil 85W90	200	17	Mineral Oil	5 EP	N/A
GL-4 Multi-Purpose Gear Oil 140	400	28	Mineral Oil	8 EP	N/A
GL-5 Plus New Generation™ Heavy Duty Limited Slip Gear Oil 85W140	344.8	26.4	Mineral Oil	7 EP	MIL-PRF-2105D SAE-J-2360
GL-5 Plus New Generation™ Heavy Duty Limited Slip Gear Oil 75W90	110	17.4	Mineral Oil	6 EP	MIL-PRF-2105D SAE-J-2360
GL-5 Plus New Generation™ Limited Slip Gear Oil 80W90	136.4	14.6	Mineral Oil	4 EP	MIL-PRF-2105D SAE-J-2360

## GREASES

### LITHIUM-BASED

#### SUPER WHITE™

Multi-Purpose Grease

Meets late-model high-tech specifications. NLGI-2 lithium base. Wide temperature range of 0°F to 300°F.

Part#	Item#	Case/Order#	Size	Units/cs
SL3150	1007873	1007872	14 oz cartridge	10
SL3151	1007875	1007874	14 oz can	12
SL3155	1007876	1007876	35 lb pail	1
SL3360	1007916	1007915	10 oz tube	6



#### LITHIUM GENERAL PURPOSE GREASE

Lithium base NLGI-2 grease designed for light-duty applications. Use on motor bearings, pump bearings and light-duty applications. Drop point: 340°F.

Part#	Item#	Case/Order#	Size	Units/cs
SL3310	1007904	1007903	14 oz cartridge	10



## CONSTANT VELOCITY (C.V.) JOINT GREASE

Extremely stable lithium-base grease with molybdenum disulfide extends C.V. joint life. Will not attack or run out of C.V. boot. Protects against rust and oxidation. Contains extreme pressure and anti-wear additives.

Part#	Item#	Case/Order#	Size	Units/cs
SL3174	1007886	1007885	4 oz tube (carded)	12



## SYNTHETIC BRAKE & CALIPER GREASE

Synthetic grease prevents caliper binding, vibration and corrosion. Contains molybdenum, PTFE and graphite for an extreme temperature range of -40°F to 495°F. Eliminates uneven pad wear.

Part#	Item#	Case/Order#	Size	Units/cs
05353	1003789	1003788	12 oz tub	12
05359	1003791	1003790	8 oz bottle	6
SL3301	1007898	1007897	2.5 oz tube	6
SL3303	1007902	1007901	12 oz tub	12



## MOLY-GRAPH®

### Extreme Pressure Multi-Purpose Grease

Molybdenum and graphite establish a fine micron plating on all surfaces. Lithium-base NLGI-2 grease with drop point of 350°F. Great for use on ball joints, chassis points, bushings and roller bearings.

Part#	Item#	Case/Order#	Size	Units/cs
SL3144	1007868	1007867	3/3 oz cartridges	6
SL3330	1007910	1007909	14 oz cartridge	10



## LITHIUM COMPLEX-BASED

### DRILLER RED GREASE

Premium lithium complex, Extreme Pressure (EP) grease with an industry high 80+ lb Timken OK load. Driller Red Grease is designed to withstand greater amounts of pressure, especially in oil and gas applications. It offers superior wear and shock load protection to applications with high axial or thrust loads.

Part#	Item#	Case/Order#	Size	Units/cs
SL3640	1007959	1007958	14 oz cartridge	10
SL3650	1007960	1007960	35 lb pail	1



## EXTREME PRESSURE ENGINE ASSEMBLY LUBE

Prevents friction, galling and wear on all types of engine components during assembly, start-up and break-in periods.

Part#	Item#	Case/Order#	Size	Units/cs
SL3331	1007912	1007911	10 oz tube	6



## SYNTHETIC-BASED

### SILARAMIC®

#### Brake System Grease

Protects all moving caliper hardware, mating surfaces and backing plates with the latest rust, oxidation and anti-wear additives to provide lasting protection against friction, wear and corrosion. Ideal for high-performance or racing applications.

Part#	Item#	Case/Order#	Size	Units/cs
05361	1003793	1003792	5 oz tube	12



## Extreme Pressure STA-PLEX™ PREMIUM RED GREASE

A superior, multi-purpose, lithium-complex-based NLGI-2 GC-LB grease. Contains extreme pressure, anti-wear and anti-oxidation additives. Ideal for high-temperature and performance applications. Drop point: 500°F.

Part#	Item#	Case/Order#	Size	Units/cs
SL3190	1007890	1007889	14 oz cartridge	10
SL3191	1007892	1007891	14 oz can	12
SL3195	1007895	1007895	35 lb pail	1



## SILICA

### SYNTHETIC FOOD GRADE GREASE

NSF H1 Registered for incidental food contact. NLGI-2 lubricating grease formulated with the highest quality synthetic NSF registered raw materials available. Performs extremely well in cold temperature applications, as the base fluid exhibits a very low pour point. Resists rust and oxidation. Water wash-down resistant. Wide temperature range – provides superior lubrication from -30°F to 450°F.

Part#	Item#	Case/Order#	Size	Units/cs
SL35610	1007928	1007927	14 oz cartridge	10



## NEW GENERATION™ WHEEL BEARING GREASE

For Disc and Drum Brakes

Meets late-model high-tech specifications. NLGI-2 GC-LB lithium-complex base. Wide temperature range of -40°F to 325°F. Use on late-model wheel bearings, chassis and suspension points.

Part#	Item#	Case/Order#	Size	Units/cs
SL3111	1007854	1007853	14 oz can	12



## ALUMINUM COMPLEX-BASED

### MULTI-PURPOSE FOOD GRADE GREASE

NSF H1 Registered. Aluminum complex, NLGI-2 grease. Meets FDA regulation 21 CFR 178.3570 for incidental food contact. Appropriate for food processing and handling equipment. Will not pound out of bearings and bushings during shock loads.

Part#	Item#	Case/Order#	Size	Units/cs
SL35600	1007924	1007923	14 oz cartridge	10
SL35605	1007925	1007925	35 lb pail	1



## CALCIUM SULFONATE

### EXTREME DUTY FOOD GRADE GREASE

NSF H1 Registered for incidental food contact. NLGI-2 high performance lubricating grease excels in applications where resistance to water wash-out and broad operating temperatures are absolutely necessary. Provides unsurpassed resistance to extreme pressures and corrosion, including salt spray. Timken OK Load of 65 lbs. Wide temperature range – provides superior lubrication from -20°F to 400°F.

Part#	Item#	Case/Order#	Size	Units/cs
SL35615	1007931	1007930	14 oz cartridge	10



## MARINE BOAT TRAILER AND 4x4 WHEEL BEARING GREASE

NLGI-2 grease. Excellent water resistance. Superior rust and corrosion protection. Typical drop point: 500°F.

Part#	Item#	Case/Order#	Size	Units/cs
SL3120	1007856	1007855	14 oz cartridge	10
SL3121	1007858	1007857	14 oz can	12
SL3184	1007888	1007887	3-3 oz cartridge	6





NSF H1 Food Grade Grease	NSF Registration	NLGI Grade	Base Oil	Base Oil Viscosity@40°C	Thickener	Drop Point °F	Worked Penetration
Multi-Purpose Food Grade Grease	H1	2	Mineral	100- 140	Aluminum Complex	500	265-295
Synthetic Food Grade Grease	H1	2	PAO	60-65	Silica	650	265-295
Extreme Duty Food Grade Grease	H1	2	Mineral	90-110	Overbased Calcium Sulfonate	600	265-295

PRODUCT	Grease Type	NLGI Grade	Color	Working Temperature	Water Resistance	Timken OK Load	4 Ball EP Weld
Super White™ Multi-Purpose Grease	Lithium	2	White	0°F to 300°F	Good	N/A	315 kg
Lithium General Purpose Grease	Lithium	2	Amber	0°F to 250°F	Very Good	40 lbs	315 kg
Constant Velocity Joint Grease	Lithium	1.5	Dark Gray	N/A	Good	60 lbs	400 kg
Moly-Graph® Extreme Pressure Multi-Purpose Grease	Lithium	2	Dark Gray	0°F- 290°F	Very Good	45 lbs	200 kg
Extreme Pressure Engine Assembly Lube	Lithium	0.5	Black	0°F to 300°F	N/A	N/A	N/A
Silaramic® Brake System Grease	Synthetic/Silicone	2	Off White	-50°F to 3000°F	Excellent	N/A	N/A
Driller Red Grease	Lithium Complex	2	Red	-10°F to 400°F	Excellent	80+ lbs	315 kg
Sta-Plex™ Extreme Pressure Premium Red Grease	Lithium Complex	2	Red	-10°F to 325°F	Excellent	60 lbs	315 kg
New Generation™ Wheel Bearing Grease for Disc and Drum Brakes	Lithium Complex	2	Amber	-40°F to 325°F	Very Good	60 lbs	315 kg
Synthetic Brake & Caliper Grease	Synthetic	2	Black	-40°F to 495°F	Excellent	60 lbs	N/A
Marine Boat Trailer and 4x4 Wheel Bearing Grease	Calcium Sulfonate Complex	2	Blue	0°F to 350°F	Excellent	60 lbs	500 kg

# MOLD RELEASES

## GENERAL PURPOSE SILICONE MOLD RELEASE

A general-purpose mold release used for a variety of applications including injection molding, compression molding, blow molding and extruding. Provides fast and easy part removal from molds. Medium-duty silicone content 3.5%. Ideal for use on cold and hot metals.

Part#	Item#	Case/Order#	Size	Units/cs
03300	1003488	1003487	16 oz aerosol	12



## BORON NITRIDE MOLD RELEASE

Ideal when working with the latest high-temperature resins. It is also an excellent release for die-casting of low-melting-point metals such as lead, zinc and aluminum. Forms a non-reacting layer with molten metals, salts, fluxes and slags. High electrical resistance and thermal conductivity.




Part#	Item#	Case/Order#	Size	Units/cs
03310*	1003496	1003495	16 oz aerosol	12



## FOOD GRADE SILICONE MOLD RELEASE

Formulated to be used for light-duty applications. Contains the same high-quality ingredients as our General Purpose Silicone Mold Release. Light-duty silicone content 3%. NSF M1 Registered.


Part#	Item#	Case/Order#	Size	Units/cs
03301	1003490	1003489	16 oz aerosol	12

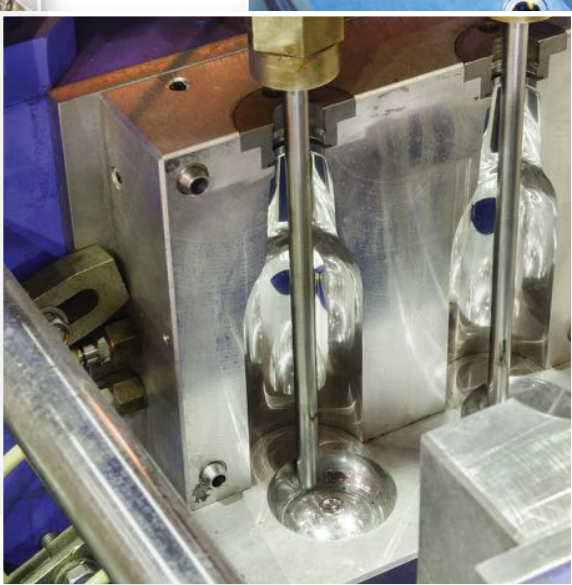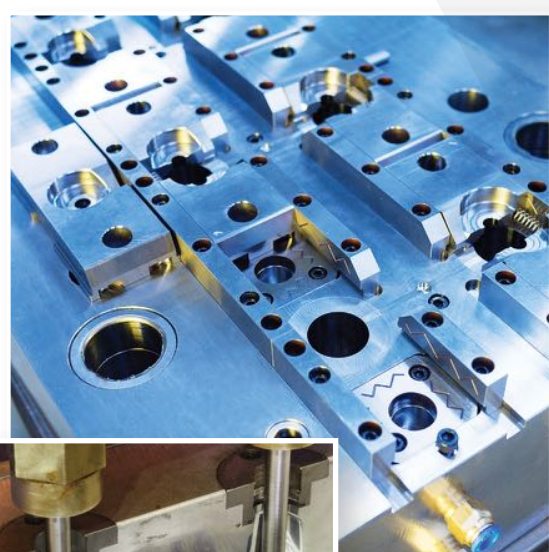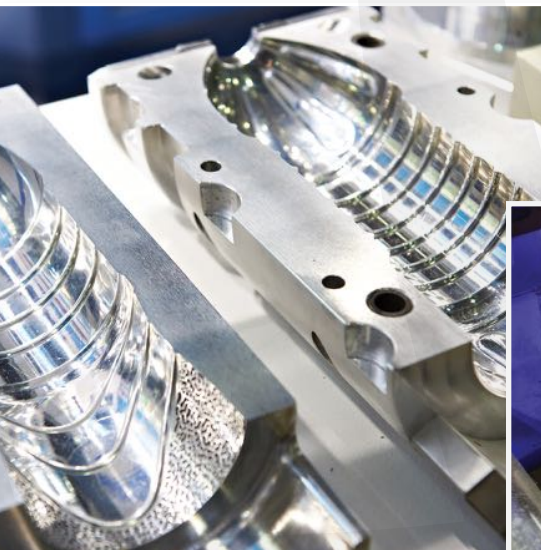

\*This product is labeled extremely flammable. Read and observe the special usage warning on the label. Do not apply while equipment is energized.

MOLD RELEASE CHARACTERISTICS	#03300 General Purpose	#03301 Food Grade	#03310 Boron Nitride
No ozone depleting chemicals	◆	◆	◆
Ultrasonic welding compatible			◆
Safe on solvent sensitive plastics	◆	◆	◆
Odorless	◆	◆	◆
MOLD RELEASE / RESIN RECOMMENDATION	#03300 General Purpose	#03301 Food Grade	#03310 Boron Nitride
ABS	◆	◆	◆
Acetal	◆	◆	◆
Acrylic	◆	◆	◆
Noryl®	◆		
Nylon	◆	◆	
Polycarbonate	◆	◆	◆
Polystyrene	◆	◆	◆
Polysulfone	◆	◆	
Rubber	◆	◆	
Wax	◆	◆	

This release/resin recommendation chart is intended to be a general guide based on field testing performed over the last 45 years. Always pre-test any release with a particular resin. Mold configuration and conditions can greatly affect part release ability.

PRODUCT	Type	Film Type	Paint Compatible	Temperature Range	SDS Label Attached	Container Size
General Purpose Silicone Mold Release	Silicone	Non-Drying	No	Up to 600°F	Yes	 16
Food Grade Silicone Mold Release	Silicone	Non-Drying	No	Up to 600°F	Yes	 16
Boron Nitride Mold Release	Boron Nitride	Dry	Yes	Up to 1800°F	Yes	 16

Noryl® is a registered trademarks of SABIC GLOBAL TECHNOLOGIES B.V.

INSECTICIDES

WASP & HORNET KILLER PLUS™  
Insecticide

Fast-acting, high-strength insecticide that knocks down and kills wasps, hornets, fire ants, black widow spiders and scorpions on contact. Contains no chlorinated solvents. Safe on most plastics. CRC trigger provides a dense, accurate spray that will reach up to 20 feet to drench harmful insects and their nests. High dielectric strength of 47,600 volts. Extension tube doubles as a locking mechanism.

Part#	Item#	Case/Order#	Size	Units/cs
14010	1004768	1004767	20 oz aerosol trigger	12



BEE BLAST®  
with Residual Wasp & Hornet Killer

Fast-acting, high-strength insecticide that instantly soaks harmful insects and their nests with a high-output 20-foot jet blast. Bee Blast® contains no chlorinated solvents and is safe on most plastics. High-output 20-foot jet blast kills wasps, hornets, yellow jackets and bees on contact. Safety Data Label S.D.[L.]® right on the can. Strength of 47,300 volts. Kills with residual-action as wasps and hornets return to nests.

Part#	Item#	Case/Order#	Size	Units/cs
14009	1004766	1004765	20 oz aerosol	12



14010 and 14009 are not registered outside the United States and Puerto Rico.

EQUIPMENT

FLUID OIL PUMP

Constructed of durable PVC plastic. For all fluid reservoirs including differentials, transmissions and gear cases. Dispenses 1 fl oz of product with each depression. Designed to fit all Sta-Lube® quart, half-gallon and gallon containers. Not for use with brake fluid.

Part#	Item#	Case/Order#	Units/cs
SL4344	1007963	1007962	6





## CLEANERS

### BRÄKLEEN®

#### Brake Parts Cleaner

Quickly removes brake fluid, grease, oil and other contaminants from brake linings and pads. Helps brakes last longer and perform more efficiently.

Part#	Item#	Case/Order#	Size	Units/cs
05089 <sup>1</sup>	1003708	1003706	20 oz aerosol	12
05090 <sup>1</sup>	1003713	1003712	1 gal bottle	4
05091 <sup>1</sup>	1003714	1003714	5 gal pail	1
05093 <sup>1</sup>	1003715	1003715	55 gal drum	1



### BRÄKLEEN®

#### Brake Parts Cleaner, 50 State Formula

Removes brake fluid, grease, oil and other contaminants quickly and effectively. Non-chlorinated. Degreases instantly. Leaves no residue. Meets all state & federal consumer products VOC regulations. **Low VOC formula.**<sup>∞</sup>

Part#	Item#	Case/Order#	Size	Units/cs
05050*	1003662	1003660	20 oz aerosol	12
05051*	1003666	1003665	1 gal bottle	4
05052*	1003667	1003667	5 gal pail	1
05053*	1003668	1003668	55 gal drum	1



### BRÄKLEEN®

#### Non-Chlorinated Brake Parts Cleaner

Use where compliance calls for a chlorine-free product. Quickly removes brake fluid, grease, oil and other contaminants from brake linings and pads.

Part#	Item#	Case/Order#	Size	Units/cs
05088 <sup>1</sup> *	1003704	1003703	20 oz aerosol	12
05085 <sup>1</sup> *	1003700	1003699	1 gal bottle	4
05186 <sup>1</sup> *	1003747	1003747	5 gal pail	1
05087 <sup>1</sup> *	1003702	1003702	55 gal drum	1
<b>Less than 45% VOC</b> <sup>∞</sup>				
05084 <sup>1</sup> *	1003696	1003695	20 oz aerosol	12
05086 <sup>1</sup> *	1003701	1003701	5 gal pail	1



### BRÄKLEEN®

#### ProSeries Brake Parts Cleaner

Larger cans with increased fill weights of Brakleen® Brake Parts Cleaner. 10 more ounces in the Pro Series can. Perfect for use in professional applications. PowerJet® Spray Nozzle on every can.

Part#	Item#	Case/Order#	Size	Units/cs
05050PS*	1008009	1003663	24 oz aerosol	12
05084PS <sup>1</sup> *	1008010	1003697	24 oz aerosol	12
05088PS <sup>1</sup> *	1008011	1003705	24 oz aerosol	12
05089PS <sup>1</sup>	1008012	1003709	24 oz aerosol	12



### BRÄKLEEN®

#### Non-Chlorinated Brake Parts Cleaner

Cleans and dries fast; leaves no residue. Instantly removes brake fluid, grease & oil. SCAQMD Rule #1171 compliant. Contains no chlorinated solvents. **Ultra-Low VOC formula.**<sup>∞</sup>

Part#	Item#	Case/Order#	Size	Units/cs
05151*	1003740	1003739	20 oz aerosol	12



<sup>∞</sup> – As defined by Consumer Products VOC regulations.

<sup>1</sup> – Item restricted from sale in some states. See product page on CRC website for specific restrictions.

\*This product is labeled extremely flammable. Read and observe the special usage warning on the label. Do not apply while equipment is energized.

# VEHICLE MAINTENANCE

## MASS AIR FLOW

### Sensor Cleaner

Safely cleans and protects mass air flow sensors. Plastic-safe, dries rapidly and leaves no residue. Vehicle will typically gain 4 to 10 horsepower after using. Reduces rough idle.


Part#	Item#	Case/Order#	Size	Units/cs
05110*	1003729	1003728	16 oz aerosol	12



## ENGINE DEGREASER

Quickly lifts grease and grime off engines for cooler, more efficient performance. Leaves no residue. Easy to use – just spray on and rinse off.

Part#	Item#	Case/Order#	Size	Units/cs
05025 <sup>1</sup>	1003645	1003642	20 oz aerosol	12
05025CA	1003644	1003643	20 oz aerosol	12



## THROTTLE BODY & AIR-INTAKE CLEANER

Removes gum and varnish from throttle valves and throttle body for easier starting and smoother engine performance. Low-VOC formula.<sup>∞</sup> Eliminates hesitation and rough idling.

Part#	Item#	Case/Order#	Size	Units/cs
05078*	1003688	1003687	16 oz aerosol	12



## CLEAN-R-CARB™

### Carburetor Cleaner

Instantly dissolves deposits on venturies, linkages, butterflies and PCV systems. Improves fuel system performance. Harmless to catalytic converters and oxygen sensors.

Part#	Item#	Case/Order#	Size	Units/cs
05379*	1003800	1003799	16 oz aerosol	12
05081*	1003694	1003693	20 oz aerosol	12
05381*	1003802	1003801	20 oz aerosol	12



## LUBRICANTS

## FREEZE-OFF®

### Super Penetrant

Freezes and cracks rust for deep penetration and fast results. Dissolves rust, gum and corrosion. Lubricating film residue displaces water and prevents corrosion. Low-VOC formula.<sup>∞</sup>

Part#	Item#	Case/Order#	Size	Units/cs
05002*	1003613	1003612	20 oz aerosol	12



## DE-SQUEAK™

### Brake Conditioning Treatment

Prevents brake noise. Contains aluminum and graphite to plate and protect metal surfaces up to temperatures of 1800°F. Prevents rust and oxidation on drums, rotors and lug nuts. For use on disc, drum and ABS systems.

Part#	Item#	Case/Order#	Size	Units/cs
05080*	1003692	1003691	20 oz aerosol	6



## DISC BRAKE QUIET

Forms a water-resistant, high-temperature film that instantly absorbs noise and quiets disc brake squeaks and squeals. Easy to apply to new or previously installed pads.

Part#	Item#	Case/Order#	Size	Units/cs
05016	1003630	1003629	4 oz bottle	12
05017*	1003632	1003631	12 oz aerosol	12



⚡ – 360° spray valve can be sprayed in the UP or DOWN position.

∞ – As defined by Consumer Products VOC regulations.

<sup>1</sup> – Item restricted from sale in some states. See product page on CRC website for specific restrictions.

\*This product is labeled extremely flammable. Read and observe the special usage warning on the label. Do not apply while equipment is energized.



## FUEL ADDITIVES

### GASOLINE 1-TANK POWER RENEW® with G2P® Technology

Concentrated one-tank clean-up for your dirty fuel system. Maximum power restoration and deposit control. Helps increase MPG. Boosts power instantly.

Part#	Item#	Case/Order#	Size	Units/cs
05815	1003859	1003858	16 oz bottle	6



## DIESEL FUEL ADDITIVES

### DIESEL FUEL THERAPY® Diesel Injector Cleaner Plus

Cleans injectors, conditions and stabilizes fuel and lubricates fuel system for increased engine life. Increases power and fuel economy and reduces emissions. ULSD approved. OK for Biodiesel.

Part#	Item#	Case/Order#	Size	Units/cs
05232	1003753	1003752	1 quart bottle	12



### DIESEL FUEL THERAPY® Diesel Injector Cleaner with Anti-Gel

Prevents diesel fuel from gelling in cold temperatures. Lowers pour point, cleans injectors and helps restore spray pattern for more efficient combustion. ULSD approved. OK for Biodiesel.

Part#	Item#	Case/Order#	Size	Units/cs
05432	1003811	1003810	1 quart bottle	12



## WINTER PRODUCTS

### DIESEL AIR BRAKE ANTI-FREEZE & CONDITIONER

Provides complete winter protection for air brake systems. Eliminates and prevents moisture accumulation and icing. Prevents damage to air brake seals. Anti-freeze and anti-rust.

Part#	Item#	Case/Order#	Size	Units/cs
05532	1003822	1003821	32 oz bottle	12
05528	1003820	1003819	1 gal bottle	4



### JUMP START® Starting Fluid with Lubricity

Assures fast, economical starts in extremely cold or humid climates. Upper cylinder lubricant minimizes wear during cold starts. Effective to -65°F. For diesel and gasoline engines. ULSD approved.

Part#	Item#	Case/Order#	Size	Units/cs
05671*	1003843	1003842	16 oz aerosol	12



### ICE-OFF® Windshield Spray De-Icer

Melts ice, snow and frost on contact. Harmless to car finish. Thaws frozen locks.

Part#	Item#	Case/Order#	Size	Units/cs
05346	1003777	1003776	16 oz aerosol	12



## UNDERCOATING

### RUBBERIZED UNDERCOATING

Provides a bubble-free, flexible shield against moisture, salt and road debris. Deadens outside road noise and will not crack or peel. Low-VOC formula.∞

Part#	Item#	Case/Order#	Size	Units/cs
05347*	1003779	1003778	20 oz aerosol	12



∞ – As defined by Consumer Products VOC regulations.

\*This product is labeled extremely flammable. Read and observe the special usage warning on the label. Do not apply while equipment is energized.



## LUBRICANTS

### MARINE 6-56®

#### Multi-Purpose Lube

Clear, thin film lubricates and protects against wear and saltwater corrosion. Drives out moisture to help start wet engines. Loosens rusted parts. Will not harm oxygen sensors.

Part#	Item#	Case/Order#	Size	Units/cs
06006	1003879	1003878	12 oz aerosol	12
06007	1003881	1003880	16 oz aerosol	12
06008	1003883	1003882	1 gal bottle	4



### MARINE HEAVY DUTY SILICONE LUBRICANT

Clean, odorless, highly water resistant; fights corrosion. Lubricates and protects wood, nylon, metal, canvas and leather. Eliminates squeaking and binding. Wide temperature range (-40°F to 400°F).

Part#	Item#	Case/Order#	Size	Units/cs
06077*	1003911	1003910	16 oz aerosol	12



## CORROSION INHIBITORS

### SALT TERMINATOR®

#### Engine Flush, Cleaner & Corrosion Inhibitor

Dissolves destructive salt debris that can't be removed by water alone without leaving a residue. Leaves a protective coating, guarding against future corrosion.

Part#	Item#	Case/Order#	Size	Units/cs
SX32M	1007976	1007975	32 oz bottle w/mixer	6
SX128	1007968	1007966	1 gal bottle	6
SXMXR	1007980	1007979	mixer only	12



### MARINE ENGINE STOR®

#### Fogging Oil

Protects electrical connections, outboard motors and marine engines to ensure longer life. Keeps engine components corrosion-free during seasonal storage. Preserves reels, tools, and metal surfaces subject to rust.

Part#	Item#	Case/Order#	Size	Units/cs
06068	1003904	1003903	16 oz aerosol	12



## FUEL ADDITIVES

### MARINE FUEL STABILIZER GASOLINE FORMULA

For all 2 and 4-cycle engines. Protects against corrosion during storage. Prevents gum and resin build-up; keeps filters and injectors clean. Non-staining.

Part#	Item#	Case/Order#	Size	Units/cs
06161	1003927	1003926	8 oz bottle	12
06164	1003933	1003932	1 gal bottle	4



## CLEANERS

### ON & OFF

#### Hull & Bottom Cleaner

Removes waterline stains, algae stains, rust and gas exhaust stains. Use on fiberglass only. Easy to use – brush it on, rinse it off.

Part#	Item#	Case/Order#	Size	Units/cs
MK2032	1007569	1007568	1 quart bottle	12
MK20128	1007567	1007566	1 gal bottle	4
MK20550	1007570	1007570	55 gal drum	1



### ON & OFF GEL

#### Hull & Bottom Cleaner

Unique viscous formula that clings to the surface to break down grease, oil and scum lines and stains. Blue color for easy visualization. Easy to use – brush it on and rinse it off.

Part#	Item#	Case/Order#	Size	Units/cs
MK3532	1007600	1007599	1 quart bottle	12



### ALUMINEX™

#### Pontoon & Aluminum Hull Cleaner

Specially formulated for cleaning hulls and bottoms of aluminum and pontoon boats. Quickly removes waterline stains, lime deposits, algae stains and oxidation.

Part#	Item#	Case/Order#	Size	Units/cs
MK3132	1007594	1007593	1 quart bottle	12
MK31128	1007592	1007591	1 gal bottle	4



\*This product is labeled extremely flammable. Read and observe the special usage warning on the label. Do not apply while equipment is energized.



**CLEANING DETAIL®****Non-Skid Deck Cleaner**

Cleans and brightens fiberglass, stainless steel, chrome, brass and aluminum. Use on most surfaces above the waterline. Great for non-skid decks, shower stalls and tubs.

Part#	Item#	Case/Order#	Size	Units/cs
MK2132	1007572	1007571	1 quart bottle	12

**MILDEW STAIN REMOVER**

Quickly removes even the toughest mildew and mold stains. Fine mist spray won't run, even on vertical surfaces. No scrubbing necessary. Just spray on; wipe off. Use on any vinyl or hard surface. Safe on boat covers and marine fabrics.

Part#	Item#	Case/Order#	Size	Units/cs
MK3732	1007604	1007603	1 quart spray bottle	12

**SPRAY AWAY™****All Purpose Cleaner**

Cleans grease, grime, oil, rain stains, fish blood and more. Great on virtually any surface. Non-flammable.

Part#	Item#	Case/Order#	Size	Units/cs
MK2832	1007590	1007589	1 quart spray bottle	12

**SUPER SUDS™****Boat Soap**

Highly concentrated synthetic detergent. Non-streaking. Leaves no residue. Cleans away dirt and grime, leaving surfaces sparkling clean. Will not strip wax.

Part#	Item#	Case/Order#	Size	Units/cs
MK2232	1007576	1007575	1 quart bottle	12



## AVIATION MAINTENANCE

**AVIATION XT-2000™**  
**PRECISION CLEANER**

A non-flammable, low-odor, rapidly evaporating precision cleaner for use in aviation applications. Effectively removes dirt, light oils and other contaminants from electronic equipment. No flash point. Evaporates rapidly leaving no residue. Chemically stable, non-conductive and non-corrosive. Safe on most plastics. Meets performance requirements of Boeing BSS7432.

Part#	Item#	Case/Order#	Size	Units/cs
10315	1004730	1004729	16 oz aerosol	12

**AVIATION T-FORCE®**  
**DEGREASER**

Effective heavy-duty, non-flammable degreaser. Evaporates quickly and leaves no residue. Airframe-approved non-HAP degreaser. Meets performance requirements of Boeing BSS7432.

Part#	Item#	Case/Order#	Size	Units/cs
10321 <sup>1</sup>	1004732	1004731	20 oz aerosol	12



🌀 – 360° spray valve can be sprayed in the UP or DOWN position.

<sup>1</sup> – Item restricted from sale in some states. See product page on CRC website for specific restrictions.



# RUST REMOVER

## CRC EVAPO-RUST® HEAVY-DUTY RUST REMOVER

CRC Evapo-Rust® is a non-corrosive, water-based rust remover for easy and effective restoration. The award-winning formula is specifically designed to remove rust to bare metal, with no scrubbing or sanding required. Just pour, soak and rinse to remove even the toughest rust. This powerful solution is also reusable, with each container providing multiple treatments and long-lasting efficacy.



BEFORE EVAPO-RUST®

AFTER EVAPO-RUST®



### EVAPO-RUST® Heavy-Duty Rust Remover

Evapo-Rust® is a non-corrosive rust remover dip for restoring your rusty treasures. With Evapo-Rust® you can remove rust to bare metal without sanding or scrubbing. The solution comes ready to use with no need for mixing. It's simple and easy – just soak, rinse and reuse.



Part#	Item#	Case/Order#	Net Fill	Units/cs
ER004	1752536	1752537	32 oz bottle	4
ER012	1752538	1752539	1 gal bottle	4
ER018	1752540	1752540	3.5 gal pail	1
ER013	1752542	1752542	5 gal pail	1
ER014	1752543	1752543	55 gal drum	1
ER015	1752544	1752544	275 gal tote	1

### RUST-BLOCK™ Water-Based Rust Inhibitor

Rust Block™ is a liquid compound that inhibits rust on all ferrous metals. Use it to protect your tools, auto parts, hardware, garden equipment and more.

Part#	Item#	Case/Order#	Net Fill	Units/cs
RB023	1753019	1753020	12 oz aerosol	6
RB018	1753023	1753023	5 gal pail	1



### THERMOCURE® Cooling System Rust Remover & Flush

Thermocure® Cooling System Rust Remover & Flush uses the latest technology in rust and corrosion removal to completely revitalize any water-cooled engine. Thermocure® removes rust scale and deposits from radiators, water pumps, water jackets, engine blocks and heads. Thermocure® cooling system flush is simple and easy to use. This product restores the engine's ability to transfer heat to the coolant, allowing engines to run cooler and essentially last longer!



### EVAPO-RUST® GEL

Evapo-Rust® Gel combines the rust removing power of Evapo-Rust® with the ability to cling to vertical, rusted surfaces. Simply brush on and allow an hour to work, then rinse away the rust with water. Evapo-Rust® Gel does not harm copper, brass, aluminum, glass or plastic.



Part#	Item#	Case/Order#	Net Fill	Units/cs
ER088	1752903	1752904	8 oz bottle	6

Part#	Item#	Case/Order#	Net Fill	Units/cs
TC001	1752849	1752850	32 oz bottle	4

PRODUCT	Base Type	Appearance	Application Method	Working Time	Container Size
Evapo-Rust®	Water-based	Colorless to light yellow	Soak	A few hours to overnight	32 1 3.5 5 55 275
Evapo-Rust® Gel	Water-based	White	Brush on	1-2 hours	8
Rust-Block™	Water-based	White	Spray	15-30 minutes	12 5
Thermocure®	Water-based	Colorless to light yellow	Pour in	A few hours to two days	32



**SOAK.  
RINSE.  
REUSE.**



RUST REMOVER



# GLOSSARY OF TERMS

## BIODEGRADABLE

A substance that is capable of being broken down into harmless products by the action of living things. The rate at which compounds may be chemically broken down by bacteria and/or natural environmental factors.

## CONSUMER PRODUCTS VOC REGULATIONS

Several states have restrictions on the amount of Volatile Organic Compounds (VOC) that can be present in consumer and institutional use products. VOC limits are set by product category. There are a wide range of regulated categories including cleaners, degreasers, lubricants, adhesives, sealants and automotive cleaners.

## DIELECTRIC STRENGTH

The minimum electrical gradient that a material can withstand without decomposition usually specified in volts per millimeter of thickness. Also known as the breakdown voltage.

## ELONGATION PERCENT

Directly related to Tensile Strength. Elongation is the deformation that results from the application of a tensile force and is calculated as the change in length divided by the original length.

## EMULSION

A mixture of water-soluble and water-insoluble groups held together by a surfactant. Emulsions are usually milky white.

## EXTREMELY FLAMMABLE

As defined by the Consumer Products Safety Commission, a substance with a flashpoint at or below 20°F as determined by Tagliabue Closed Cup Tester. Or, for an aerosol, if the flame travels back to the actuator and the flashpoint is at or below 20°F.

## FALEX TEST

A method for determining the extreme pressure (EP) or anti-wear properties of oils and greases. Vee blocks (with large "V-shaped notch) are placed on opposite sides of rotating steel shaft, and the apparatus is immersed in the test lubricant. Load is automatically increased until seizure occurs. Measurable wear scars are formed on the blocks.

## FERROUS

Metals related to or containing iron.

## FLAMMABLE

Capable of catching fire easily and burning rapidly. OSHA defines flammable liquids as having a flashpoint below 100°F.

## FLASH POINT

The lowest temperature of a liquid or solid at which it gives off vapors that will ignite but not continue to burn when a small flame is periodically passed over the surface.

## GALLING

Destructive wear of a metal surface characterized by large chunks of metal being removed.

## KB VALUE

The Kauri Butanol (KB) value is a measure of the solvent power of a hydrocarbon liquid. Kauri gum is readily soluble in butanol but insoluble in hydrocarbons. The KB value is the measure of the volume of solvent required to produce turbidity in a standard solution containing kauri gum dissolved in butanol. The higher the KB value, the more powerful the solvent.

## NLGI GRADE

National Lubricating Grease Institute. A numerical scale for classifying the consistency of a particular grease. The most common consistency number is #2. Softer grades, especially #0 and #1, are often used for improved pumpability or low-temperature service. High consistency numbers, #3 through #6 are used for certain high-speed bearings where leakage and sealing are particular concerns.

## NSF RATING

National Sanitation Foundation Registration Program for Proprietary Substances and Nonfood Compounds. This program mirrors the prior USDA program. Product evaluation is based on formulation and label review. Approved products receive a Letter of Authorization and are included on the NSF White Book List of Proprietary Substances and Nonfood Compounds.

## NON-FERROUS

Metals that contain no iron.

## ODCs

Ozone Depleting Compounds. Substances that contribute to the deterioration of the ozone. There are two types of ODCs: Class I and Class II ozone depleters. Class I ODCs are the most harmful to the ozone. Currently listed as Class I ODCs are chlorofluorocarbons (CFCs), carbon tetrachloride,

and 1,1,1-Trichloroethane. Class II ODCs are less harmful but still pose a threat. Currently listed as Class II ODCs are HCFCs.

## PH

A scale ranging from 0 to 14 used to measure acidity and alkalinity. The lower the number the more acidic; the higher the number, the more alkaline; 7 is neutral.

## PSI

Pound per Square Inch. A unit of pressure equal to the pressure resulting from a force of 1 pound applied uniformly over an area of 1 square inch.

## SAE

Society of Automotive Engineers.

## SUBSTRATE

The surface being cleaned; the substrate may be metal, plastic, ceramic, etc.

## SURFACTANT

A specialized molecule that connects water soluble and water-insoluble groups.

## TENSILE STRENGTH

The strength of different metals to support different loads (masses) before going through the point at which they change from being elastic to being plastic. The tensile strength test measures the elastic and plastic properties of metal.

## TIMKEN OK LOAD

The highest load than can be applied without abrasive wear to a rotating test cup containing a grease sample. The higher the OK number, the better protection a grease provides under severe service. The highest number typically given to any sample is 80.

## VISCOSITY

The resistance to flow or degree of thickening fluid. Flow requires stress; liquids such as additive-free lubricating oils are known as Newtonian fluids in that shear rate is proportional to the pressure or stress applied. This proportion is the coefficient of viscosity.

## VOCS

Volatile Organic Compounds. A class of chemicals that contain carbon and have the potential to form ground-level ozone (smog). Many common items including gasoline, oil-based paints and alcohols produce VOCs.



**CATEGORY CODE 3H**

This product is acceptable for use as a Release Agent on grills, ovens, loaf pans, boning benches, chopping boards, or other hard surfaces in contact with meat and poultry food products to prevent food from adhering during processing.

**CATEGORY CODE A1**

This product is acceptable for use as a general cleaning agent on all surfaces, or for use with steam or mechanical cleaning devices in all departments. Before using this compound, food products and packaging materials must be removed from the room or carefully protected. After using this compound, surfaces must be thoroughly rinsed with potable water. Permission for the use of this compound on loading docks and other similar areas is left to the discretion of the Inspector-In-Charge of the establishment.

**CATEGORY CODE C1**

This product is acceptable for use as a general cleaner/degreaser in inedible product processing areas, and/or exterior areas of official establishments operating under the Federal Meat, Poultry, Shell Egg Grading, and Egg Products Inspection Programs provided that it is not used to mask odors resulting from unsanitary conditions, and that any characteristic odor or fragrance does not penetrate into an edible area. Permission for the use of this compound on loading docks and other similar areas is left to the discretion of the Inspector-In-Charge of the establishment.

**CATEGORY CODE C3**

The product is acceptable for use in official establishments operating under the Federal Meats and Poultry Products Inspection Program. This compound may be acceptable in areas of food processing facilities where edible products are neither processed nor stored in open containers. This category also covers paint removers and snow and ice melting products intended for use in non-processing areas.

**CATEGORY CODE D2**

This product is acceptable for use as a sanitizer on all surfaces not always requiring a rinse in and around food processing areas. Before using this compound, food products and packaging materials must be removed from the room or carefully protected. A potable water rinse is not required following the use of this compound on previously cleaned hard surfaces provided that the surfaces are adequately drained before contact with food so that little or no residue remains which can adulterate or have a deleterious effect on edible products. A potable water rinse is required following use of this compound under conditions other than stated above. The compound must always be used according to applicable label directions.

**CATEGORY CODE E4**

The product is acceptable for use as a hand cream, lotion or cleaner in non-processing areas. The use of such products is limited to toilets, dressing rooms and other non-processing areas. Employees who handle edible products may use such compounds only when leaving the plant.

**CATEGORY CODE H1**

This product is acceptable as a lubricant with incidental food contact for use in official establishments operating under the Federal Meat and Poultry Products Inspection Program. Such compounds may be used on food processing equipment as a protective anti-rust film, as a release agent on gaskets or seals of tank closures, and as a lubricant for machine parts and equipment in locations in which there is potential exposure of lubricated part to food. The amount used should be the minimum required to accomplish the desired technical effect on the equipment. If used as an anti-rust film, the compound must be removed from the equipment surface by washing or wiping, as required to leave the surface effectively free of any substance, which could be transferred to food being processed. The final granting of authorization for the proposed use of such compound is the responsibility of the Inspector-In-Charge of the official plant.

**CATEGORY CODE H2**

This product is acceptable as a lubricant where there is no possibility of food contact in official establishments operating under the Federal Meat and Poultry Products Inspection Program. Such compounds may be used as lubricants, release agents, or anti-rust films on equipment and machine parts or in closed systems (ex. Hydraulic systems) in locations where there is no possibility of the lubricant or lubricated part contacting edible products. The final granting of authorization for the proposed use of such compound is the responsibility of the Inspector-In-Charge of the official plant.

**CATEGORY CODE K1**

This product is chemically acceptable as a solvent cleaner for use in non-processing areas of official establishments operating under the Federal Meat and Poultry Products Inspection Program. After using the product, equipment and utensils must be thoroughly washed with an acceptable detergent solution and rinsed with potable water to remove all traces of the cleaner before being returned to the processing area. The final granting of authorization for the proposed use of such compounds is the responsibility of the Inspector-In-Charge of the official plant.

**CATEGORY CODE K2**

This product is chemically acceptable as a solvent for cleaning electronic instruments and devices which will not tolerate aqueous cleaning solutions in official establishments operating under the Federal Meat and Poultry Products Inspection Program. Before using this compound, food products and packaging materials must be removed from the area or carefully protected. This compound must be used in a manner so that all odors associated with the compound are dissipated before food products or packaging material are re-exposed in the area. The final granting of authorization for the proposed use of such compounds is the responsibility of the Inspector-In-Charge of the official plant.

**CATEGORY CODE K3**

This product is acceptable for use as an adhesive or glue remover, for removing adhesive or glue from food packaging materials in and around food processing areas, where its use is not intended for direct food contact. Before using this compound, food products and packaging materials must be removed from the area or carefully protected. After using these compounds, all surfaces must be thoroughly washed with an acceptable detergent solution, and rinsed with potable water. This compound must be used in a manner so that all odors associated with the compound are dissipated before food products or packaging materials are re-exposed in the area.

**CATEGORY CODE P1**

This product is chemically acceptable for use in official establishments operating under the Federal Meat and Poultry Products Inspection Program. This compound must be used in a manner which prevents direct or indirect contamination of edible products or potable water. The final granting of authorization for the proposed use of such compounds is the responsibility of the Inspector-In-Charge of the official plant.

**CATEGORY CODE M1**

This product is acceptable for use as a mold release agent on molds that are used to produce packaging materials that will contact food to prevent the finished product from adhering to the mold. The amount used on the equipment should be the minimum required to accomplish the effect.

**CATEGORY CODE R2**

This product is acceptable for use as a coating where there is no possibility of food contact such as floors, walls, and ceilings. The coating must be applied in a manner which prevents direct or indirect contamination of edible products. Before the food product may be placed in the area where the material is being used, the area should be sufficiently free of odor to prevent product contamination. As a safety precaution, smooth coatings should not be applied to walking or standing surfaces in processing area.



NSF logo is a registered trademark of NSF International

# CRC PRODUCT NAME INDEX

## 0 – 9

- 1st Zinc® Cold Galvanizing Primer . . .23, 24
- 1 TANK POWER RENEW® Gasoline.....45
- 2-26® Multi-Purpose Precision  
Lubricant .....30, 31
- 3-36® Multi-Purpose Lubricant . . . .16, 17

## A

- Aerosol Leak Detector .....33
- Air Tool Oil .....35
- Aluminex™ Pontoon & Aluminum  
Hull Cleaner .....46
- Anti-Seize & Lubricating Compound,  
Copper .....21, 22
- Anti-Seize & Lubricating Compound,  
Food Grade .....21, 22
- Anti-Seize & Lubricating Compound,  
Nickel .....21, 22
- Aviation T-Force® Degreaser . . . . .47
- Aviation XT-2000™ Precision Cleaner . . .47

## B

- Battery Cleaner .....9, 10
- Battery Terminal Protector .....23, 24
- Bee Blast® Wasp & Hornet Killer . . . . .42
- Bräkleen® Brake Parts Cleaner . . . . .43
- Bräkleen® Brake Parts Cleaner  
50 State Formula .....43
- Bräkleen® Brake Parts Cleaner  
Non-Chlorinated . . . . .43
- Bräkleen® Brake Parts Cleaner  
SCAQMD #1171 Compliant .....43
- Bräkleen® Pro Series .....43
- Brite Zinc® .....23, 24

## C

- Cable Clean® Degreaser . . . . .30, 31
- Cable Clean® HFT™ .....30, 31
- Cable Clean® High Voltage  
Splice Cleaner .....30, 31
- Cable Clean® RD™ . . . . .30, 31
- Carb & Choke Cleaner .....9, 10
- CET™ Precision Cleaner .....4, 6, 28
- Chain & Wire Rope Lubricant .....20, 22
- Chlor-Free® Degreaser . . . . .8, 10
- Chlor-Free® Universal Degreaser .....8, 10

- Chute Lube® Silicone Lubricant .....19, 22
- Citrus Degreaser .....8, 10, 29, 30
- Clean-R-Carb™ Carburetor Cleaner . . . .44
- Cleaning Detail®  
Non-Skid Deck Cleaner.....47
- CO® Contact Cleaner . . . . .27, 28
- Compressor Oil SAE 30 .....35
- Constant Velocity (C.V.)  
Joint Grease . . . . .37, 39

- Contact Cleaner . . . . .4, 6
- Contact Cleaner & Protectant.....5, 6
- Contact Cleaner 2000® (Electrical).....27, 28
- Contact Cleaner 2000® (Industrial).....4, 6
- Contact Cleaner 2000® VC . . . . .27, 28
- Cutting Oil .....26

## D

- Defoamer .....15
- De-Squeak™ Brake Treatment . . . . .44
- Dielectric Grease.....21, 22, 30, 31
- Diesel Air Brake Anti-Freeze &  
Conditioner .....45
- Diesel Fuel Therapy® Diesel  
Injector Cleaner Plus . . . . .45
- Diesel Fuel Therapy® Plus w/Anti-Gel.....45
- Disc Brake Quiet.....44
- Driller Red Grease .....37, 39
- Dry Graphite Lube .....20, 22
- Dry Moly Lube . . . . .20, 22
- Dry PTFE Lube . . . . .16, 17
- Duster™ Aerosol Dust  
Removal System . . . . .5, 6, 28
- Duster™ Moisture-Free

## E

- Electrical Silicone Lubricant .....30, 31
- Electrical Parts Cleaner .....29, 30
- Electronic Component Cleaner (Electrical)  
.....27, 28
- Electronic Component Cleaner (Industrial)  
.....4, 6
- Engine Degreaser .....44
- Extreme Duty Food Grade Grease  
.....38, 39
- Extreme Duty Open Gear  
& Chain Lube . . . . .20, 22

- Extreme Duty Silicone . . . . .19, 22
- Extreme Pressure Engine  
Assembly Lube . . . . .37, 39
- Evapo-Rust® Rust Remover .....48, 49

## F

- Fluid Oil Pump .....42
- Foam Minimal Expansion .....32, 34
- Foaming Coil Cleaner .....9, 10
- Food Grade Air Tool Oil . . . . .18, 19, 35
- Food Grade Belt Dressing . . . . .18, 19
- Food Grade Chain Lube.....18, 19
- Food Grade Contact Cleaner . . . . .5, 6
- Food Grade Dielectric Grease.....18, 19
- Food Grade Machine Oil . . . . .17, 19
- Food Grade Penetrating Oil . . . . .17, 19
- Food Grade Silicone . . . . .17, 19
- Food Grade White Grease . . . . .18, 19
- Food Zone Silicone Sealant –  
Clear .....32, 34
- Freeze-OFF® Super Penetrant.....44
- Freeze Spray.....5, 6

## G

- Gasket Remover .....9, 10
- GL-4 Multi-Purpose Gear Oil  
SAE 85W90 .....35, 36
- GL-4 Multi-Purpose Gear Oil  
SAE 140 .....35, 36
- GL-5 PLUS New Generation™ HD  
Limited Slip Gear Oil SAE 75W90 .....36
- GL-5 PLUS New Generation™  
Limited Slip Gear Oil SAE 80W90 .....36
- GL-5 PLUS New Generation™  
HD Limited Slip Gear Oil SAE 85W140  
.....35, 36

## H

- Heavy Duty Clear  
Penetrating Grease . . . . .20, 22
- Heavy Duty Degreaser .....7, 10
- Heavy Duty Degreaser II .....8, 10
- HFT™ Contact Cleaner (Industrial).....5, 6
- Hydraulic & Jack Oil . . . . .35
- HydroForce® All Purpose  
Degreaser. ....11, 12

- HydroForce® Butyl-Free  
Cleaner .....11, 12
- HydroForce® Foaming Citrus  
HydroForce® Germicidal  
Foam Cleaner . . . . .11, 12
- HydroForce® Glass Cleaner  
Professional Strength.....11, 12
- HydroForce® Industrial Strength  
Degreaser.....11, 12
- HydroForce® Stainless Steel  
Cleaner & Polish . . . . .11, 12
- HydroForce® Super Citrus™  
Heavy Duty Degreaser .....11, 12
- HydroForce® Zero VOC General  
Purpose Cleaner . . . . .11, 12

## I

- Ice-Off® Windshield Spray De-Icer .....45
- Industrial Adhesive Remover . . . . .9, 10
- Inner Slide Lube . . . . .21, 22
- Insect Repellent . . . . .42
- Insta-Solv® Degreaser.....9, 10
- Isopropyl Alcohol Precision Cleaner . . . .5, 6

## J

- Jump Start® Starting Fluid /Lubricity . . . .45

## K

- Knock'er Loose® Penetrating  
Solvent .....16, 17
- Knock'er Loose® Plus .....16, 17

## L

- Lectra Clean® Heavy Duty  
Electrical Parts Degreaser . . . . .29, 30
- Lectra Clean® II Non-Chlorinated  
Heavy Duty Degreaser.....29, 30
- Lectra Force™ .....29, 30
- Lithium General Purpose Grease . . . .36, 39
- Lube-Matic® Lube Pads . . . . .25, 26
- Lube-Matic® Wire Kleener & Lubricant . . .26

**M**

Marine Engine Stor® Fogging Fluid.....	46
Marine Fuel Stabilizer .....	46
Marine Grease for Boat Trailer Wheel Bearings .....	38, 39
Marine Heavy Duty Silicone Lubricant .....46 Marine 6-56® Multi-Purpose Lubricant .....	46
Mass Air Flow Sensor Cleaner .....	44
Mech Force™ Industrial Degreaser .....	8, 10
Mildew Stain Remover. ....	47
Minute Mend™ Epoxy Putty .....	33, 34
Mold Release, Boron Nitride .....	40, 41
Mold Release, Food Grade Silicone.....	40, 41
Mold Release, General Purpose Silicone.....	40, 41
Moly-Graph® Extreme Pressure Multi-Purpose Grease .....	37, 39
Multi-Purpose Food Grade Grease . .	38, 39

**N**

Natural Degreaser™ Citrus Based Degreaser .....	8, 10, 29, 30
New Generation™ Wheel Bearing Grease .....	38, 39
Nozzle-Dip HD® .....	25
Nozzle-Kleen #2® .....	25
Nozzle-Kleen HD® .....	25
Nozzle-Kleen® 107A .....	25
NT™ Precision Cleaner (Industrial) .....	4, 6

**O**

Odor Neutralizer .....	15
Oilfield Dry Moly Lube .....	20, 22
On & Off Hull & Bottom Cleaner .....	46
On & Off Gel .....	46
Ozzy Booster® .....	15
OzzyJuice® SW-3 Truck Grade Degreasing Solution.....	15
OzzyJuice® SW-4 Heavy Duty Degreasing Solution.....	15
OzzyJuice® SW-7 Parts/Brake Cleaning Solution .....	15
OzzyJuice® SW-8 Aircraft, Weapons & Select Metals Degreasing Solution .....	15
OzzyJuice® SW-X1 HP Degreasing Solution .....	15
OzzyMat® Multi-Layer .....	15

**P**

PF Precision Cleaner (Electrical) .....	27, 28
PF Precision Cleaner (Industrial) .....	4, 6
Power Lube® High Performance Lubricant .....	17

**Q**

QD® Contact Cleaner (Electrical) . . .	27, 28
QD® Contact Cleaner (Industrial) . . . .	4, 6
Quick Clean™ Safety Solvent & Degreaser .....	8, 10

**R**

Red Grease.....	20, 22
RTV Silicone Sealant – Black .....	32, 34
RTV Silicone Sealant – Blue .....	32, 34
RTV Silicone Sealant – Clear .....	32, 34
RTV Silicone Sealant – Red .....	32, 34
RTV Silicone Sealant – White. ....	32, 34
Rubberized Spray Undercoating .....	45
Rust Converter .....	23, 24

**S**

Salt Terminator® .....	46
Screwloose® Super Penetrant .....	16, 17
Silaramic® Brake System Grease .....	37, 39
SmartWasher® BenchTopPro® .....	14
SmartWasher® Covers .....	14
SmartWasher® Mobile Heavyweight Parts Washer .....	14
SmartWasher® Mobile Parts/ Brake Washer .....	14
SmartWasher® Signature Parts Washer .....	14
SmartWasher® SuperSink Parts Washer .....	14
SmartWasher® SuperSink XE Parts Washer .....	14
Smoke Test® Smoke Detector Tester .....	33
Soluble Oil .....	26
SP-350™ Corrosion Inhibitor .....	23, 24
SP-400™ Corrosion Inhibitor .....	23, 24
Spray Adhesive .....	32, 34
Spray Away™ All Purpose Cleaner.....	47
Sta-Plex™ Premium Red Grease Extreme Pressure .....	38, 39
Super Degreaser™ MUO .....	7, 10
Super Degreaser™ Plus .....	7, 10
Super Suds™ Boat Soap .....	47
Super White™ Multi-Purpose Grease .....	36, 39
Syntha-Tech™ Lubricant with PTFE .....	18, 19
Synthetic Brake & Caliper Grease.....	37, 39
Synthetic Food Grade Grease.....	38, 39

**T**

T-Force® Degreaser .....	7, 10
T-Force® Next Generation Degreaser .....	7, 10
Tac 2® Adhesive Chain Lubricant .....	21, 22
Technical Grade 3-36® .....	16, 17
Thread Lubricant.....	21, 22
Throttle Body Air Intake Cleaner .....	44

**U**

Ultra-Lite 3-36® .....	16, 17
------------------------	--------

**W**

Wasp & Hornet Killer Plus™ Insecticide .....	42
Water Based Silicone .....	18, 19
Weld-Kleen HD® .....	25
Weld-Kleen 350® .....	25
Weld-Kleen 350® AP .....	25
Welder's Anti-Spatter Spray .....	21, 22
White Lithium Grease .....	20, 22

**X**

XT-2000™ Precision Cleaner (Industrial) .....	4, 6
--	------

**Z**

Zinc-It® Bright Instant Cold Galvanize .....	23, 24
Zinc-It® Instant Cold Galvanize.....	23, 24

## CRC OFFERS CHEMICAL MANAGEMENT SOLUTIONS THROUGH OUR PROGRAMS.

### RISK REDUCTION MOBILE® (R2M™)

A program that will help save money, eliminate redundant inventory and reduce the risks associated with the procurement, use, storage and disposal of maintenance chemicals. CRC will perform a remote chemical assessment of your maintenance chemical inventory.

#### The program works in 3 easy steps:

1. Provide information on how you procure and manage the chemicals utilized in the maintenance department. (Typically, these chemicals are stored in yellow flammable cabinets.)
2. Email pictures or a list of products to your distributor partner. (If taking photos, please photograph 1 to 4 products per picture.)
3. CRC and your distributor partner does the rest!

#### CRC and your distributor partner will provide:

- A complete survey of the existing inventory with recommended CRC products.
- A "Value Document" highlighting SKU reductions, vendor consolidation and CRC's patented S.D.[L.]® Safety Data Label.
- Product samples (as requested) and follow up to answer any questions or concerns.
- Product recommendations based on identified needs.

### VALUE DOCUMENT

**MRO Value Documentation**

**OBJECTIVE:** To minimize the risks and costs associated with the acquisition and use of MRO chemicals while enabling the user to comply with federal, state, and local regulations. This can include, but is not limited to VOC regulations, potential solvent regulations, storage, and usage of their MRO Specialty Chemicals.

FACILITY NAME: \_\_\_\_\_ Facility: \_\_\_\_\_ STREET ADDRESS: \_\_\_\_\_  
CITY / STATE: \_\_\_\_\_ USA

PREPARED FOR: \_\_\_\_\_ Name: \_\_\_\_\_ DEPARTMENT / AREA: \_\_\_\_\_

DESCRIBE APPLICATION OR IMPROVEMENT AREA: Maintenance Chemical Consolidation, EHS Compliance

CREATE DATE: 12/14/2016 PREPARED BY: CRC Regional Mgr.

---

**Implementation Savings**

**SKU Reduction:** \$ 500.00 # of SKUs reduced X \$125.00. One-time reduction. 4 Duplicated items were noted in the survey.

**Chlorinated Solvent Reduction:** \$ 250.00 Multiply each product required by \$250.00 - Time Cost of Environmental and Safety MSDS review and Maintenance Staff evaluation of acceptable alternatives. Currently, a chlorinated solvent is in use. CRC can help eliminate the use of a banned chlorinated solvent by moving to a product, T-Fence, with a better health and safety profile.

---

**Sustainability and Compliance Savings**

**VOC Reduction:** # of SKUs with Reduced VOC content X \_\_\_\_\_

**Training:** # of trained workers by 190-hour trained.

**Hazards Waste:** \$ 450.00 # of SKUs with an MSDS (PM) by \$50.00. This value is derived from the benefits of having the SDS information with the can at all times in the event there is a safety incident with the use of the product.

---

**Supply Chain Savings**

**Application Savings:** Calculate actual overall savings: (ex. Reduced product usage or Labor \$ saved (man-hours) x (Labor \$/man-hour))

**Risk Minimization:** User Defined

**Productivity Improvements:** Calculate: (eg. Reduced down time: (hours) x 5 of production x # of days/weeks/month/year)

**Direct-Sell Conversions:** \$ 250.00 Multiply of Direct-Sell MRO Chemicals converted to Tier 1 Suppliers by \$125.00 per instance. By eliminating Zip and Overall, FMC Tech can realize cost savings by the eliminating vendors and moving to a preferred supplier.

*User Defined*

### SURVEY

**CRC Chemical Inventory Analysis**

Survey Date: 9/25/2016

Prepared For: Company XYZ  
Location: SOMERSET, USA  
Attention: NAME  
Department: DEPARTMENT

Regional Mgr. Name: \_\_\_\_\_  
Contact # Phone: \_\_\_\_\_  
Contact Email: Email

Distributor Name: \_\_\_\_\_  
Distributor Contact Name: \_\_\_\_\_  
Dist. Phone # Phone: \_\_\_\_\_  
Dist. Email: Email

---

**Results Summary**

Number of Replacement CRC Products: 15  
Number of Current MRO Products In Use: 15


Number of Current Manufacturers In Use: 11  
Number of In Use as a Result of Survey: 1

---

**Standard Results**

Current Manufacturer	Product	Current Pkg Type	Current Pkg Size	CUSTOMER PART #	CRC #	CRC Product Name	CRC Pkg Type	CRC Pkg Size	QSL	QSL PART #
W-40	Multi-Purpose Lubricant	Quart	11 qt	XXXXX	92008	3-500 Multi-Purpose Lubricant 8- Corrosion Inhibitor	Quart	16 Quarts	Yes	XXXXX
Loctite	Clear Paint	Quart	16 qt	XXXXX	92017	Super Remover - Paint and Seal Remover	Quart	16 Quarts	Yes	XXXXX
Liquid Wrench	Penetrating Oil	Bottle	16 oz	XXXXX	92025	Kroon's Loctet Penetrating Solvent 5- PT 26	Can	8 Quarts	No	XXXXX
Zip	HD Clear Penetrating Grease	Quart	11 qt	XXXXX	92066	Heavy Duty Clear Penetrating Grease	Quart	20 Quarts	Yes	XXXXX
Lubriplate	Clear Grease	Quart	11 qt	XXXXX	92066	Extreme Duty Open Gear and Chain Lube 15 Wt 50	Quart	16 Quarts	No	XXXXX
LPS	HDX Degreaser	Quart	16 qt	XXXXX	92118	1-Force Degreaser	Quart	20 Quarts	Yes	XXXXX
LPS	PSC	Quart	16 qt	XXXXX	92186	KT 2000 Precision Cleaner	Quart	16 Quarts	Yes	XXXXX
LPS	HDX Degreaser	Quart	16 qt	XXXXX	92186	Clear-Frost Degreaser	Quart	20 Quarts	Yes	XXXXX

Page: 1 OF 3

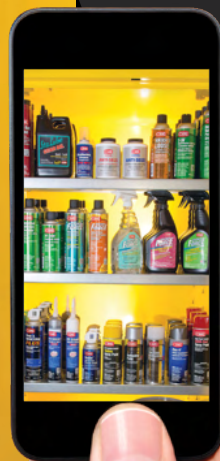





## RISK REDUCTION PARTNERSHIP PLAN® (R2P2®)

The CRC Risk Reduction Partnership Program is much more than a chemical use guide; it drives value to your bottom line. Through this program, CRC works with distributors to help their key customers streamline MRO chemical management and document cost savings realized through the program.

## STOPLIGHT® FOOD SAFETY PROGRAM

Developed in response to a growing need within the industry to minimize the risk of food contamination from maintenance chemicals across all food processing areas, the StopLight® Food Safety Program helps to ensure proper product usage, minimum risk and cost, and helps you meet FSMA (Food Safety Modernization Act) requirements.



## WATER RESTORATION

Plan ahead for recovery of water damaged electrical and electronic equipment with the CRC step-by-step Water Restoration Guide. CRC precision cleaners, degreasers and lubricants, together with our proven restoration procedure, significantly reduce damage and can lead to complete recovery of flooded equipment.

## SAFETY SHORTS – TRAINING

CRC offers Safety Shorts Training for groups of any size in your facility. Our training presentations cover a variety of topics including Chemical Handling, Fire Safety, General Aerosol & Chemical Safety, Hazardous Waste, Personal Protective Equipment, Safety Data Sheets and Ventilation.



## По вопросам продаж и поддержки обращайтесь:

Алматы (727)345-47-04  
Ангарск (3955)60-70-56  
Архангельск (8182)63-90-72  
Астрахань (8512)99-46-04  
Барнаул (3852)73-04-60  
Белгород (4722)40-23-64  
Благовещенск (4162)22-76-07  
Брянск (4832)59-03-52  
Владивосток (423)249-28-31  
Владикавказ (8672)28-90-48  
Владимир (4922)49-43-18  
Волгоград (844)278-03-48  
Вологда (8172)26-41-59  
Воронеж (473)204-51-73  
Екатеринбург (343)384-55-89

Иваново (4932)77-34-06  
Ижевск (3412)26-03-58  
Иркутск (395)279-98-46  
Казань (843)206-01-48  
Калининград (4012)72-03-81  
Калуга (4842)92-23-67  
Кемерово (3842)65-04-62  
Киров (8332)68-02-04  
Коломна (4966)23-41-49  
Кострома (4942)77-07-48  
Краснодар (861)203-40-90  
Красноярск (391)204-63-61  
Курск (4712)77-13-04  
Курган (3522)50-90-47  
Липецк (4742)52-20-81

Магнитогорск (3519)55-03-13  
Москва (495)268-04-70  
Мурманск (8152)59-64-93  
Набережные Челны (8552)20-53-41  
Новокузнецк (3843)20-46-81  
Ноябрьск (3496)41-32-12  
Новосибирск (383)227-86-73  
Омск (3812)21-46-40  
Орел (4862)44-53-42  
Оренбург (3532)37-68-04  
Пенза (8412)22-31-16  
Петрозаводск (8142)55-98-37  
Псков (8112)59-10-37  
Пермь (342)205-81-47

Ростов-на-Дону (863)308-18-15  
Рязань (4912)46-61-64  
Самара (846)206-03-16  
Санкт-Петербург (812)309-46-40  
Саратов (845)249-38-78  
Севастополь (8692)22-31-93  
Саранск (8342)22-96-24  
Симферополь (3652)67-13-56  
Смоленск (4812)29-41-54  
Сочи (862)225-72-31  
Ставрополь (8652)20-65-13  
Сургут (3462)77-98-35  
Сыктывкар (8212)25-95-17  
Тамбов (4752)50-40-97  
Тверь (4822)63-31-35

Тольятти (8482)63-91-07  
Томск (3822)98-41-53  
Тула (4872)33-79-87  
Тюмень (3452)66-21-18  
Ульяновск (8422)24-23-59  
Улан-Удэ (3012)59-97-51  
Уфа (347)229-48-12  
Хабаровск (4212)92-98-04  
Чебоксары (8352)28-53-07  
Челябинск (351)202-03-61  
Череповец (8202)49-02-64  
Чита (3022)38-34-83  
Якутск (4112)23-90-97  
Ярославль (4852)69-52-93

**Россия** +7(495)268-04-70

**Казахстан** +7(727)345-47-04

**Беларусь** +(375)257-127-884

**Узбекистан** +998(71)205-18-59

**Киргизия** +996(312)96-26-47

эл.почта: [cce@nt-rt.ru](mailto:cce@nt-rt.ru) || сайт: <https://crc.nt-rt.ru/>